


Product Data Sheet

EXCLUSIV Single Valve with Cone Inserts and Male Thread

Connection valve with ball shut-off for radiators with integrated valve, control head with a concealed stop, with cone inserts for radiators with integrated valve with G 3/4" M (Euro taper) connection.
With G 3/4" M (Euro taper) on the pipe side.

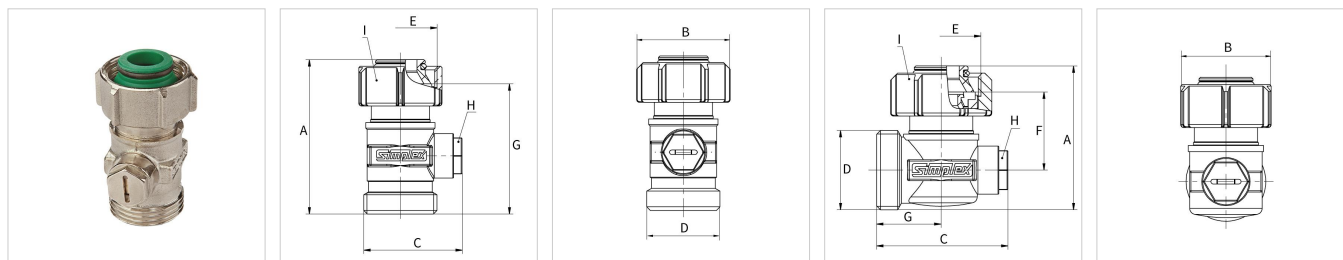

Type	Version	Connection		###	Article no.
		D (ET)	E		
EKH EXCLUSIV D2/AG	straight	G 3/4" M	G 3/4" F	1 / 10	F10020
EKH EXCLUSIV E2/AG	angle	G 3/4" M	G 3/4" F	1 / 10	F10021

Type	Dimensions [mm]						
	A	B	C	F	G	H (WS)	I (WS)
EKH EXCLUSIV D2/AG	55.7	34	39.0		47.0	13	30
EKH EXCLUSIV E2/AG	47.9	34	43.7	26	21.5	13	30

Advantages

- Union nut on the radiator site with radial and axial clearance for fitting valves on radiators without tension
- Matching compression adapters available!


Technical information

- Max. operating temperature: 110 °C permanent temperature, 130 °C short-term
- Max. operating pressure: 10 bar
- Operating medium: Heating water in accordance with VDI 2035

Materials

- Housing, union nuts: Nickel-plated brass
- Cone inserts: Hydrolysis-resistant polyamide
- Ball: Hard chrome-plated brass
- Ball seal: PTFE
- Spindles: Brass
- Control cap: Nickel-plated zinc die-cast
- Seals: EPDM

Hard chrome-plated ball in a Teflon seat, spindle with double O-ring seal and concealed rotational stop.

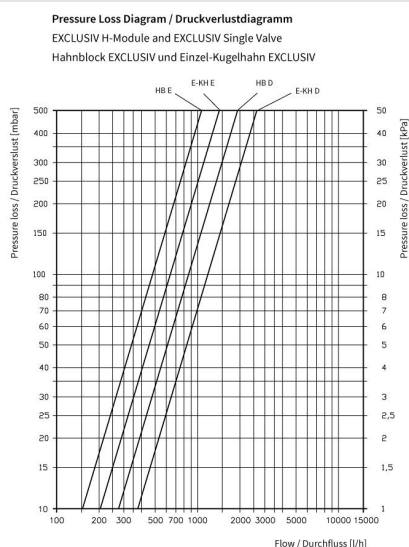

Version	Art. no. / Art.Nr.	k _v
Single Valve straight / Einzel-Kugelhahn Durchg.	E-KH D F10018, F10022, F10020, F10024	3,7
Single Valve angle / Einzel-Kugelhahn Eck	E-KH E F10019, F10023, F10021, F10025	2,0
H-Module straight / Zweirohr-Hahnblock Durchg.	HB D F10010, F10014	2,7
H-Module angle / Zweirohr-Hahnblock Eck	HB E F10012, F10016	1,5

Find more information online:

[Extra documentation](#)

Simplex Armaturen & Systeme GmbH
Isnyer Straße 28
88260, Argenbühl - Eisenharz - de
+ 49 75 66 94 08-0
info@simplex-armaturen.de
www.simplex-armaturen.de