


Product Data Sheet

Pressure Test Bridge with Quick Fastener

Pressure test bridge for pressure testing, venting and draining, axial distance 50 mm, with air plug, connection of fill and drain plugs possible.

Please note: Use for pressure test, maximum test pressure of 15 bar. Not suitable for continuous heating mode.
With quick fastener, for copper, carbon steel and stainless steel pipes.

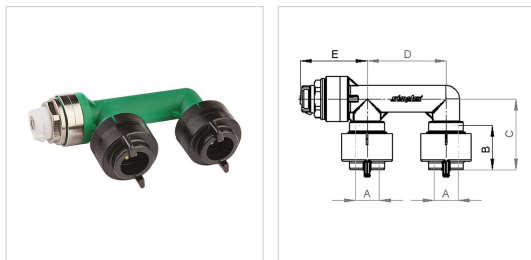

Type	Connection A Ø [mm]	Dimensions [mm]				###	Article no.
		B	C	D	E		
Pressure Test Bridge Fast	15	28	45	50	43	1 / 5	F10088

Advantages

- Tool-free installation
- Fixed axial distance of 50 mm
- Reduced installation time
- Reusable

Technical information

- Components made of plastic and brass
- Sealing materials: EPDM

Find more information online:

[Manuals](#)

[Extra documentation](#)