


## Product Data Sheet

### Reverser with Cone Inserts for Reversed Supply and Return Pipes

Compact shut-off connection valve for radiators with integrated valve, with Euro taper on the pipe side for connection with compression adapters, 50 mm axial distance.

With cone inserts for radiators with integrated valve with G 3/4" M (Euro taper) connection.

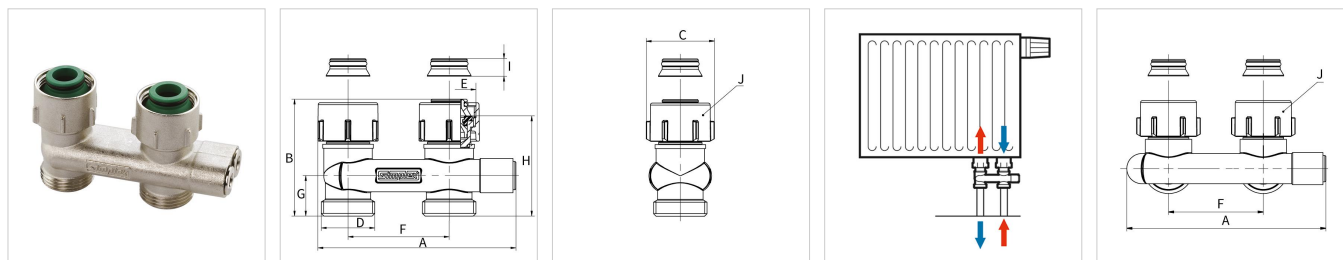

Type	Version	Connection		###	Article no.
		D (ET)	E		
US D2/50	straight	G 3/4" M	G 3/4" F	1 / 5	F10078
US E2/50	angle	G 3/4" M	G 3/4" F	1 / 5	F10079

Type	Dimensions [mm]							
	A	B	C	F	G	H	I	J (WS)
US D2/50	98	58	34.0	50	20	49.5	8.7	30
US E2/50	105	49	42.5	50	27	29.5	8.7	30

### Advantages


- For connections without crossover for reversed supply and return pipes
- Can easily replace a two-pipe H-module
- Matching compression adapters available!

### Technical information

- Max. operating temperature: 110 °C permanent temperature, 130 °C short-term.
- Max. operating pressure: 10 bar.
- Operating medium: Heating water in accordance with VDI 2035

#### Materials

- Housing, union nuts: Nickel-plated brass
- Cone inserts: Hydrolysis-resistant polyamide
- Spindles: Brass
- Seals: EPDM

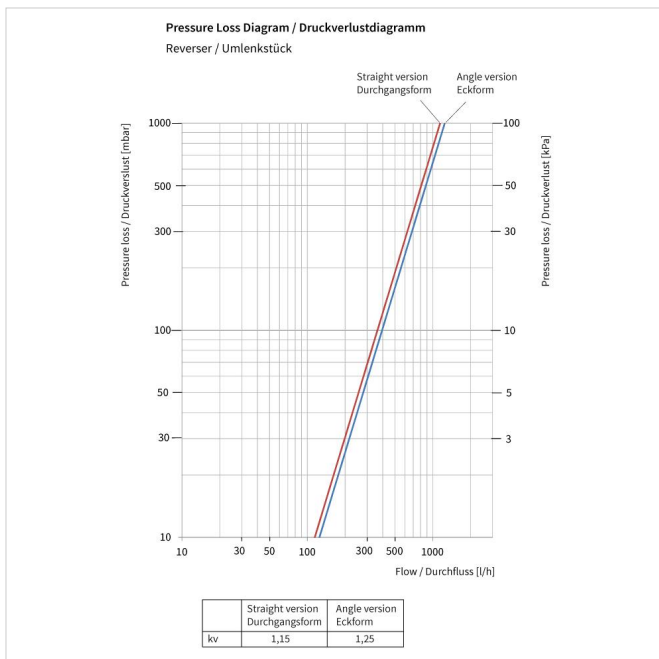

### Find more information online:

[Extra documentation](#)

Simplex Armaturen & Systeme GmbH  
Isnyer Straße 28  
88260, Argenbühl - Eisenharz - de  
+ 49 75 66 94 08-0  
[info@simplex-armaturen.de](mailto:info@simplex-armaturen.de)  
[www.simplex-armaturen.de](http://www.simplex-armaturen.de)