


Product Data Sheet

VARIOCON U Connection Valve with Connection Nipples

Connection valve with shut-off for radiators with integrated valve, for one-pipe (radiator supply ratio 25 - 100%) or two-pipe operation, swivelling for angle or straight connection, left or right connection, draining or filling without adapter, simply by connecting a standard hose connection, with Euro taper on the pipe side for connection with compression adapters, 50 mm axial distance, 25 mm axial offset.

With self-sealing connection nipples for radiators with integrated valve with Rp 1/2" connection.

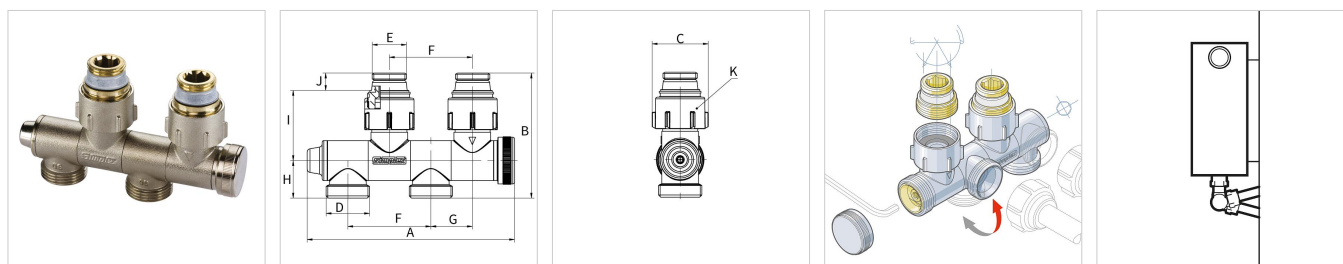

Type	Version	Connection		###	Article no.
		D (ET)	E		
HB VARIOCON U1	straight and angle	G 3/4" M	G 1/2" M	1 / 5	F10026

Type	Dimensions [mm]								
	A	B	C	F	G	H	I	J	K (WS)
HB VARIOCON U1	124.5	75	34	50	25	22.5	42.1	10.4	30

Advantages


- 4 connection options
- Draining or filling without adapter
- For one-pipe or two-pipe operation
- Union nut on the radiator site with radial and axial clearance for fitting valves on radiators without tension
- Matching design covers and compression adapters available!

Technical information

- Max. operating temperature: 110 °C permanent temperature, 130 °C short-term
- Max. operating pressure: 10 bar
- Operating medium: Heating water in accordance with VDI 2035


Materials

- Housing, union nuts, side plugs: Nickel-plated brass
- Connection nipples, shut-off spindles: Brass
- Seals: EPDM

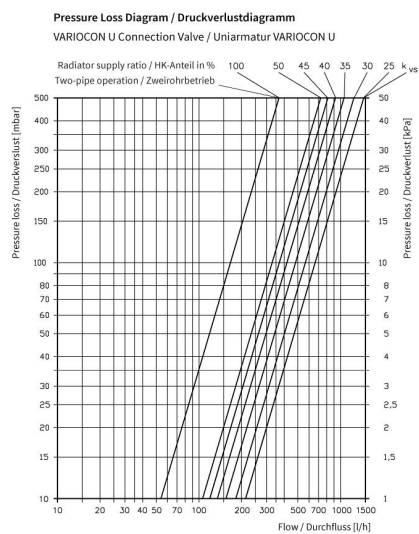

Measuring with radiator with integrated valve and thermostatic valve
with 2K proportional deviation at the thermostatic valve
Messung mit V-Kompaktheizkörper und Thermostatventil
bei 2K-Proportionalabweichung am Thermostatventil

Bypass Presetting / Einstellung Bypass
VARIOCON U Connection Valve / Uniarmatur VARIOCON U

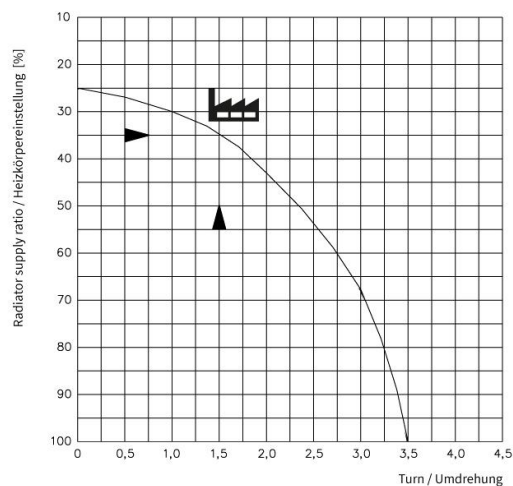

Turn = right-hand rotation from "open" position
Umdrehung = Rechtsdrehung aus Stellung „Auf“

Find more information online:

[Manuals](#)

[Extra documentation](#)

Simplex Armaturen & Systeme GmbH
Isnyer Straße 28
88260, Argenbühl - Eisenharz - de
+ 49 75 66 94 08-0
info@simplex-armaturen.de
www.simplex-armaturen.de