


Product Data Sheet

VARIOCON U Connection Valve with Cone Inserts

Connection valve with shut-off for radiators with integrated valve, for one-pipe (radiator supply ratio 25 - 100%) or two-pipe operation, swivelling for angle or straight connection, left or right connection, draining or filling without adapter, simply by connecting a standard hose connection, with Euro taper on the pipe side for connection with compression adapters, 50 mm axial distance, 25 mm axial offset.

With cone inserts for radiators with integrated valve with G 3/4" M (Euro taper) connection.

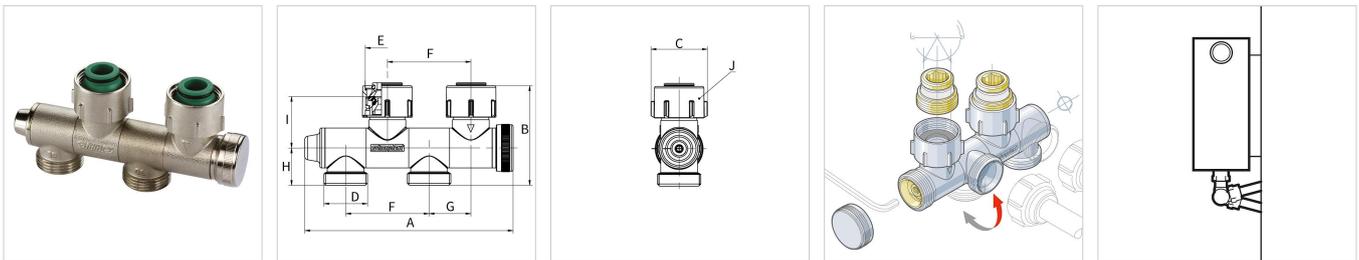

Type	Version	Connection		###	Article no.
		D (ET)	E		
HB VARIOCON U2	straight and angle	G 3/4" M	G 3/4" F	1 / 5	F10027

Type	Dimensions [mm]							
	A	B	C	F	G	H	I	J (WS)
HB VARIOCON U2	124.5	64.5	34	50	25	22.5	31	30

Advantages



- 4 connection options
- Draining or filling without adapter
- For one-pipe or two-pipe operation
- Union nut on the radiator site with radial and axial clearance for fitting valves on radiators without tension
- Matching design covers and compression adapters available!

Technical information

- Max. operating temperature: 110 °C permanent temperature, 130 °C short-term
- Max. operating pressure: 10 bar
- Operating medium: Heating water in accordance with VDI 2035

Materials

- Housing, union nuts, side plugs: Nickel-plated brass
- Cone inserts: Hydrolysis-resistant polyamide
- Shut-off spindles: Brass
- Seals: EPDM

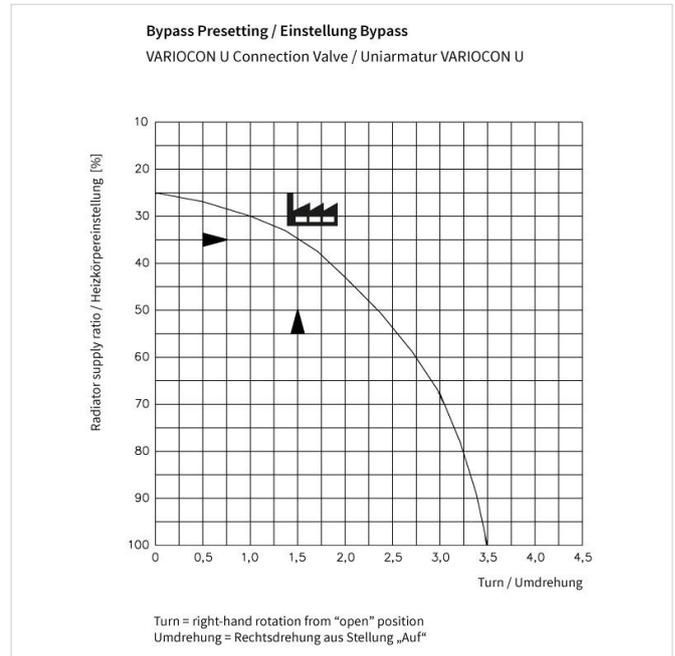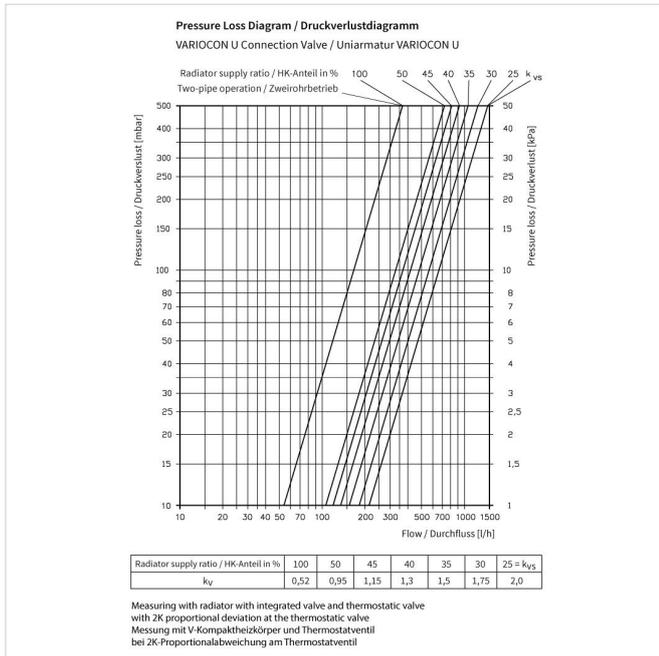

Find more information online:

- [Manuals](#)
- [Extra documentation](#)

Simplex Armaturen & Systeme GmbH
 Isnyer Straße 28
 88260, Argenbühl - Eisenharz - de
 + 49 75 66 94 08-0
info@simplex-armaturen.de
www.simplex-armaturen.de