


## Product Data Sheet

### VARIOCON N Connection Valve with Cone Inserts

Connection valve with shut-off for radiators with integrated valve, swivelling for angle or straight connection, left or right connection, with Euro taper on the pipe side for connection with compression adapters, 50 mm axial distance, 25 mm axial offset. With cone inserts for radiators with integrated valve with G 3/4" M (Euro taper) connection.

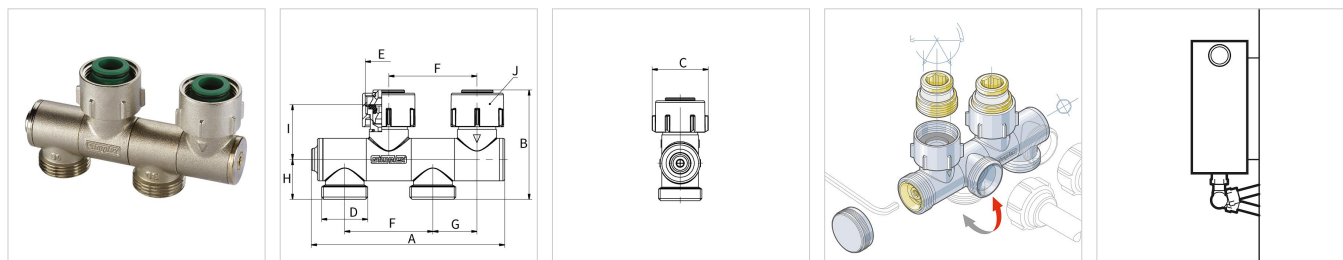

Type	Version	Connection		###	Article no.
		D (ET)	E		
HB VARIOCON N2	straight and angle	G 3/4" M	G 3/4" F	1 / 5	F12002

Type	Dimensions [mm]							
	A	B	C	F	G	H	I	J (WS)
HB VARIOCON N2	109	62	34	50	25	22.5	31	30

### Advantages


- Continuously swivelling connections for a flexible installation
- 4 connection options
- Union nut on the radiator site with radial and axial clearance for fitting valves on radiators without tension
- Matching design covers and compression adapters available!

### Technical information

- Max. operating temperature: 110 °C permanent temperature, 130 °C short-term
- Max. operating pressure: 10 bar
- Operating medium: Heating water in accordance with VDI 2035

#### Materials

- Housing, union nuts, side plugs: Nickel-plated brass
- Cone inserts: Hydrolysis-resistant polyamide
- Shut-off spindles: Brass
- Seals: EPDM

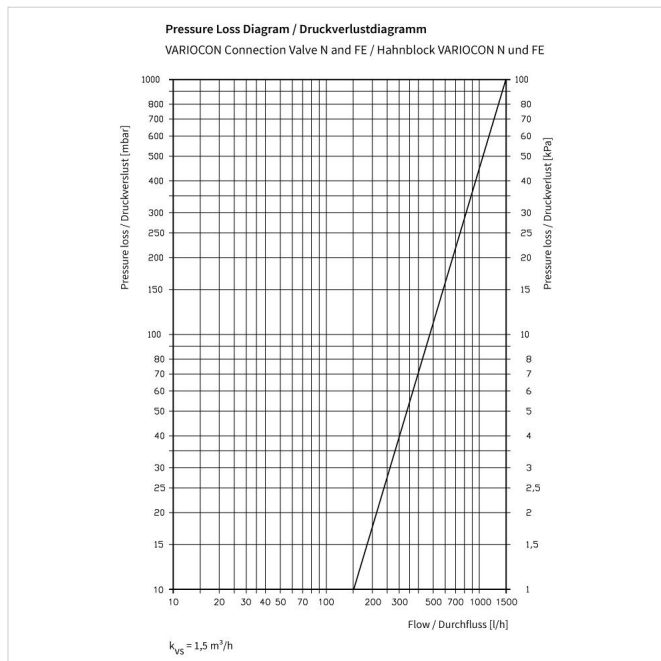

### Find more information online:

[Manuals](#)

[Extra documentation](#)

Simplex Armaturen & Systeme GmbH  
Isnyer Straße 28  
88260, Argenbühl - Eisenharz - de  
+ 49 75 66 94 08-0  
[info@simplex-armaturen.de](mailto:info@simplex-armaturen.de)  
[www.simplex-armaturen.de](http://www.simplex-armaturen.de)