


Product Data Sheet

Design Thermostatic Head SENSITIVE

Comap thermostatic head with threaded connection M 30 x 1.5 and built-in fluid sensor, modern perforated design, limitation of the minimum temperature, concealed threaded nut, without zero position.

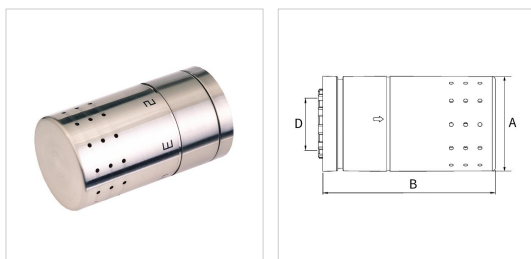

Type	Version	Connection (D)	Dimensions [mm]		###	Article no.
			A (Ø)	B		
TK SENSITIVE - W	white (RAL 9016)	M 30 x 1.5	46	82	1 / 12	C102000
TK SENSITIVE - C	chrome	M 30 x 1.5	46	82	1 / 12	C102100
TK SENSITIVE - E	stainless steel	M 30 x 1.5	46	82	1 / 12	C102200

Technical information

- Setpoint value range: 7 - 28 °C
- Frost protection: about 7 °C

Find more information online:

[Extra documentation](#)

Simplex Armaturen & Systeme GmbH
Isnyer Straße 28
88260, Argenbühl - Eisenharz - de
+ 49 75 66 94 08-0
info@simplex-armaturen.de
www.simplex-armaturen.de