


Product Data Sheet

Threaded Connection with Euro Taper

Threaded Connection for use in heating systems, self-sealing with special thread seal, taper elastically sealed.

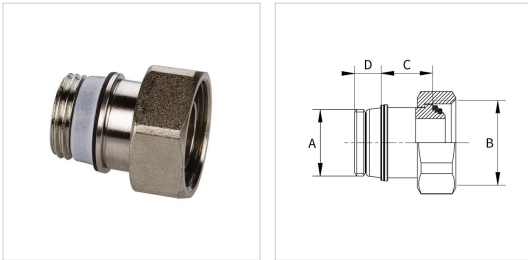

Type	Version	Connection		Dimensions [mm]		###	Article no.
		A	B (ET)	C	D		
Conn. ET Ni - 3/8 x 5/8	nickel-plated	G 3/8" M	G 5/8" F	16	9	25/200	F10316
Conn. ET Ni - 1/2 x 5/8	nickel-plated	G 1/2" M	G 5/8" F	14	11	25/200	F10317
Conn. ET bl. - 1/2 x 3/4	blank	G 1/2" M	G 3/4" F	16	11	25/100	F10314
Conn. ET Ni - 1/2 x 3/4	nickel-plated	G 1/2" M	G 3/4" F	16	11	25/200	F10318
Conn. ET bl. - 3/4 x 1	blank	G 3/4" M	G 1" F	15	11	10/100	F10315
Conn. ET Ni - 3/4 x 1	nickel-plated	G 3/4" M	G 1" F	20	11	10/100	F10319

Technical information

- Components made of brass
- Sealing materials: EPDM
- Max. operating temperature: 110 °C permanent temperature, 130 °C short-term
- Max. operating pressure: 10 bar
- Operating medium: Heating water in accordance with VDI 2035

Find more information online:

[Extra documentation](#)