


Product Data Sheet

STANDARD V Fill and Drain Plug, Spout Body in Metal

Fill and drain plug for radiators, blanking cap serves as operating key, with O-ring seal.

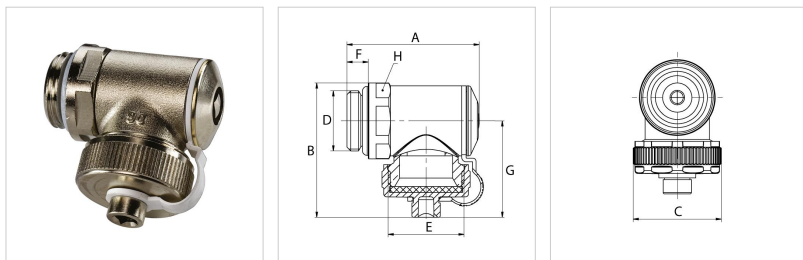

Type	Version	Connection		Dimensions [mm]						###	Article no.
		D	E	A	B	C	F	G	H (WS)		
FES-V bl. - 3/8 x 3/4	blank	G 3/8" M	G 3/4" M	43	46	30	7	33	24	10/100	F10605
FES-V Ni. - 3/8 x 3/4	nickel-plated	G 3/8" M	G 3/4" M	43	46	30	7	33	24	10/100	F10613
FES-V bl. - 1/2 x 3/4	blank	G 1/2" M	G 3/4" M	46	46	30	8	33	24	10/100	F10607
FES-V Ni. - 1/2 x 3/4	nickel-plated	G 1/2" M	G 3/4" M	46	46	30	8	33	24	10/100	F10608

Technical information

- Components made of brass
- Sealing materials: EPDM
- Max. operating temperature: 110 °C permanent temperature, 130 °C short-term
- Max. operating pressure: 10 bar

Find more information online:

[Extra documentation](#)

Simplex Armaturen & Systeme GmbH
Isnyer Straße 28
88260, Argenbühl - Eisenharz - de
+ 49 75 66 94 08-0
info@simplex-armaturen.de
www.simplex-armaturen.de