


## Product Data Sheet

### BSU Clips

BSU clips are designed for mounting steel pipes to the wall or ceiling.

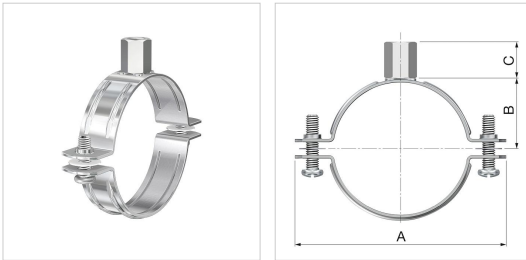

Type	Ø Pipe		Connection	Strip dimensions [mm]	Max. working load [N]	Dimensions			###	Order Code
	Ext. dia. [mm]	Nom. ["]				A [mm]	B [mm]	C [mm]		
<b>BSU M 8/10 x 15 - 18</b>	15 - 18	$\frac{3}{8}$	M 8/10	20 x 1.5	1000	50	11	16	50	38270
<b>BSU M 8/10 x 20 - 25</b>	20 - 25	$\frac{1}{2}$	M 8/10	20 x 1.5	1000	60	16	16	50	38271
<b>BSU M 8/10 x 26 - 30</b>	26 - 30	$\frac{3}{4}$	M 8/10	20 x 1.5	1000	64	19	16	50	38272
<b>BSU M 8/10 x 32 - 36</b>	32 - 36	1	M 8/10	20 x 1.5	1000	71	22	16	50	38273
<b>BSU M 8/10 x 38 - 43</b>	38 - 43	$1 \frac{1}{4}$	M 8/10	20 x 1.5	1000	79	25	16	50	38274
<b>BSU M 8/10 x 44 - 49</b>	44 - 49	$1 \frac{1}{2}$	M 8/10	20 x 1.5	1000	84	28	16	50	38275
<b>BSU M 8/10 x 56 - 61</b>	56 - 61	2	M 8/10	20 x 1.5	1000	93	34	16	50	38276
<b>BSU M 8/10 x 62 - 67</b>	62 - 67		M 8/10	20 x 1.5	1000	109	36	16	50	38286
<b>BSU M 8/10 x 75 - 80</b>	75 - 80	$2 \frac{1}{2}$	M 8/10	20 x 2.0	1300	118	44	16	50	38277
<b>BSU M 8/10 x 87 - 92</b>	87 - 92	3	M 8/10	20 x 2.0	1300	129	50	16	50	38278
<b>BSU M 8/10 x 108 - 116</b>	108 - 116	4	M 8/10	20 x 2.5	2150	160	62	16	25	38279
<b>BSU M 8/10 x 121 - 127</b>	121 - 127		M 8/10	20 x 2.5	2150	160	66	16	25	38287
<b>BSU M 10/12 x 108 - 116</b>	108 - 116	4	M 10/12	20 x 2.5	2150	160	62	18	25	38282
<b>BSU M 10/12 x 131 - 141</b>	131 - 141	5	M 10/12	20 x 2.5	2150	188	75	18	25	38283
<b>BSU M 10/12 x 165 - 169</b>	165 - 169	6	M 10/12	20 x 2.5	2150	220	89	18	10	38284

### Advantages

- With retaining ring.
- Close fitting possible.
- Bolt with slot and cross head.
- Suitable for high loads and temperatures.

### Technical information

- Clip: electrolytically zinc plated.
- Compatible with pipe sizes as per DIN 2448.
- Safety margin for minimal breaking load (V) = 3.

### Find more information online:

[CAD drawings](#)

[Extra documentation](#)