

## Product Data Sheet (2019-08-01)


### VARIODESIGN Regulator Valve

Set consisting of:

1 pc. connection valve with shut-off and pre-adjustable valve insert for towel and design radiators, connection thread M 30 x 1.5, combines angle and straight design, convertible for right- or left-side connection, integrated fill and drain valve for hose connections, with self-sealing connection nipples and cone inserts for towel and design radiators with Rp  $\frac{1}{2}$ " or G  $\frac{3}{4}$ " M (Euro taper) connection, with Euro taper on the pipe side for connection with compression adapters, axial distance 50 mm, with adjustment key,

1 pc. design cover made of plastic with polished optics,

1 pc. design thermostic head, infinitely pre-adjustable, with frost protection.

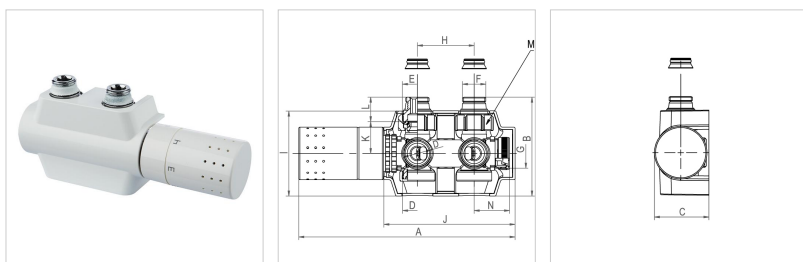

Type	Colour	Version	Connection		Draining (G)	###	Article no.
			D (ET)	E / F			
<b>VH VARIODESIGN W</b>	white*	connection right/left convertible	G $\frac{3}{4}$ " M	G $\frac{3}{4}$ " F / G $\frac{1}{2}$ " M	G $\frac{3}{4}$ " M	1	F12060
<b>VH VARIODESIGN C</b>	chromed	connection right/left convertible	G $\frac{3}{4}$ " M	G $\frac{3}{4}$ " F / G $\frac{1}{2}$ " M	G $\frac{3}{4}$ " M	1	F12061

\* similar to RAL 9016


Type	Dimensions [mm]									
	A	B	C	H	I	J	K	L	M (WS)	N
<b>VH VARIODESIGN W</b>	190.5	87	48	50	75	115.5	28	21.5	30	31
<b>VH VARIODESIGN C</b>	190.5	87	48	50	75	115.5	28	21.5	30	31

### Advantages

- Attractive design
- 4 connection options
- Infinitely pre-adjustment
- Simple filling and draining
- Matching compression adapters available!

## Technical information

- Components made of nickel-plated brass and plastic
- Sealing materials: EPDM
- Max. operating temperature: 110 °C permanent temperature, 130 °C short-term
- Max. operating pressure: 10 bar
- Operating medium: Heating water in accordance with VDI 2035

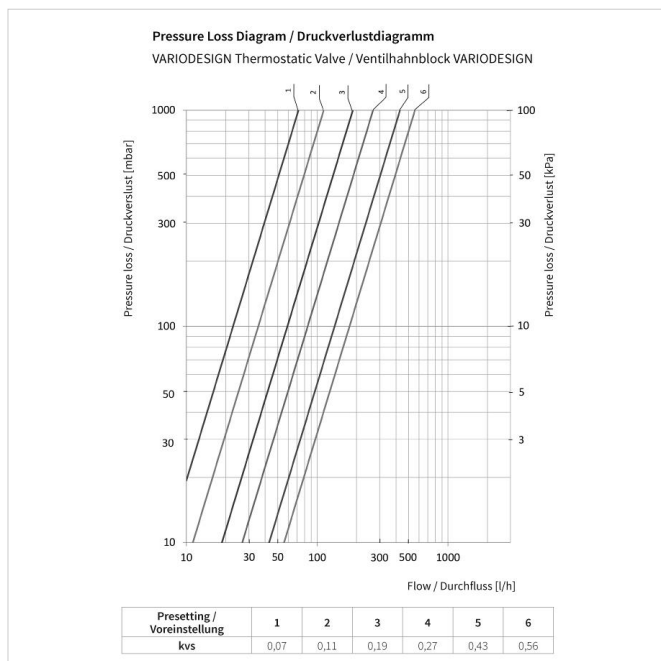

## Find more information online:

[Manuals](#)

[Extra documentation](#)

[Animations](#)

Simplex Armaturen & Systeme GmbH  
Isnyer Straße 28  
88260, Argenbühl - Eisenharz - de  
+ 49 75 66 94 08-0  
[info@simplex-armaturen.de](mailto:info@simplex-armaturen.de)  
[www.simplex-armaturen.de](http://www.simplex-armaturen.de)