


Product Data Sheet

GP Backplates 80 x 30

For a rigid wall or ceiling fastening of a clip by means of a threaded rod/pipe.

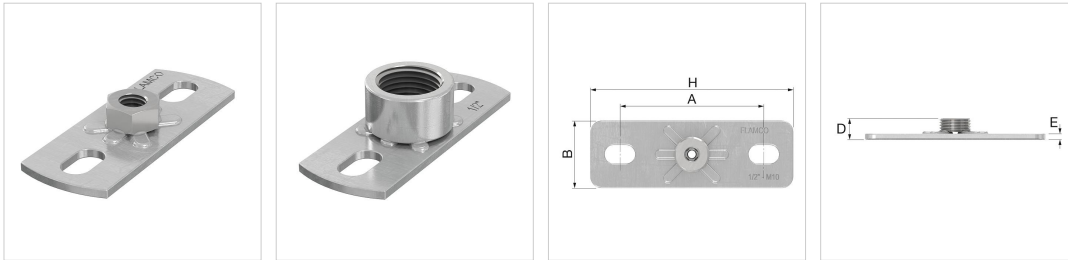

| Type | Connection | Dimensions | | | | | | ### | Order Code |
|---------------------------------------|----------------------------|------------|--------|--------|--------|--------|-------------------|-----|------------|
| | | A [mm] | B [mm] | H [mm] | D [mm] | E [mm] | Slotted hole [mm] | | |
| SR2-L - R $\frac{3}{8}$ " | R $\frac{3}{8}$ " | 54 | 30 | 80 | 15 | 3 | 9 x 16 | 50 | 39440 |
| GP 8 / 10 - 80 x 30 | M 8 / 10 | 54 | 30 | 80 | 18 | 3 | 9 x 16 | 50 | 39410 |
| GP 8 - 80 x 30 * | M 8 | 54 | 30 | 80 | 11 | 3 | 9 x 16 | 50 | 39417 |
| GP 10 - 80 x 30 * | M 10 | 54 | 30 | 80 | 13 | 3 | 9 x 16 | 50 | 39413 |
| GP 12 - 80 x 30 | M 12 | 54 | 30 | 80 | 15 | 3 | 9 x 16 | 50 | 39415 |
| GP $\frac{1}{2}$ " - 80 x 30 * | $\frac{1}{2}$ " F | 54 | 30 | 80 | 18 | 3 | 9 x 16 | 50 | 39418 |
| GP $\frac{1}{2}$ " / M 10 - 80 x 30 * | $\frac{1}{2}$ " M / M 10 F | 54 | 30 | 80 | 11 | 3 | 9 x 16 | 50 | 39409 |

*Also available in stainless steel (Inox V 4 A, 1.4435).

Advantages

- Slotted holes for fixing.
- Can also be used in fixed point constructions, in combination with KB clips or RSF clips.

Technical information

- Electrolytically zinc plated.

Find more information online:

[Extra documentation](#)