




NP453 Stainless Steel Ball Valve

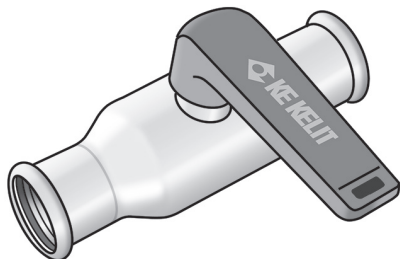

Product description:

Ball valve with full passage, water flows through the ball valve passing the ball and base body, made from stainless steel 1.4404, including EPDM-sealing elements „Leak Before Pressed“.

Press contour: M



CODEMARK™

Product features:

Material of the casing	stainless steel	Material class	stainless steel 316 L (1.4404)
Material of the ball sealing	Polytetrafluorethylene (PTFE)	Material of the ball	stainless steel
Material of the spindle	stainless steel	Material of the primary spindle seal	Polytetrafluorethylene (PTFE)
Material of the secondary spindle seal	Ethylene propylene diene monomere rubber (EPDM)	Maximum mean temperature (constant)	120 °C
Minimal temperature of the medium (constant)	-35 °C	Operated by	handle


Product List:

Art.-Nr.	Dimension	Weight	PU1	PU2	Quantity Unit
53728BB0	15	0,17 KGM	1	25	SA1
53728CC0	18	0,22 KGM	1	25	SA1
53728DD0	22	0,22 KGM	1	15	SA1
53728EE0	28	0,56 KGM	1	10	SA1
53728FF0	35	0,86 KGM	1	10	SA1
53728GG0	42	1,4 KGM	1	7	SA1
53728HH0	54	2,33 KGM	1	5	SA1





NP453 Stainless Steel Ball Valve

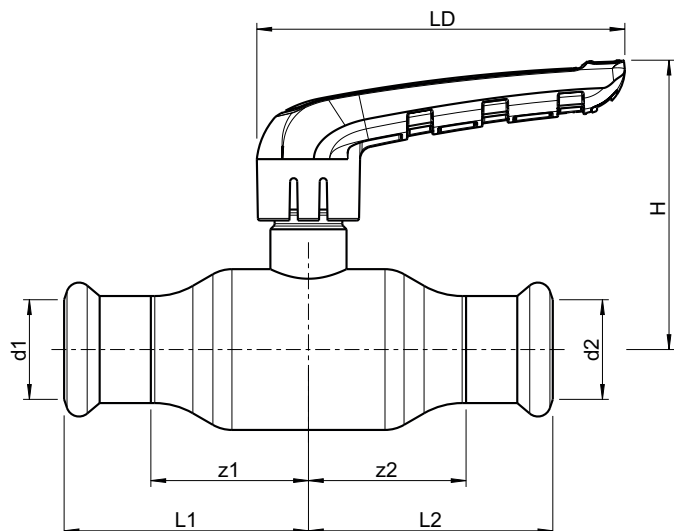

Art.-Nr.	Dimension	d1 mm	d2 mm	L1 mm	z1 mm	L2 mm	z2 mm	H mm	LD mm
53728BB0	15	15	15	47	27	47	27	64	75
53728CC0	18	18	18	51.5	32	51.5	32	66	75
53728DD0	22	22	22	60.5	40	60.5	40	68	75
53728EE0	28	28	28	67.5	45	67.5	45	87	100
53728FF0	35	35	35	80.5	55	80.5	55	93	100
53728GG0	42	42	42	99	69	99	69	106	119
53728HH0	54	54	54	113	79	113	79	114	119

