

Universal, handy electric tool with switch-off signal for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints Ø 10–108 (110) mm / Ø ¾–4

Complete range of REMS pressing tongs/pressing rings for all common pressfitting systems, see page 182–212.

REMS Akku-Press – universal up to Ø 110 mm.

Secure crimping in seconds.

Automatic locking of pressing tongs.

Li-Ion 14.4 V, 3.0 Ah battery for approx. 270 pressings

Viega Profipress DN 15 with one battery charge.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection (**Patent EP 1 223 008, Patent US 6,739,172**) and also fit the manual radial press REMS Eco-Press.

Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 182–212). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 212.

Design

Compact, handy, light. Drive unit with battery only 4.3 kg. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. LED work light for illuminating the work place. Swivelling pressing tongs seat. Secure seating of pressing tongs/adapter tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control

For reliable service, operating and functional safety. A perfect joint is achieved when pressing tongs close completely. Acoustic signal after successful completion of pressing operation. The pressing tongs remain in a closed position until reset button is pushed and releases. This way, the perfect pressing joint (completely closed pressing jaws) can be observed.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 3.0 Ah capacity, for long service life. Light and powerful. Li-Ion 14.4 V, 3.0 Ah battery for approx. 270 pressings Viega Profipress DN 15 with one battery charge. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger Li-Ion/Ni-Cd 220–240 V or 110 V, 10.8–18 V, 65 W, for short charging times. 220–240 V/14.4 V, 33 A, voltage supply for mains operation instead of Li-Ion battery 14.4 V, as accessory.



Tested by electrosuisse»

German Quality Product

REMS TECHNOLOGY
LI-ION PLUS

International
Design Award

LED



Supply format

REMS Akku-Press Basic-Pack. Cordless radial press 32 kN with switch-off signal for producing pipe pressing joints Ø 10–108 (110) mm, Ø ¾–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-Ion 14.4 V, 3.0 Ah, rapid charger Li-Ion/Ni-Cd 220–240 V or 110 V, 50–60 Hz, 10.8–18 V, 65 W.

Version	Art.-No.	
In sturdy steel case.	571013	
In L-Boxx system case.	571020	
Other voltages on request.		



Accessories

Description	Art.-No.	
REMS pressing tongs/pressing rings see page 182–212.		
REMS cropping tongs for threaded rods see page 215.		
REMS cable shear for electric cable see page 215.		
REMS Akku-Press drive unit , without battery	571003	
Battery Li-Ion 14.4 V, 3.0 Ah	571555	
Rapid charger Li-Ion/Ni-Cd 220–240 V, 50–60 Hz, 10.8–18 V, 65 W	571560	
Voltage supply 220–240 V/14.4 V, 50–60 Hz, 33 A , for mains operation instead of battery Li-Ion 14.4 V.	571565	
Steel case with inlay	571290	
L-Boxx system case with inserts	571283	
REMS cordless LED lamp see page 105	175200	



REMS Akku-Press ACC

Cordless radial press 32 kN with automatic circuit control

Universal, handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints Ø 10–108 (110) mm / Ø 3/8–4

Complete range of REMS pressing tongs/
pressing rings for all common pressfitting systems,
see page 182–212.

**REMS Akku-Press ACC – universal up to Ø 110 mm.
With automatic circuit control. Secure crimping
in seconds. Automatic locking of pressing tongs.
Li-Ion 14.4 V, 3.0 Ah battery for approx. 270 pressings
Viega Profipress DN 15 with one battery charge.**

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection (**Patent EP 1 223 008, Patent US 6,739,172**) and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 182–212). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 212.

Design

Compact, handy, light. Drive unit with battery only 4.3 kg. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. LED work light for illuminating the work place. Swivelling pressing tongs seat. Secure seating of pressing tongs/adapter tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion PLUS technology. Highly resistant Li-Ion 14.4 V battery with 3.0 Ah capacity, for long service life. Light and powerful. Li-Ion 14.4 V, 3.0 Ah battery for approx. 270 pressings Viega Profipress DN 15 with one battery charge. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger Li-Ion/Ni-Cd 220–240 V or 110 V, 10.8–18 V, 65 W, for short charging times. 220–240 V/14.4 V, 33 A, voltage supply for mains operation instead of Li-Ion battery 14.4 V, as accessory.



Tested by electro**suisse** >>

German Quality Product

REMS TECHNOLOGY
LI-ION PLUS

International
Design Award

LED



Info

Supply format

REMS Akku-Press ACC Basic-Pack. Cordless radial press 32 kN with automatic circuit control for producing pipe pressing joints Ø 10–108 (110) mm, Ø ¾–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-Ion 14.4 V, 3.0 Ah, rapid charger Li-Ion/Ni-Cd 220–240 V or 110 V, 50–60 Hz, 10.8–18 V, 65 W.

Version	Art.-No.
In sturdy steel case.	571014
In L-Boxx system case.	571019

Other voltages on request.



Accessories

Description	Art.-No.
REMS pressing tongs/pressing rings see page 182–212.	
REMS cropping tongs for threaded rods see page 215.	
REMS cable shear for electric cable see page 215.	
REMS Akku-Press ACC drive unit , without battery	571004
Battery Li-Ion 14.4 V, 3.0 Ah	571555
Rapid charger Li-Ion/Ni-Cd 220–240 V, 50–60 Hz, 10.8–18 V, 65 W	571560
Voltage supply 220–240 V/14.4 V, 50–60 Hz, 33 A , for mains operation instead of battery Li-Ion 14.4 V.	571565
Steel case with inlay	571290
L-Boxx system case with inserts	571283
REMS cordless LED lamp see page 105	175200



REMS Akku-Press 22V ACC

Cordless radial press 32 kN with automatic circuit control and pressure monitoring

Universal, handy electric tool with automatic circuit control and pressure monitoring for producing pipe pressing joints for all common pressfitting systems. Li-Ion 22V Technology. For battery and corded operation.

Pipe pressing joints $\varnothing$ 10–108 (110) mm
 $\varnothing$ $\frac{3}{8}$ –4"

Complete range of REMS pressing tongs/pressing rings for all common pressfitting systems, see page 182–212.

REMS Akku-Press ACC – universal up to $\varnothing$ 110 mm. With automatic circuit control and pressure monitoring. Anti-vibration system. Secure crimping in seconds. Automatic locking of pressing tongs. Li-Ion 21.6V, 2.5Ah battery for approx. 200 pressings Viega Profipress DN 15 with one battery charge.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked by a * have another connection (**Patent EP 1 223 008, Patent US 6,739,172**) and also fit the manual radial press REMS Eco-Press. Thus simple, inexpensive stocking.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 182–212). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 212.

Design

Compact, handy, ultra-fast. Drive unit with battery only 3.2 kg. Drive unit with pressing tongs V 15 only 35.5 cm long. Works anywhere, free-hand, overhead, also in particularly tight areas. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing and soft grips. LED work light for illuminating the work place. Machine status check. Swivelling pressing tongs seat, rotation angle $> 360^\circ$. Secure seating of pressing tongs/adapter tongs by automatic locking. Also for other suitable makes of pressing tongs/pressing rings.

Pressure monitoring

Monitoring of the pressure during the pressing process. Pressure evaluation with coloured LED.

Anti-vibration system

Special drive technology with weight balancing and soft grips for low-vibration, fatigue-free pressing.

Pressing operation by touch-control with ACC


For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion 22V Technology. Highly resistant Li-Ion 21.6V battery with 1.5, 2.5, 5.0 or 9.0Ah capacity, for long service life. Light and powerful. Li-Ion 21.6V, 1.5Ah batteries for approx. 120 pressings, 2.5Ah for approx. 200 pressings, 5.0Ah for approx. 400 pressings, 9.0Ah for approx. 720 pressings Viega Profipress DN 15 with one battery charge. Graduated charging state display with coloured LED. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger Li-Ion 100–240V, 90W. Rapid charger Li-Ion 100–240V, 290W, for shorter charging times, as accessory. 220–240V/21.6V, 15A, voltage supply for mains operation instead of Li-Ion battery 21.6 V, as accessory.



Patent EP 1 223 008
Patent US 6,739,172



with automatic circuit control and charging status check




German Quality Product



Tested by electrosuisse



Info

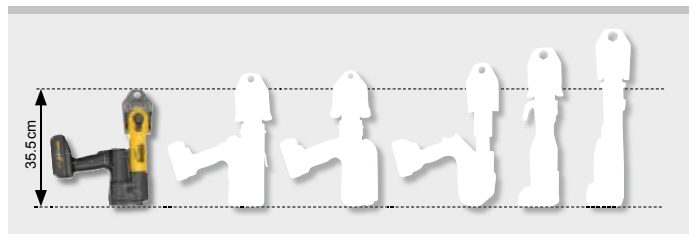

The little one amongst the big. Only 3.2 kg.



Supply format

REMS Akku-Press 22 V ACC Basic-Pack. Cordless radial press 32 kN with automatic circuit control and pressure monitoring for making press joints Ø 10 – 108 (110) mm, Ø 3/8–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Anti-vibration system. Safety tip switch. LED work light. Battery Li-Ion 21.6 V, 2.5 Ah, rapid charger Li-Ion 100–240 V, 50–60 Hz, 90 W.

Version	Art.-No.	
In sturdy steel case.	576010	
In L-Boxx system case.	576011	
Other voltages on request.		



Accessories

Description	Art.-No.	
REMS pressing tongs/pressing rings see page 182–212.		
REMS cropping tongs for threaded rods see page 215.		
REMS cable shear for electric cable see page 215.		
REMS Akku-Press 22 V ACC drive unit, without battery	576000	
Battery Li-Ion 21.6 V, 1.5 Ah	571570	
Battery Li-Ion 21.6 V, 2.5 Ah	571571	
Battery Li-Ion 21.6 V, 5.0 Ah	571581	
Battery Li-Ion 21.6 V, 9.0 Ah	571583	
Rapid charger Li-Ion 100–240 V, 50–60 Hz, 90 W	571585	
Rapid charger Li-Ion 100–240 V, 50–60 Hz, 290 W	571587	
Voltage supply 220–240 V/21.6 V, 50–60 Hz, 15 A, for mains operation instead of battery Li-Ion 21.6 V.	571567	
Steel case with inlay	571290	
L-Boxx system case with inserts	571283	



REMS Akku-Press XL 45 kN 22 V ACC

Cordless radial press XL 45 kN
with automatic circuit control

Universal, powerful electric tool with automatic circuit control for producing XL pipe pressing joints for all common pressfitting systems. Thrust force 45 kN. Li-Ion 22V Technology. For battery and corded operation.

Pipe pressing joints XL	Ø 64 – 108 mm
	Ø 2½–4"

Complete range of REMS pressing rings XL for all common pressfitting systems, see page 182–212.

REMS Akku-Press XL 45 kN 22 V ACC – the powerful one with 45 kN thrust force. Pressing of Ø 64 – 108 mm in a single action. Anti-vibration system. Super fast, e.g. Geberit Mapress stainless steel Ø 108 mm in just 15 s. With automatic circuit control. Secure seating of adapter tongs by automatic locking.

Li-Ion 21.6 V, 5.0 Ah battery, for approx. 150 pressings Geberit Mapress stainless steel Ø 108.0 mm with one battery charge.

Pressing rings XL for all common systems

Full range of REMS pressing rings XL for driving by REMS Akku-Press XL 45 kN 22 V ACC (page 182–212). Highly durable pressing rings XL made of tenacious, specially hardened special steel. Pressing contours of REMS pressing rings XL are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing.

Adapter tongs Z7 XL 45 kN

For driving REMS pressing rings XL by REMS Akku-Press XL 45 kN 22 V ACC adapter tongs Z7 XL 45 kN are required.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit with battery only 6.5 kg. Long working stroke for pressings in a single action. Super fast, e.g. Geberit Mapress stainless steel Ø 108 mm in just 15 s. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing and soft grips. LED work light for illuminating the work place. Machine status check. Swivelling pressing ring seat, rotation angle > 360°. Secure seating of adapter tongs by automatic locking.

Anti-vibration system

Special drive technology with weight balancing and soft grips for low-vibration, fatigue-free pressing.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 45 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric dual-piston pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-Ion 22V Technology. Highly resistant Li-Ion 21.6V battery with 5.0 or 9.0Ah capacity, for long service life. Light and powerful. Li-Ion 21.6V, 5.0Ah batteries for approx. 150 pressings, 9.0Ah for approx. 270 pressings Geberit Mapress stainless steel Ø 108.0mm with one battery charge. Graduated charging state display with coloured LED. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger Li-Ion 100–240V, 90W. Rapid charger Li-Ion 100–240V, 290W, for shorter charging times, as accessory. 220–240V/21.6V, 40A voltage supply for mains operation instead of Li-Ion battery 21.6 V, as accessory.



Tested by electrosuisse >>

German Quality Product



Supply format

REMS Akku-Press XL 45 kN 22V ACC Basic-Pack Z7. Cordless radial press 45 kN with automatic circuit control for making press joints XL Ø 64–108 mm, Ø 2½–4". For driving REMS pressing rings XL. Swivelling pressing ring seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric dual-piston pump and compact high power hydraulic system. Anti-vibration system. Safety tip switch. LED work light. Battery Li-Ion 21.6 V, 5.0 Ah, rapid charger Li-Ion 100–240 V, 50–60 Hz, 90 W. Adapter tongs Z7 XL 45 kN. In XL-Boxx system case.

	Art.-No.	
	579014	

Other voltages on request.



Accessories

Description	Art.-No.	
REMS Akku-Press XL 45 kN 22V ACC drive unit, without battery	579001	
Adapter tongs Z7 XL 45 kN for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S), 2½–4" XL (PR-3B) with REMS Akku-Press XL 45 kN 22V ACC	579123	

REMS pressing rings XL see page 182–212

Battery Li-Ion 21.6 V, 5.0 Ah	571581	
Battery Li-Ion 21.6 V, 9.0 Ah	571583	
Rapid charger Li-Ion 100–240 V, 50–60 Hz, 90 W	571585	
Rapid charger Li-Ion 100–240 V, 50–60 Hz, 290 W	571587	
Voltage supply 220–240 V/21.6 V, 50–60 Hz, 40 A, for mains operation instead of battery Li-Ion 21.6 V	571578	
XL-Boxx system case with inserts	579601	



REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

for all common pressfitting systems

Select REMS pressing tongs/ REMS pressing rings yourself!

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the pressing tongs/pressing rings which are highlighted in yellow in the table.

Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result.

Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force or, if the system requires, by REMS Akku-Press XL 45 kN 22V ACC with 45 kN thrust force, see the table below. Adapter tongs (page 212) required for driving REMS (PR) pressing rings. All pressing tongs marked with * have an optional connection (Patent EP 1 223 008, Patent US 6,739,172) for manual drive through the radial press REMS Eco-Press. Read and observe the instructions for use and assembly instructions of the system provider/manufacturer.

REMS pressing tongs (PZ-2B)

REMS pressing tongs (PZ-2B) with 2 swivellable monoblock pressing jaws. Most sold standard version. REMS ACz, Fz, RFz, RFlz, VMPz pressing tongs with teeth prevent formation of burr on the pressfitting (Patent EP 2 027 971).

REMS pressing tongs (PZ-4G)

REMS pressing tongs (PZ-4G) with two pivoted, parallel aligned pressing segments for linear pressing of midsize dimensions.

REMS pressing tongs (PZ-S)

REMS pressing tongs (S) with one fixed and two pivoted pressing segments, for midsize dimensions. REMS VMPz pressing tongs with teeth prevent formation of burr on the pressfitting.

REMS pressing rings (PR-3S)

REMS pressing ring (PR-3S) with 3 pressing segments, 2 swivel guided, for large dimension complex pressings. Ideal pressing through radially controlled movement of pressing segments (Patent EP 2 080 592). Adapter tongs required, see page 212.

REMS pressing rings (PR-3B)

REMS pressing rings (PR-3B) with 3 pressing segments for high quality, large dimension pressings Optimum pressing by radially controlled movement of the pressing segments. Adapter tongs required, see page 212. REMS VAUFz, VFz, VMPz, VUSFz pressing rings with teeth prevent formation of burr on the pressfitting.

REMS pressing rings 45° (PR-2B)

REMS pressing ring 45° (PR-2B), with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access by 45° inclination (Patent EP 2 774 725). Adapter tongs required, see page 212.

Traceability according to EN 1775:2007

REMS pressing tongs/pressing rings with pressing contour F, M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs or the suitable pressing ring have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.

Confirmation of suitability

See page 213.

Hold-Harmless and Indemnification Agreement

See page 214.



Patent EP 1 223 008
Patent US 6,739,172



German Quality Product



REMS pressing tongs (PZ-2B)



REMS pressing tongs (PZ-4G)



REMS pressing tongs (PZ-S)



REMS pressing rings (PR-3S)




REMS pressing rings (PR-3B)



REMS pressing rings 45° (PR-2B)
Patent EP 2 774 725

REMS pressing tongs REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

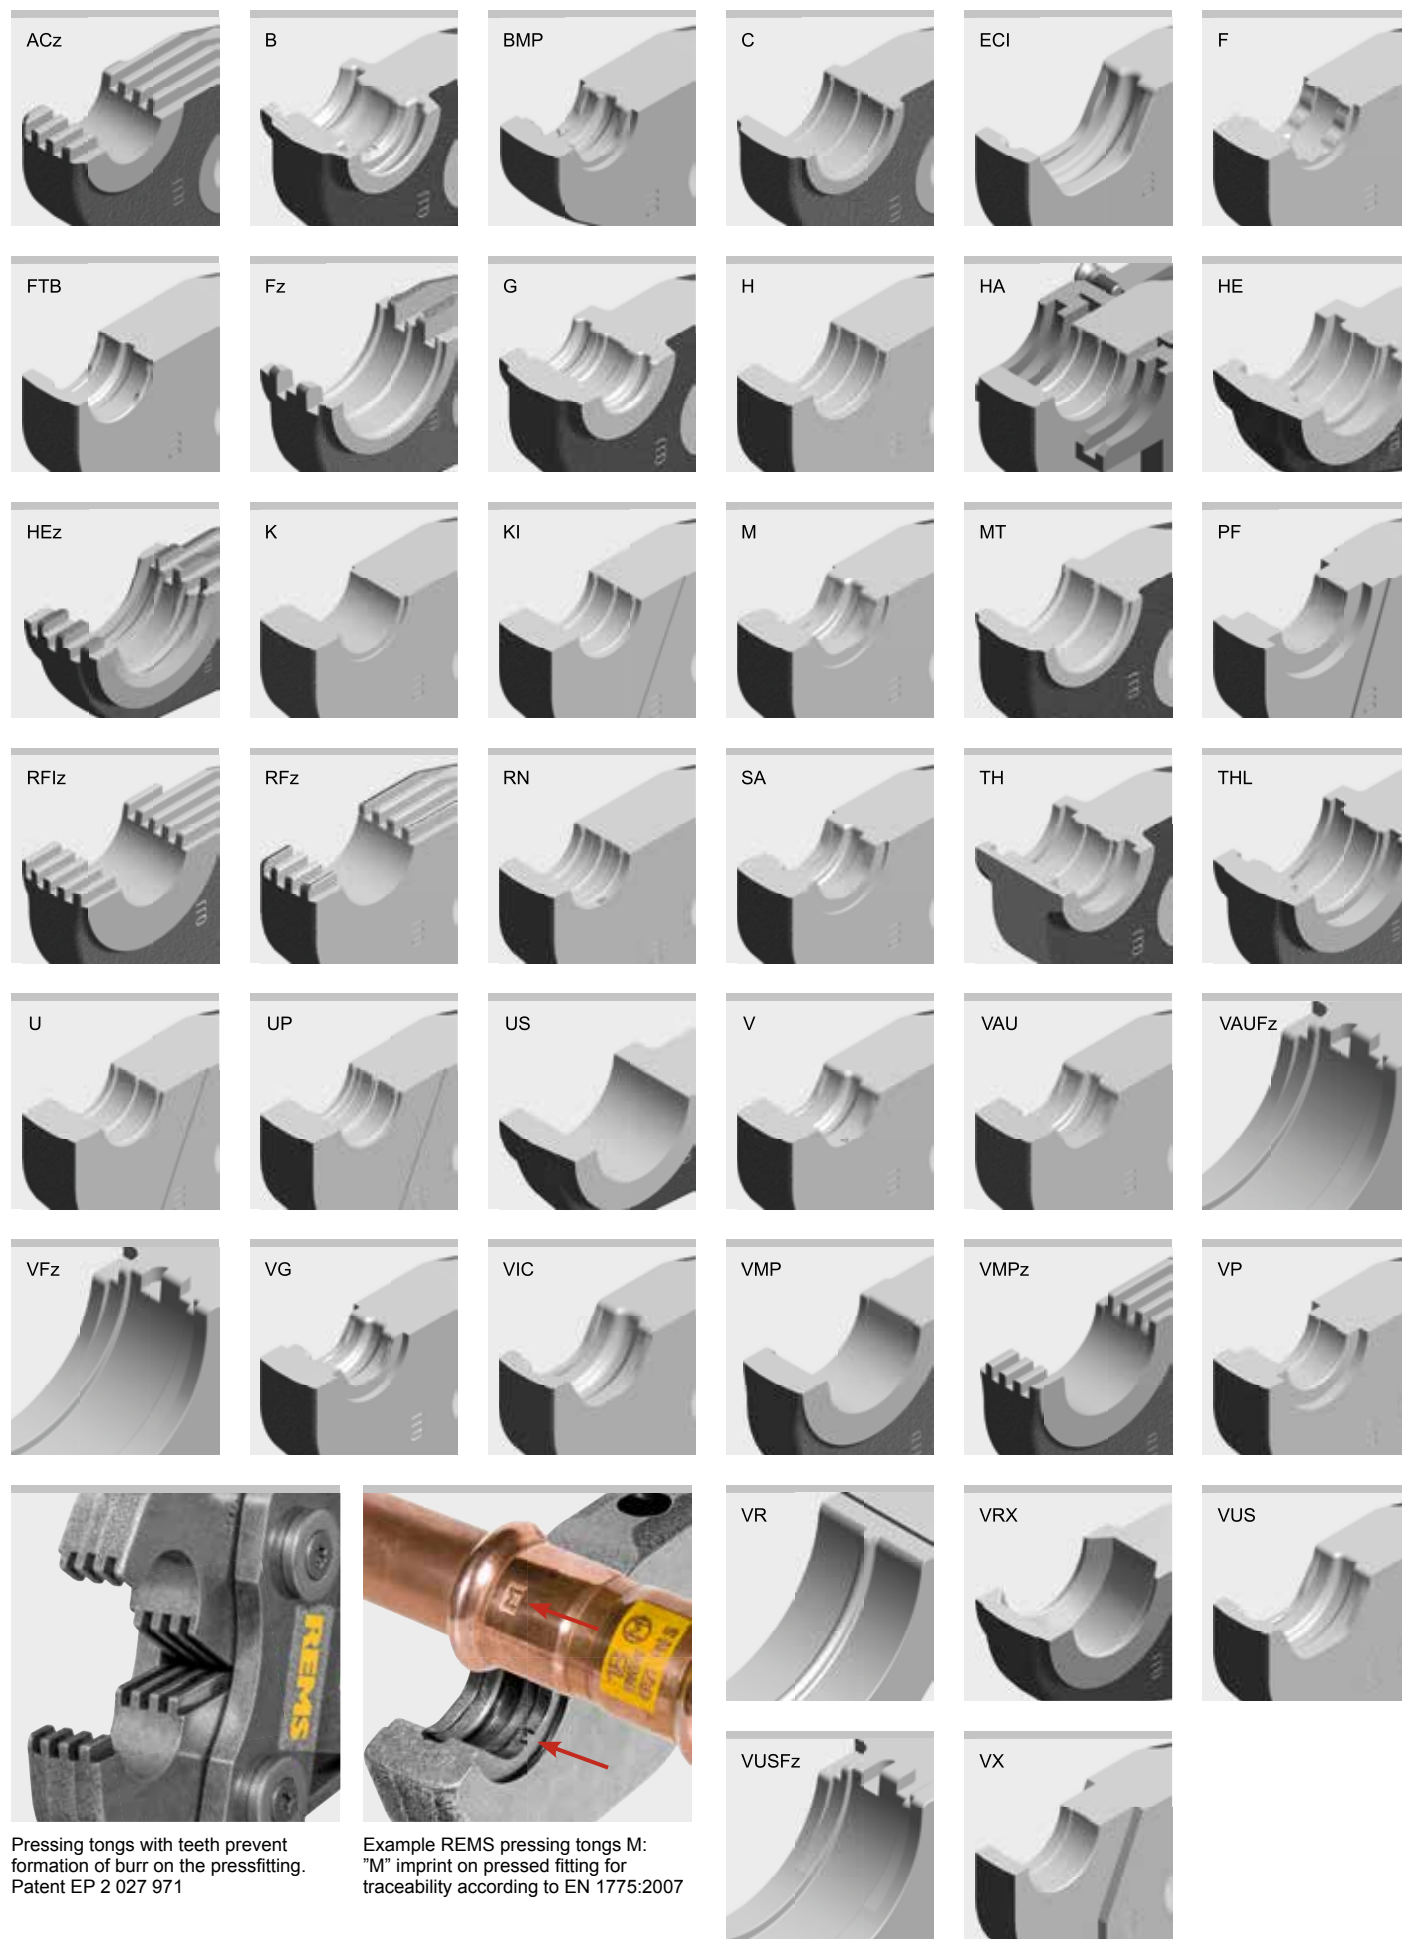

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
A			
AC-FIX PRESS (Global Piping Systems)	H 12*		570300
	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	VX 16*		571635
	VX 20*		571640
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
AC-FIX PRESS DUO (Global Piping Systems)	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	H 16*		570320
	H 18*		570340
	H 20*		570350
AC-FIX PRESS-MULTI (Global Piping Systems)	H 25*		570360
	H 32		570380
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	H 16*		570320
ACOME ACOPEX ALU	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 32		570785
	ACz 12*		572642
	ACz 16*		572644
ACOME MT	ACz 20*		572646
	ACz 25		572648
	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
AHLSELL A-press elförzinkad M	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
AHLSELL A-press elförzinkad V	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	M 12		570100
	M 15		570110
AHLSELL A-press koppar M	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
AHLSELL A-press koppar V	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
AHLSELL A-press koppar V	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
AHLSELL A-press rostfritt	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
AIRBEL PRESSCLIM	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
AIRBEL SERTINOX	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
ALB Sistema Multicapa	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
ALB Sistema Multicapa Gas	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	U 16*		570765
	U 18*		570770
	U 20*		570775
ALTECH Altech	C 26*		570750
	U 32		570785
	U 40		570790
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
APE MULTYGAS Serie AP Gas	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
APE Serie AP	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
APE Serie APL	H 16"		570320
	H 18"		570340
	H 20"		570350
	H 26"		570370
	H 32		570380
	TH 16"		570460
	TH 18"		570465
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
	U 16"		570765
	U 18"		570770
	U 20"		570775
AQUATECHNIK Press-fitting metal	H 16"		570320
	H 20"		570350
	H 32		570380
	TH 16"		570460
	TH 20"		570470
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16"		570765
	U 20"		570775
	U 32		570785
AQUATECHNIK Universal	H 16"		570320
	H 20"		570350
	H 26"		570370
	H 32		570380
	TH 16"		570460
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
	U 16"		570765
	U 20"		570775
	C 26"		570750
	U 32		570785
ARKA DUROsystem	H 16"		570320
	H 20"		570350
	H 25"		570360
	H 26"		570370
	H 32		570380
	TH 16"		570460
	TH 20"		570470
	TH 25"		570495
	TH 26"		570475
	TH 32		570480
	U 16"		570765
	U 20"		570775
Aschl NIR	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
ASSOTHERM IPC-RAC Carbon Steel	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
ASSOTHERM IPI-RAX Inox	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
ASSOTHERM IPI-RAX Inox Gas	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
ASSOTHERM IPM-Multistrato	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	H 16"		570320
	H 20"		570350
	H 26"		570370
	H 32		570380
	TH 16"		570460
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
	THL 32		570487
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16"		570765
	U 20"		570775
ASSOTHERM IPR-RRA Copper	C 26"		570750
	U 32		570785
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
ASSOTHERM IPR-RRA Copper Gas	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
ASTM F 1807 (Fittings with Copper Crimp Ring for PEX tubing)	US ¾"		571450
	US ½"		571455
	US ¾"		571460
	US 1"		571465
	US 1 ½"		571470
	US 1 ½"		571475
	US 2"		571477

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
AYOR FIXOCONNECT Press	H 12*		570300
	H 16*		570320
	H 20*		570350
	H 25*		570360
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	U 16*		570765
	U 20*		570775
	U 25*		570780
AYOR FIXOMULTIX	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
AYOR SOMATHERM FOR YOU -1	H 16*		570320
	H 20*		570350
	H 26*		570370
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	U 16*		570765
	U 20*		570775
AYOR SOMATHERM FOR YOU -2	H 12*		570300
	H 16*		570320
	H 20*		570350
	H 25*		570360
	RFz 12*		571320
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	U 16*		570765
	U 20*		570775
B			
Bampi BALPEX serie LP	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
Bampi BALPEX serie MP	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
Bampi BALPEX Gas	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	H 12*		570300
	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	RFz 12*		571320
BARBI EASYPRESS (Industrial Blansol)	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	H 14*		570310
	H 16*		570320
	H 18*		570340
BARBI MULTIPEX (Industrial Blansol)	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	RFz 16*		571325
	RFz 18*		571327
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
BEGETUBE/ IVAR	B 14*		570845
	B 16*		570850
	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880
	Fz 40		570742
	Fz 50		570747
	F 63 (PZ-S)		572385
	Fz 75 (PR-3B)	Z4	572830
	M 15		570110
	M 18		570120
Béné inox Série 41	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
BRASELI GPF GAS	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
BRASELI Pressfitting PE-X	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
BRASELI Pressfitting Multicapa	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
Brass Form Master Press	H 16*		570320
	H 18*		570340
	H 20*		570350
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	U 16*		570765
	U 18*		570770
	U 20*		570775
Brass & Fittings PRESSMAN MultiPress	RFz 16*		571325
	RFz 18*		571327
	ACz 20*		572646
	RFz 25		571335
	RFz 32		571340
Brass & Fittings PRESSMAN RetiPress	RFz 16*		571325
	RFz 18*		571327
	ACz 20*		572646
	RFz 25		571335
	RFz 32		571340
BRASSTECH MULTItermoSAN Brasspress	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
Cello Products >B< Press	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 18*		570770
	U 20*		570775
	C 26*		570750
	U 32		570785
	VUS ½" (OD 15,9 mm)		571770
	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1½" (OD 34,9 mm)		571785
	VUS 1¾" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
	H 16*		570320
	H 20*		570350
CGR DYNAFLU multicouche	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
C			

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
CGR DYNAFLU multicouche	H 12"		570300
	H 16"		570320
	H 20"		570350
	H 25"		570360
	RFz 12"		571320
	RFz 16"		571325
	RFz 20"		571330
CHIALI CHIALIPEX	RFz 25		571335
	TH 16"		570460
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
Climatek Clima Therm	TH 63 (PZ-S)		572405
	TH 14"		570455
	TH 16"		570460
	TH 18"		570465
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
Climatrix Climatrix Rhinopex	H 40 A (PZ-4G)		570695
	H 16"		570320
	H 20"		570350
	U 16"		570765
	U 20"		570775
	TH 14"		570455
	TH 16"		570460
ClouSet	TH 18"		570465
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
	TH 16"		570460
	TH 18"		570465
	TH 20"		570470
Comap PEX Press	RFz 12"		571320
	RFz 16"		571325
	RFz 20"		571330
	RFz 25		571335
	TH 14"		570455
	TH 16"		570460
	TH 18"		570465
Comap Multiskin	TH 20"		570470
	TH 26"		570475
	TH 32		570480
	THL 32		570487
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16"		570765
	U 20"		570775
	U 32		570785
	TH 16"		570460
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
	THL 32		570487
Comap Multiskin Gas	U 16"		570765
	U 20"		570775
	U 32		570785
	TH 14"		570455
	TH 16"		570460
	TH 18"		570465
	TH 20"		570470
	TH 25"		570495
	TH 26"		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	H 14"		570310
	H 16"		570320
COMISA Press System	H 18"		570340
	H 20"		570350
	H 26"		570370
	H 32		570380
	B 14"		570845
	B 16"		570850
	B 18"		570855
	B 20"		570860
	B 26		570870
	B 32		570880
	TH 16"		570460
	TH 20"		570470
	TH 26"		570475
	TH 32		570480

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
CONEL CONNECT MULTI	F 16"		570717
	F 20"		570727
	F 26"		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16"		570320
	H 20"		570350
	H 26"		570370
	H 32		570380
	TH 16"		570460
	TH 20"		570470
	TH 26"		570475
(DN 26)	TH 32		570480
	U 16"		570765
	U 20"		570775
	U 25"		570780
	U 32		570785
	VP 16"		570910
	VP 20"		570915
	VP 32		570925
CONEL CONNECT MV2	F 16"		570717
	F 20"		570727
	F 26"		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	TH 16"		570460
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
Conex Bänninger >B< Flex	F 16"		570717
	F 18"		570720
	F 20"		570727
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 32 45° (PR-2B)	Z1	574556
	H 16"		570320
	H 18"		570340
	H 20"		570350
	H 25"		570360
	H 32		570380
	RFz 16"		571325
	RFz 18"		571327
	RFz 20"		571330
Conex Bänninger >B< MaxiPro	RFz 25		571335
	RFz 32		571340
	TH 16"		570460
	TH 18"		570465
	TH 20"		570470
	TH 25"		570495
	TH 32		570480
	U 16"		570765
	U 18"		570770
	U 20"		570775
	U 25"		570780
	U 32		570785
	BMP ¼"		571700
	BMP ¾"		571702
	BMP ½"		571704
Conex Bänninger >B< Press	BMP ¾"		571706
	BMP ¾"		571708
	BMP ¾"		571710
	BMP 1"		571712
	BMP 1½"		571714
	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 14 45° (PR-2B)	Z1	574532
	V 15 45° (PR-2B)	Z1	574504
	V 16 45° (PR-2B)	Z1	574534
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Conex Bänninger >B< Press Carbon	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Conex Bänninger >B< Press Gas	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 14 45° (PR-2B)	Z1	574532
	V 15 45° (PR-2B)	Z1	574504
	V 16 45° (PR-2B)	Z1	574534
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Conex Bänninger >B< Press Inox	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Conex Bänninger >B< Press Solar	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 14 45° (PR-2B)	Z1	574532
	V 15 45° (PR-2B)	Z1	574504
	V 16 45° (PR-2B)	Z1	574534
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Conex Bänninger >B< Press XL carbon	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
Conex Bänninger >B< Press XL copper	VFz 64,0 (PR-3B)	Z5	572815
	VFz 76,1 (PR-3B) ⁶⁾	Z5	572816
	VFz 88,9 (PR-3B) ⁶⁾	Z5	572817
	VFz 108,0 (PR-3B) ⁶⁾	Z5	572818
Conex Bänninger >B< Press XL stainless	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
Conex Bänninger >B< Press XL red brass	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
D			
Debrunner Acifer d-a Presssystem C-Stahl	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
DIWAsystems	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
DUOFIL MKSYSTEM	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
DW Verbundrohr multitubo systems	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
E			
EBRILLE Isomonflex	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	H 26*		570370
	TH 26*		570475
	U 32		570785
EBRILLE Monflex	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	H 26*		570370
	TH 26*		570475
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
EFFEBI PRESSTIGE	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
EFFEBI TOF-GAS MULTIPINZA	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
EFFEBI TOF MULTIPINZA	H 40 (PZ-4G)		570390
	U 16*		570765
	U 20*		570775
	U 32		570785
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	F 16*		570717
	F 18*		570720
	F 20*		570727
	F 26*		570730
	F 32		570735
	Fz 40		570742
	Fz 50		570747
	F 63 (PZ-S)		572385
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	C 26*		570750
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	B 16*		570850
	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
EFIELD MULTILAYER PRESS DINGAS	U 16"		570765
	U 18"		570770
	U 20"		570775
	U 25"		570780
	U 32		570785
EFIELD MULTILAYER PRESS WATER	U 16"		570765
	U 18"		570770
	U 20"		570775
	U 25"		570780
	U 32		570785
Elkhart APOLLOXPRESS Fittings Copper and Low-Lead Brass	VUS ¾" (OD 15,9 mm)		571770
	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1½" (OD 34,9 mm)		571785
	VUS 1½" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
Elkhart APOLLOXPRESS LD-C Fittings Copper	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821
EMMETI GERPEX- FIVPRESS	B 16"		570850
	B 20"		570860
	B 26		570870
	B 32		570880
	H 16"		570320
	H 20"		570350
	TH 16"		570460
	TH 20"		570470
	TH 26"		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16"		570765
	U 20"		570775
EMPUR	TH 14"		570455
	TH 15"		570457
	TH 16"		570460
	TH 17"		570462
	TH 20"		570470
	TH 25"		570495
EURACCORDI SYCPRESS STAINLESS STEEL PRESS FITTINGS	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
EURACCORDI SYCPRESS CARBON STEEL PRESS FITTINGS	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
EUROTUBI EUROPA C-Steel Pressfitting System M-Profile ¹⁾	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
EUROTUBI	M 15		570110
EUROPA	M 18		570120
Inox Pressfitting	M 22		570130
System M-Profile ¹⁾	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Evans	VAU 15 (1½")		572687
Components	VAU 20 (¾")		572689
Presslok	VAU 25 (1")		572691
	ECI 1½"		571932
	ECI 2" (PZ-4G)		571934
	ECI 2½" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579104
	ECI 3" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579105
	ECI 4" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579106
F			
FAR Rubinetterie	TH 14"		570455
PRESSFAR	TH 16"		570460
	TH 17"		570462
	TH 18"		570465
	TH 20"		570470
	TH 25"		570495
	TH 26"		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	H 14"		570310
	H 16"		570320
	H 18"		570340
	H 20"		570350
	H 26"		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	U 14"		570760
	U 16"		570765
	U 18"		570770
	U 20"		570775
	U 25"		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
F.B.Q. BARONIO	V 12		570107
BQ press	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 14 45° (PR-2B)	Z1	574532
	V 15 45° (PR-2B)	Z1	574504
	V 16 45° (PR-2B)	Z1	574534
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
F.B.Q. BARONIO	V 15		570115
BQ press	V 18		570125
carbon steel	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45kN 22V ACC.

⁵⁾ For taking suitable pressing inserts.

^{b)} Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
F.B.Q. BARONIO BQ press gas	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
Fercofloor DUO Press FERCO PEX	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
Fercofloor DUO Press MULTIFER	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
FILINOX Filpress	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
FILINOX Instalpress Steel	U 50		570795
	U 63 (PZ-S)		572365
	FTB 15		571432
	FTB 18		571434
	FTB 22		571436
	FTB 28		571438
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579110
FILINOX Instalpress Inox	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579111
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579110
Fittings Estándar ECO-PRESS	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁽⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
Fittings Estándar MULTICAPA	RFz 16*		571325
	RFz 18*		571327
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
Fittings Estándar PE-X	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
FORNARA ForPress	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
FRABO FRABOPRESS 316 GAS M	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
FRABO FRABOPRESS 316 GAS V	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
FRABO FRABOPRESS 316 M	M 54 (PR-3S)	Z2	572708
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
FRABO FRABOPRESS 316 V	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	M 15		570110
	M 18		570120
FRABO FRABOPRESS 316 V	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 66,7 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579107
	M 76,1 XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ⁽³⁾ / Z7 XL 45 kN ⁽⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
FRABO FRABOPRESS CHROME	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
FRABO FRABOPRESS C-STEEL M	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
FRABO	V 12		570107
FRABOPRESS	V 15		570115
C-STEEL V	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
FRABO	M 12		570100
FRABOPRESS	M 15		570110
GAS M	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
FRABO	V 12		570107
FRABOPRESS	V 15		570115
GAS V	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
FRABO	V 12		570107
FRABOPRESS	V 15		570115
KOMBI	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
FRABO	M 12		570100
FRABOPRESS M	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
FRABO	V 15		570115
FRABOPRESS	V 18		570125
SOLAR	V 22		570135
	V 28		570145
	V 35		570155
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
FRABO	M 22		570130
FRABOPRESS TS	M 22 45° (PR-2B)	Z1	574526
	V 22		570135
	V 22 45° (PR-2B)	Z1	574508
FRABO	V 12		570107
FRABOPRESS V	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Fränkische	B 16*		570850
alpeX-duo	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 18*		570720
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
Fränkische	F 16*		570717
alpeX-duo XS	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
Fränkische	F 16*		570717
alpeX F50 PROFI	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
(DN 26)	U 25*		570780
	U 32		570785
	VP 16*		570910
	VP 20*		570915
	VP 32		570925
Fränkische	F 20 ²⁾		570727
alpeX-gas ²⁾	F 26 ²⁾		570730
	F 32 ²⁾		570735
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
Fränkische	Fz 40		570742
alpeX L	Fz 50		570747
	F 63 (PZ-S)		572385
	Fz 75 (PR-3B)	Z4	572830

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
G			
gabotherm H+S	TH 10"		570467
	TH 12"		570452
	TH 14"		570455
	TH 15"		570457
	TH 16"		570460
	TH 17"		570462
	TH 18"		570465
	TH 20"		570470
	TH 25"		570495
	TH 26"		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
Gallagher USA YogaPipe ACR	H 12" (1/4")		570300
	U 14" (3/4")		570760
	U 16" (1/2")		570765
	U 18" (3/4")		570770
	U 20" (3/4")		570775
	U 25" (3/4")		570780
	U 32 (1 1/4")		570785
Geberit Mapress C-STÄHL	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 66,7 XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579107
	M 76,1 XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Geberit Mapress Edelstahl	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Geberit Mapress Edelstahl Gas	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (P R-2B)	Z1	574530
Geberit Mapress Kupfer	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 66,7 XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579107
	M 76,1 XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL 3/ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
Geberit Mapress Kupfer Gas	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 35 (PR-3S)	Z2	572727
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Geberit Mepla	G 16*		570400
	G 20*		570410
	G 26*		570420
	G 32		570430
	G 40		570440
	G 50		570450
	G 63 (PZ-S)		572470
Geberit Mepla Therm	G 16*		570400
	G 20*		570410
	G 26*		570420
Geberit Volex	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
General Fittings 5T00	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
General Fittings Serie 5S00	U 32		570785
	B 16*		570850
	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 18*		570340
	H 20*		570350
General Fittings Trident	H 25*		570360
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
General Fittings Trident Gas	B 16*		570850
	F 16*		570717
	F 16 45° (PR-2B)	Z1	574550
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
Giacomini Raccordi RM Giacomini	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 32		570785
	TH 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
Giacomini RM MULTIGAS	TH 26*		570475
	TH 32		570480
	TH 40		570485
	U 16*		570765
	U 20*		570775
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	H 16*		570320

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Giacomini Valvole Giacomini serie R850V	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	SA 15		570935
	SA 18		570940
	SA 22		570945
	SA 28		570950
	SA 35		570955
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Golan Pipe Systems (Scandinavia) Alu-Press	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 75 (PR-3B)	Z4	572828
Grinnell G-PRESS Copper Fittings	VUS ½" (OD 15,9 mm)		571770
	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1½" (OD 34,9 mm)		571785
	VUS 1½" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821
GS Wärmesysteme System TH	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
GS Wärmesysteme System V	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
H			
HakaGerodur HAKASAN	TH 10*		570467
	TH 11,6*		570482
	TH 12*		570452
	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
HASTINIK Hastinik/Hitpress	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
heima24	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
HELIROMA Klimapress	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
HELIROMA romapress	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
HERZ PIPEFIX	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
Henco	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	HE 32		571900
	HEz 40		571904
Herotec TEMPUS-PRESS PLUS	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 75 (PR-3B)	Z4	572828
HERZ PIPEFIX	TH 10*		570467
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
HIDRONIX MULTIGAS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
HIDRONIX MULTIPIPE	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	C 26*		570750
	U 32		570785
HIDRONIX UNICO	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	C 26*		570750
	U 32		570785
HITEC Sistema Multistrato	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
hp praski BAVARIA-press	TH 10*		570467
	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
IBP >B< Flex	U 16*		570765
	U 25*		570780
	U 32		570785
IBP >B< Press	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 14 45° (PR-2B)	Z1	574532
	V 15 45° (PR-2B)	Z1	574504
	V 16 45° (PR-2B)	Z1	574534
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
IBP >B< Press Carbon	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
IBP >B< Press Gas	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
IBP >B< Press Inox	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
IBP >B< Press Solar	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
IBP >B< Press XL	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
ICMA Sempiter	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
ICMA Sempigas	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
Idrosanitaria Bonomi Homegas	TH 32		570480
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
Idrosanitaria Bonomi Idropress	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
IDROSISTEMI Ta-Press	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	Fz 40		570742
	Fz 50		570747
	F 63 (PZ-S)		572385
	H 16*		570320
	H 20*		570350
IDROTRADE Storm Multipinza	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	U 16*		570765
	U 20*		570775
	U 40		570790
	U 50		570795
IDROTRADE Storm Multistrato	H 14*		570310
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
IDROTRADE StormPRES	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
IDROTRADE StormSTEEL	M 54 (PR-3S)	Z2	572708
	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
ILTA INOX/CHIBRO Pressfitting Cuni	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
ILTA INOX/CHIBRO Pressfitting inox	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Instantor Press System	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
Instantor Copper Press Metric	M 15		570110
	M 22		570130
	M 28		570140
IPA IPANA Press	TH 10*		570467
	TH 11,6*		570482
	TH 12*		570452
	TH 14*		570455
	TH 15*		570457
	TH 16*		570460
IPA THu IPANA Press	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
	TH 22*		570472
	TH 25*		570495
	TH 26*		570475
IPALPEX (Industrie du Plastique et Accessoires)	TH 28		570477
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	K16/P18*		572600
	PF 22*		571980
IPLEX PIPELINES AUSTRALIA Iplex K1 (Gas)	K16/P18*		572600
	K/20*		572605
	K/25*		572610
	K32		572615
IPLEX PIPELINES AUSTRALIA Iplex K2	K1/40		572620
	K1/50		572625
ISOLTUBEX ISOLPEX IPERT	K16/P18*		572600
	K/20*		572605
	K/25*		572610
ISOLTUBEX Multicapa	RFz 16*		571325
	RFz 18*		571327
	RFz 20*		571330
	RFIz 25		571337
	RFIz 32		571342
ISOLTUBEX Multicapa GAS	RFz 16*		571325
	RFz 18*		571327
	RFz 20*		571330
	RFIz 25		571337
	RFIz 32		571342
ISOTUBI NUMEPRESS	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
IVAR ALPEX-GAS	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
IVAR Ivar-Press	RFz 16*		571325
	RFz 18*		571327
	RFz 20*		571330
	RFIz 25		571337
	RFIz 32		571342
IVAR MULTI PRESS GAS	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
IVAR MULTI PRESS GAS ITALIA	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
IVAR MULTI PRESS GAS	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
IVAR MULTI PRESS GAS	B 20		570860
	B 26		570870
	B 32		570880
IVAR MULTI PRESS GAS	B 14*		570845
	B 16*		570850
	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880
IVAR MULTI PRESS GAS	Fz 40		570742
	Fz 50		570747
	F 63 (PZ-S)		572385
IVAR MULTI PRESS GAS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	B 16*		570850
	B 20*		570860
IVAR MULTI PRESS GAS	B 26		570870
	B 32		570880
IVAR MULTI PRESS GAS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 16*		570320
	H 20*		570350
IVAR MULTI PRESS GAS	H 26*		570370
	H 32		570380
	U 16*		570765
	U 20*		570775
	U 32		570785

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
IVAR Multi Press MP	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	F 16*		570717
	F 18*		570720
	F 20*		570727
	F 26*		570730
	F 32		570735
	Fz 40		570742
	Fz 50		570747
	F 63 (PZ-S)		572385
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	C 26*		570750
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	B 16*		570850
	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880
IVAR Multi Press Leak (MPL)	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
IVAR Plastic Multi Press Leak (PMPL)	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
IVAR Plastic Multi Press PMP	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	U 16*		570765
	U 20*		570775
	U 25*		570780
	C 26*		570750
	U 32		570785
	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
IVT Edelstahl- Presssystem	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
IVT PRIPRESS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
J			
Jäger - Aquatec Aquadress H	H 14*		570310
	H 16*		570320
	H 17*		570330
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
Jäger - Aquatec C-Stahl - Press Typ M	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
Jäger - Aquatec Edelstahl - Press Typ M	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
Jäger - Aquatec Kupfer - Press Typ V	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Jäger - Aquatec JANSEN prima	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
Janssen AG JANSEN prima	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
Jaraflex- Presssystem	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
JUNGWOO JWPress	TH 63 (PZ-S)		572405
	VUS ½" (OD 15,9 mm)		571770
	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1¼" (OD 34,9 mm)		571785
	VUS 1½" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
K			
KAN KAN-therm Press	U 16* U 20* U 25* C 26* U 32 U 40 TH 50 (PZ-S) TH 63 (PZ-S)		570765 570775 570780 570750 570785 570790 572400 572405
KAN KAN-therm Press LBP	U 14* U 16* U 20* U 25* C 26* U 32 U 40 TH 14* TH 16* TH 20* TH 25* TH 26* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S)		570760 570765 570775 570780 570750 570785 570790 570455 570460 570470 570495 570475 570480 570485 572400 572405
KAN KAN-therm Inox	M 12 M 15 M 18 ¹⁾ M 22 M 28 ¹⁾ M 35 M 42 (PZ-4G) M 54 (PZ-4G) M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 12 45° (PR-2B) M 15 45° (PR-2B) M 18 45° (PR-2B) M 22 45° (PR-2B) M 28 45° (PR-2B) M 35 45° (PR-2B)		570100 570110 570120 570130 570140 570150 570160 570170 572706 572708 579101 579110 579111 574520 574522 574524 574526 574528 574530
KAN KAN-therm Steel	M 12 M 15 M 18 ¹⁾ M 22 M 28 ¹⁾ M 35 M 42 (PZ-4G) M 54 (PZ-4G) M 42 (PR-3S) M 54 (PR-3S) XP 66,7 XL (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 12 45° (PR-2B) M 15 45° (PR-2B) M 18 45° (PR-2B) M 22 45° (PR-2B) M 28 45° (PR-2B) M 35 45° (PR-2B)		570100 570110 570120 570130 570140 570150 570160 570170 572706 572708 579108 579101 579110 579111 574520 574522 574524 574526 574528 574530
KE KELIT KELIT KELOX	U 16* U 18* U 20* U 25* U 32 U 40 U 50 U 63 (PZ-S) U 63 (PR-3B) U 75 (PR-3B)		570765 570770 570775 570780 570785 570790 570795 572365 572837 572828
KE KELIT COPPERFIX Kupfer	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 15 45° (PR-2B) M 18 45° (PR-2B) M 22 45° (PR-2B) M 28 45° (PR-2B) M 35 45° (PR-2B)		570110 570120 570130 570140 570150 572706 572708 579101 579110 579111 574522 574524 574526 574528 574530

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
KE KELIT steelFIX C-Stahl	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 15 45° (PR-2B) M 18 45° (PR-2B) M 22 45° (PR-2B) M 28 45° (PR-2B) M 35 45° (PR-2B)		570110 570120 570130 570140 570150 572706 572708 579101 579110 579111 574522 574524 574526 574528 574530
KE KELIT steelFIX Edelstahl	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 15 45° (PR-2B) M 18 45° (PR-2B) M 22 45° (PR-2B) M 28 45° (PR-2B) M 35 45° (PR-2B)		570110 570120 570130 570140 570150 572706 572708 579101 579110 579111 574522 574524 574526 574528 574530
KEMBLA KemPress (AUS)	VAU 15 (OD 12,7 mm) VAU 20 (OD 19,1 mm) VAU 25 (OD 25,4 mm) VAU 32 (OD 31,8 mm) VAU 40 (OD 38,1 mm) VAU 50 (OD 50,8 mm)		572687 572689 572691 572693 572695 572697
KEMBLA KemPress Gas (AUS)	VAU 15 (OD 12,7 mm) VAU 20 (OD 19,1 mm) VAU 25 (OD 25,4 mm) VAU 32 (OD 31,8 mm) VAU 40 (OD 38,1 mm) VAU 50 (OD 50,8 mm)		572687 572689 572691 572693 572695 572697
KISAN Kisan KD	KI 16* KI 20* KI 25* TH 16* TH 20* TH 25*		571360 571370 571375 570460 570470 570495
KISAN Kisan WL	KI 16* KI 20* KI 25* KI 32 TH 16* TH 20* TH 25* TH 32		571360 571370 571375 571380 570460 570470 570495 570480
KISAN Kisan WM	KI 16* KI 20* KI 25* KI 32		571360 571370 571375 571380
KISAN Kisan WR	U 20* U 25* U 32 U 40 U 50 U 63 (PZ-S) U 75 (PR-3B) TH 20* TH 25* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S)		570775 570780 570785 570790 570795 572365 572828 570470 570495 570480 570485 572400 572405
KISAN Kistal C	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 15 45° (PR-2B) M 18 45° (PR-2B) M 22 45° (PR-2B) M 28 45° (PR-2B) M 35 45° (PR-2B)		570110 570120 570130 570140 570150 572706 572708 579101 579110 579111 574522 574524 574526 574528 574530

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
KISAN Kistal Inox	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
KME cuprotherm CTX	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
KME Q-Tec - Comap SkinPress	TH 20*		570470
	TH 26*		570475
	H 16 A*		570620
	H 20 A*		570650
KME Q-Tec - Oventrop Cofit	H 26 A*		570670
L			
LEGEND-PRESS press fitting system	VUS ½" (OD 15,9 mm)		571770
	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1¼" (OD 34,9 mm)		571785
	VUS 1½" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821
LK Systems LK >B<Press	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
LK Systems LK >B<Press Elförzinkat	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
LK Systems LK >B<Press Gas	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
LK Systems LK Universal	V 35 45° (PR-2B)	Z1	574512
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
LVI-DAHL Altech-Alupex	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
M			
MAINCOR MAINPRESS	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
MAINCOR MAINFLOR	U 16*		570765
	U 20*		570775

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Mair Heiztechnik M-Press	H 11,5*		570315
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
Ma.s.ter System PRESSMASTER	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
Meier Tobler Metalplast - Stramax	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
METALGRUP Permatubo	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
	U 16*		570765
	U 18*		570770
METALGRUP PexGrup	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
METALGRUP MultiGrup	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
Mueller Industries Streamline PRS	RFz 32		571340
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
MULTITHERM PRESSSYSTEM	U 32		570785
	VUS ½" (OD 15,9 mm)		571770
	VUS ¾" (OD 22,2 mm)		571775
	VUS 1" (OD 28,6 mm)		571780
	VUS 1¼" (OD 34,9 mm)		571785
	VUS 1½" (OD 41,3 mm)		571790
	VUS 2" (OD 54,0 mm)		571795
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820
Multicapas Industrial AIS PEX	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
Multicapas Industrial multitubo systems MC	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 16*		570765
	U 18*		570770
	U 20*		570775
Multicapas Industrial multitubo systems MC	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 75 (PR-3B)	Z4	572828

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Multicap Industrial multitubo systems MM	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
	U 63 (PR-3B)	Z4	572837
	U 75 (PR-3B)	Z4	572828
N			
NEUTHERM MEKUPRESS-HT	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 40 (PZ-4G)		570390
NIBCO (USA) Press System Copper	U 40		570790
	VUS ½" (OD 15,9mm)		571770
	VUS ¾" (OD 22,2mm)		571775
	VUS 1" (OD 28,6mm)		571780
	VUS 1½" (OD 34,9mm)		571785
	VUS 1¾" (OD 41,3mm)		571790
Nicolli Fluxo	VUS 2" (OD 54,0mm)		571795
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
NUPI Industrie Italiane Multinupi	B 16*		570850
	B 18*		570855
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 18*		570720
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 25*		570360
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 25*		570495
	TH 26*		570475
	TH 32		570480
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	C 26*		570750
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Nussbaum Optifitt-Press	VMP ¾" (OD 17,2 mm)		571740
	VMP ½" (OD 21,3 mm)		571762
	VMPz ¼" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1½" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Nussbaum Optiflex-Flowpress	VRX 16		571750
	VRX 20		571752
	VRX 25		571754
	VRX 32		571756
	VRX 40		571758
	VRX 50		571760
	VRX 63		571797
Nussbaum Optipress Aquaplus	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B)	Z5	572815
	VFz 76,1 (PR-3B)	Z5	572816
	VFz 88,9 (PR-3B)	Z5	572817
	VFz 108,0 (PR-3B)	Z5	572818
	V 15 45° (PR-2B)	Z1	574504
Nussbaum Optipress-Gaz	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B)	Z5	572815
Nussbaum Optipress-Therm	VFz 76,1 (PR-3B)	Z5	572816
	VFz 88,9 (PR-3B)	Z5	572817
	VFz 108,0 (PR-3B)	Z5	572818
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B)	Z5	572815
	VFz 76,1 (PR-3B)	Z5	572816
	VFz 88,9 (PR-3B)	Z5	572817
	VFz 108,0 (PR-3B)	Z5	572818
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
O			
O.M.T. - Press	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
Oventrop Cofit P	H 16 A*		570620
	H 20 A*		570650
	H 26 A*		570670
	H 32 A		570680
	H 40 A		570690
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
Oventrop Cofit PD	H 16 A*		570620
	H 20 A*		570650
	H 26 A*		570670

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Oventrop	H 16 A*		570620
Cofit PDK	H 20 A*		570650
Oventrop	H 16 A*		570620
Cofit PD-HT	H 20 A*		570650
	H 25 A*		570660
	H 32 A		570680
Oventrop	H 16 A*		570620
Cofit PDK-HT	H 20 A*		570650
P			
PBTub	RFz 12*		571320
SERTIPRESS	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
PBTub	M 15		570110
SERTI-STEEL	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Pegler Yorkshire	M 12		570100
XPress Carbon	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Pegler Yorkshire	M 12		570100
XPress Copper	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Pegler Yorkshire	M 15		570110
XPress Copper	M 18 ¹⁾		570120
Gas	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
Pegler Yorkshire	M 15		570110
XPress	M 18 ¹⁾		570120
Stainless	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Pegler Yorkshire	M 15		570110
XPress Stainless	M 18 ¹⁾		570120
Gas	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
PERFEXIM	U 16*		570765
PERFEKT	U 20*		570775
SYSTEM	U 25*		570780
	U 32		570785
PERFILTUBO	U 16*		570765
PERFILALUPEX	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
PERFILTUBO	M 15		570110
PERFILPRESS	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
PEXTUBE	RFz 16*		571325
PexTube	RFz 20*		571330
	RFIz 25		571337
	RFIz 32		571342
Pipelife	M 15		570110
C-PRESS	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Pipelife	TH 16*		570460
RADOPRESS	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
Pipetec Connect	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
PLASTICA ALFA	TH 16*		570460
Multipex	TH 20*		570470
	TH 26*		570475
	TH 32		570480
PLASTICA ALFA	TH 16*		570460
Multipex Air	TH 20*		570470
	TH 26*		570475
	TH 32		570480
PLASTICA ALFA	TH 16*		570460
Multipexalfa Gas	TH 20*		570470
	TH 26*		570475
PLASTICA ALFA	TH 16*		570460
Multipexalfa Gas protek	TH 20*		570470
	TH 26*		570475
PLASTICA ALFA	TH 16*		570460
Multipex Plus	TH 20*		570470
	TH 26*		570475
	TH 32		570480
PLASTICA ALFA	TH 16*		570460
Multipex Thermo	TH 20*		570470
	TH 26*		570475
	TH 32		570480
PLASTICA ALFA	TH 16*		570460
Multipex Thermo Plus	TH 20*		570470
	TH 26*		570475
	TH 32		570480
PLÁSTICOS	U 16*		570765
FERRO	U 20*		570775
FERROPLAST	U 25*		570780
GF MC PRESS	U 32		570785
Pressfitting MULTICAPA			
PLÁSTICOS	U 16*		570765
FERRO	U 20*		570775
FERROPLAST	U 25*		570780
GF PPSU	U 32		570785
Pressfitting PE-X y MULTICAPA			
PLÁSTICOS	RFz 16*		571325
FERRO	RFz 20*		571330
FERROPLAST	RFz 25		571335
GF PRESS	RFz 32		571340
Pressfitting PE-X			
PLUMBING PLUS	K16/P18*		572600
EZIPEX Crimp (AUS)	K/20*		572605
	K/25*		572610
	K32		572615
	K1/40		572620
	K1/50		572625
PLUMBING PLUS	K16/P18*		572600
EZIPEX Gas (AUS)	K/20*		572605
	K/25*		572610
	K32		572615
	K1/40		572620
	K1/50		572625
PLUMBING PLUS	VAU 15 (OD 12,7 mm)		572687
EZIPRESS Gas (AUS)	VAU 20 (OD 19,1 mm)		572689
	VAU 25 (OD 25,4 mm)		572691
	VAU 32 (OD 31,8 mm)		572693
	VAU 40 (OD 38,1 mm)		572695
	VAU 50 (OD 50,8 mm)		572697
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841
	VAU 15 45° (PR-2B) (OD 12,7 mm)	Z1	574540
	VAU 20 45° (PR-2B) (OD 19,1 mm)	Z1	574542
	VAU 25 45° (PR-2B) (OD 25,4 mm)	Z1	574544

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
PLUMBING PLUS EZIPRESS Solar (AUS)	VAU 15 (OD 12,7 mm)		572687
	VAU 20 (OD 19,1 mm)		572689
	VAU 25 (OD 25,4 mm)		572691
	VAU 15 45° (PR-2B) (OD 12,7 mm)	Z1	574540
	VAU 20 45° (PR-2B) (OD 19,1 mm)	Z1	574542
PLUMBING PLUS EZIPRESS Water (AUS)	VAU 25 45° (PR-2B) (OD 25,4 mm)	Z1	574544
	VAU 15 (OD 12,7 mm)		572687
	VAU 20 (OD 19,1 mm)		572689
	VAU 25 (OD 25,4 mm)		572691
	VAU 32 (OD 31,8 mm)		572693
	VAU 40 (OD 38,1 mm)		572695
	VAU 50 (OD 50,8 mm)		572697
	VAUFz 65 (PR-3B)		572839
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841
	VAU 15 45° (PR-2B) (OD 12,7 mm)	Z1	574540
	VAU 20 45° (PR-2B) (OD 19,1 mm)	Z1	574542
	VAU 25 45° (PR-2B) (OD 25,4 mm)	Z1	574544
POLYPIPE POLYSURE	TH 10*		570467
	TH 15*		570457
	TH 22*		570472
	TH 28		570477
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
POLYSAN- C-Stahl-Press- System M	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
POLYSAN- Edelstahl Press-System 1.4520	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
POLYSAN- Edelstahl Press-System Gas	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S) ⁷⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S) ⁷⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
POLYSAN- Edelstahl Press-System Wasser	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
POLYSAN- Press-System	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
POLYSAN-Henco- Press-System	TH 26*		570475
	HE 32		571900
	HEz 40		571904
POLYSAN (España) „Rainbow“	U 16*		570765
	U 18*		570770
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
Prandelli Multyrama Pf	H 14*		570310
	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
Prandelli Multyrama Pfm	H 16*		570320
	H 18*		570340
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	U 16*		570765
	U 18*		570770
	U 20*		570775
PURMO Cleverfit Radial	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich)	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 26*		570475
POLYSAN- Edelstahl Press-System Wasser	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 20*		570775
	U 32		570785
	VP 16*		570910
	VP 20*		570915
	VP 25		570920

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

1) Only pressing tongs from designation “108” (1st quarter of 2008), “208” (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

2) For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

3) Driven by REMS Power-Press XL ACC.

4) Driven by REMS Akku-Press XL 45 kN 22 V ACC.

5) For taking suitable pressing inserts.

6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

7) Use pressing rings labelled “M 88.9 G” or “M 108 G” on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

[illegible]

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	
RIFENG TH PRESS FITTING (F9)	TH 16*		570460	
	TH 20*		570470	
	TH 25*		570495	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
RIQUIER A SERTIR	RFz 12*		571320	
	RFz 16*		571325	
	RFz 20*		571330	
	RFz 25		571335	
Roth PressCheck	RN 14*		572672	
	RN 16		572670	
	RN 17*		572674	
	RN 20*		572676	
	RN 25/26		572678	
	RN 32		572680	
	RN 40 (PR-3S)	Z2	572714	
	RN 50 (PR-3S)	Z2	572716	
RNz 63 (PR-3B)	Z4	572836		
Roth Ibérica Rothapress	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 25*		570495	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
Rubinetterie	M 15		570110	
Bresciane	M 18		570120	
Bonomi	M 22		570130	
TURBO INOX	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 45° (PR-2B)	Z1	574522	
	M 18 45° (PR-2B)	Z1	574524	
	M 22 45° (PR-2B)	Z1	574526	
	M 28 45° (PR-2B)	Z1	574528	
	M 35 45° (PR-2B)	Z1	574530	
	Rubinetterie	M 15		570110
	Bresciane	M 18		570120
	Bonomi	M 22		570130
TURBO INOX GAS	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 15 45° (PR-2B)	Z1	574522	
	M 18 45° (PR-2B)	Z1	574524	
	M 22 45° (PR-2B)	Z1	574526	
	M 28 45° (PR-2B)	Z1	574528	
	M 35 45° (PR-2B)	Z1	574530	
Rubinetterie	TH 16*		570460	
Bresciane	TH 20*		570470	
Bonomi	TH 26*		570475	
TURBO PRESS GAS	TH 32		570480	
Rubinetterie	M 15		570110	
Bresciane	M 18		570120	
Bonomi	M 22		570130	
TURBO STEEL	M 28		570140	
	M 35		570150	
	M 42 (PR-3S)	Z2	572706	
	M 54 (PR-3S)	Z2	572708	
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101	
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110	
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111	
	M 15 45° (PR-2B)	Z1	574522	
	M 18 45° (PR-2B)	Z1	574524	
	M 22 45° (PR-2B)	Z1	574526	
	M 28 45° (PR-2B)	Z1	574528	
	M 35 45° (PR-2B)	Z1	574530	
	Rubinetterie	TH 14*		570455
	Bresciane	TH 16*		570460
	Bonomi	TH 18*		570465
TURBO PRESS	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
	Rubinetterie	TH 16*		570460
	Bresciane	TH 20*		570470
Bonomi	TH 26*		570475	
TURBO PRESS GAS	TH 32		570480	
S				
Sa.MI plastic	TH 14*		570455	
	TH 16*		570460	
	TH 18*		570465	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	
	TH 40		570485	
	TH 50 (PZ-S)		572400	
	TH 63 (PZ-S)		572405	
Sa.MI plastic Multistrato Gas	TH 16*		570460	
	TH 20*		570470	
	TH 26*		570475	
	TH 32		570480	

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SANHA 3fit-Press Pb-free Serie 25000	B 16*		570850	SANHA-NiroSan Industry Presssystem Serie 18000	SA 15		570935
	B 20*		570860		SA 18		570940
	B 26		570870		SA 22		570945
	B 32		570880		SA 28		570950
	F 16*		570717		SA 35		570955
	F 20*		570727		M 15		570110
	F 26*		570730		M 18		570120
	F 32		570735		M 22		570130
	Fz 40		570742		M 28		570140
	Fz 50		570747		M 35		570150
	F 63 (PZ-S)		572385		M 42 (PR-3S)	Z2	572706
	F 16 45° (PR-2B)	Z1	574550		M 54 (PR-3S)	Z2	572708
	F 20 45° (PR-2B)	Z1	574552		XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	F 26 45° (PR-2B)	Z1	574554		M 15 45° (PR-2B)	Z1	574522
	F 32 45° (PR-2B)	Z1	574556		M 18 45° (PR-2B)	Z1	574524
	H 16*		570320		M 22 45° (PR-2B)	Z1	574526
	H 20*		570350		M 28 45° (PR-2B)	Z1	574528
	H 26*		570370		M 35 45° (PR-2B)	Z1	574530
	H 32		570380		V 15		570115
	H 40 (PZ-4G)		570390		V 18		570125
	TH 16*		570460		V 22		570135
	TH 20*		570470		V 28		570145
	TH 26*		570475		V 35		570155
	TH 32		570480		V 42		570165
	TH 40		570485		V 54		570175
	TH 50 (PZ-S)		572400		V 15 45° (PR-2B)	Z1	574504
	TH 63 (PZ-S)		572405		V 18 45° (PR-2B)	Z1	574506
	U 16*		570765		V 22 45° (PR-2B)	Z1	574508
	U 20*		570775		V 28 45° (PR-2B)	Z1	574510
	C 26*		570750		V 35 45° (PR-2B)	Z1	574512
	U 32		570785	SANHA-NiroSan- Presssystem Serie 9000	SA 15		570935
	U 40		570790		SA 18		570940
	U 50		570795		SA 22		570945
	U 63 (PR-3B)	Z4	572837		SA 28		570950
	U 63 (PZ-S)		572365		SA 35		570955
SANHA 3fit-Press PPSU Serie 35000	B 16*		570850		M 15		570110
	B 20*		570860		M 18		570120
	B 26		570870		M 22		570130
	B 32		570880		M 28		570140
	F 16*		570717		M 35		570150
	F 20*		570727		M 42 (PR-3S)	Z2	572706
	F 26*		570730		M 54 (PR-3S)	Z2	572708
	F 32		570735		XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	F 16 45° (PR-2B)	Z1	574550		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	F 20 45° (PR-2B)	Z1	574552		M 15 45° (PR-2B)	Z1	574522
	F 26 45° (PR-2B)	Z1	574554		M 18 45° (PR-2B)	Z1	574524
	F 32 45° (PR-2B)	Z1	574556		M 22 45° (PR-2B)	Z1	574526
	H 16*		570320		M 28 45° (PR-2B)	Z1	574528
	H 20*		570350		M 35 45° (PR-2B)	Z1	574530
	H 26*		570370		V 15		570115
	H 32		570380		V 18		570125
	TH 16*		570460		V 22		570135
	TH 20*		570470		V 28		570145
	TH 26*		570475		V 35		570155
	TH 32		570480		V 42		570165
	TH 40		570485		V 54		570175
	TH 50 (PZ-S)		572400		V 15 45° (PR-2B)	Z1	574504
	TH 63 (PZ-S)		572405		V 18 45° (PR-2B)	Z1	574506
	U 16*		570765		V 22 45° (PR-2B)	Z1	574508
	U 20*		570775		V 28 45° (PR-2B)	Z1	574510
	C 26*		570750		V 35 45° (PR-2B)	Z1	574512
	U 32		570785	SANHA-NiroSan SF Presssystem Serie 19000 (silicone free)	SA 15		570935
SANHA-NiroSan Gas Presssystem Serie 17000	SA 15		570935		SA 18		570940
	SA 18		570940		SA 22		570945
	SA 22		570945		SA 28		570950
	SA 28		570950		SA 35		570955
	SA 35		570955		M 15		570110
	M 15		570110		M 18		570120
	M 18		570120		M 22		570130
	M 22		570130		M 28		570140
	M 28		570140		M 35		570150
	M 35		570150		M 42 (PR-3S)	Z2	572706
	M 42 (PR-3S)	Z2	572706		M 54 (PR-3S)	Z2	572708
	M 54 (PR-3S)	Z2	572708		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522		M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524		M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526		M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528		M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530		M 35 45° (PR-2B)	Z1	574530
	V 15		570115		V 15		570115
	V 18		570125		V 18		570125
	V 22		570135		V 22		570135
	V 28		570145		V 28		570145
	V 35		570155		V 35		570155
	V 42		570165		V 42		570165
	V 54		570175		V 54		570175
	V 15 45° (PR-2B)	Z1	574504		V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506		V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508		V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510		V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512		V 35 45° (PR-2B)	Z1	574512

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SANHA NiroTherm Serie 91000	SA 15		570935
	SA 18		570940
	SA 22		570945
	SA 28		570950
	SA 35		570955
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
SANHA NiroTherm Industry Serie 98000	SA 15		570935
	SA 18		570940
	SA 22		570945
	SA 28		570950
	SA 35		570955
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
SANHA-Press Chrom Serie 16000	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	SA 12		570930
	SA 15		570935
	SA 18		570940
	SA 22		570945
	SA 28		570950
	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000	SA 12		570930
	SA 14		570932
	SA 15		570935
	SA 16		570937
	SA 18		570940
	SA 22		570945
	SA 28		570950
	SA 35		570955
	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 12		570107
	V 14		570112
	VG 14		570132
	V 15		570115
	V 16		570117
	VG 16		570137
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	VG 14 45° (PR-2B)	Z1	574536
	V 15 45° (PR-2B)	Z1	574504
	VG 16 45° (PR-2B)	Z1	574538
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
SANHA-Press Pressfittings Serie 6000	SA 12		570930
	SA 14		570932
	SA 15		570935
	SA 16		570937
	SA 18		570940
	SA 22		570945
	SA 28		570950
	SA 35		570955
	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 12		570107
	V 14		570112
	VG 14		570132
	V 15		570115
	V 16		570117
	VG 16		570137
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	VG 14 45° (PR-2B)	Z1	574536
	V 15 45° (PR-2B)	Z1	574504
	VG 16 45° (PR-2B)	Z1	574538
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.	System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12		570930	SANHA-Therm Serie 24000	SA 12		570930
	SA 15		570935		SA 15		570935
	SA 18		570940		SA 18		570940
	SA 22		570945		SA 22		570945
	SA 28		570950		SA 28		570950
	SA 35		570955		SA 35		570955
	M 12		570100		M 12		570100
	M 15		570110		M 15		570110
	M 18		570120		M 18		570120
	M 22		570130		M 22		570130
	M 28		570140		M 28		570140
	M 35		570150		M 35		570150
	M 42 (PR-3S)	Z2	572706		M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708		M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100		XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108		M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101		M 12 45° (PR-2B)	Z1	574520
	M 12 45° (PR-2B)	Z1	574520		M 15 45° (PR-2B)	Z1	574522
	M 15 45° (PR-2B)	Z1	574522		M 18 45° (PR-2B)	Z1	574524
	M 18 45° (PR-2B)	Z1	574524		M 22 45° (PR-2B)	Z1	574526
	M 22 45° (PR-2B)	Z1	574526		M 28 45° (PR-2B)	Z1	574528
	M 28 45° (PR-2B)	Z1	574528		M 35 45° (PR-2B)	Z1	574530
	M 35 45° (PR-2B)	Z1	574530		V 12		570107
	V 12		570107		V 15		570115
	V 15		570115		V 18		570125
	V 18		570125		V 22		570135
	V 22		570135		V 28		570145
	V 28		570145		V 35		570155
	V 35		570155		V 42		570165
	V 42		570165		V 54		570175
	V 54		570175		V 12 45° (PR-2B)	Z1	574502
	V 12 45° (PR-2B)	Z1	574502		V 15 45° (PR-2B)	Z1	574504
	V 15 45° (PR-2B)	Z1	574504		V 18 45° (PR-2B)	Z1	574506
	V 18 45° (PR-2B)	Z1	574506		V 22 45° (PR-2B)	Z1	574508
	V 22 45° (PR-2B)	Z1	574508		V 28 45° (PR-2B)	Z1	574510
	V 28 45° (PR-2B)	Z1	574510		V 35 45° (PR-2B)	Z1	574512
	V 35 45° (PR-2B)	Z1	574512	SANHA-Therm Industry Serie 28000	SA 12		570930
SANHA PURAPRESS Serie 8000	SA 12		570930		SA 15		570935
	SA 14		570932		SA 18		570940
	SA 15		570935		SA 22		570945
	SA 16		570937		SA 28		570950
	SA 18		570940		SA 35		570955
	SA 22		570945		M 12		570100
	SA 28		570950		M 15		570110
	SA 35		570955		M 18		570120
	M 12		570100		M 22		570130
	M 15 ¹⁾		570110		M 28		570140
	M 18 ¹⁾		570120		M 35		570150
	M 22 ¹⁾		570130		M 42 (PR-3S)	Z2	572706
	M 28 ¹⁾		570140		M 54 (PR-3S)	Z2	572708
	M 35 ¹⁾		570150		XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 42 (PR-3S)	Z2	572706		M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107
	M 54 (PR-3S)	Z2	572708		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100		M 12 45° (PR-2B)	Z1	574520
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108		M 15 45° (PR-2B)	Z1	574522
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107		M 18 45° (PR-2B)	Z1	574524
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101		M 22 45° (PR-2B)	Z1	574526
	M 12 45° (PR-2B)	Z1	574520		M 28 45° (PR-2B)	Z1	574528
	M 15 45° (PR-2B)	Z1	574522		M 35 45° (PR-2B)	Z1	574530
	M 18 45° (PR-2B)	Z1	574524		V 12		570107
	M 22 45° (PR-2B)	Z1	574526		V 15		570115
	M 28 45° (PR-2B)	Z1	574528		V 18		570125
	M 35 45° (PR-2B)	Z1	574530		V 22		570135
	V 12		570107		V 28		570145
	V 14		570112		V 35		570155
	VG 14		570132		V 42		570165
	V 15		570115		V 54		570175
	V 16		570117		V 12 45° (PR-2B)	Z1	574502
	VG 16		570137		V 15 45° (PR-2B)	Z1	574504
	V 18		570125		V 18 45° (PR-2B)	Z1	574506
	V 22		570135		V 22 45° (PR-2B)	Z1	574508
	V 28		570145		V 28 45° (PR-2B)	Z1	574510
	V 35		570155		V 35 45° (PR-2B)	Z1	574512
	V 42		570165	SANITOP PERMATUBO INOX	M 15		570110
	V 54		570175		M 18 ¹⁾		570120
	V 12 45° (PR-2B)	Z1	574502		M 22		570130
	VG 14 45° (PR-2B)	Z1	574536		M 28 ¹⁾		570140
	V 15 45° (PR-2B)	Z1	574504		M 35		570150
	VG 16 45° (PR-2B)	Z1	574538		M 35 (PR-3S)	Z2	572727
	V 18 45° (PR-2B)	Z1	574506		M 42 (PR-3S)	Z2	572706
	V 22 45° (PR-2B)	Z1	574508		M 54 (PR-3S)	Z2	572708
	V 28 45° (PR-2B)	Z1	574510		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	V 35 45° (PR-2B)	Z1	574512		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
					M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
					M 15 45° (PR-2B)	Z1	574522
					M 18 45° (PR-2B)	Z1	574524
					M 22 45° (PR-2B)	Z1	574526
					M 28 45° (PR-2B)	Z1	574528
					M 35 45° (PR-2B)	Z1	574530

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
SANPRO THPRESS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
SATEC SK ViTerm	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
Schütz duo-flex tri-o-flex	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 25*		570495
Schwer Fittings AQUApress	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Seppelfricke VSH SudoPress C-Stahl Visu-Control	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Seppelfricke VSH SudoPress Edelstahl Visu-Control	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Seppelfricke VSH SudoPress Kupfer Visu-Control	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Seppelfricke VSH SudoPress Kupfer Solar Visu-Control	V 15		570115
	V 18		570125
	V 22		570135
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
Seppelfricke VSH XPress C-Stahl	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Seppelfricke VSH XPress Edelstahl	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
Seppelfricke VSH XPress Kupfer	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
Seppelfricke VSH XPress Kupfer Gas	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
SESTA SESTA GAS	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
SESTA Sistema multistrato	H 16*		570320
	H 20*		570350
	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 20*		570775
SIGMA LI Premium	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 25*		570780
SLOVARM PEX-THERM	U 32		570785
	U 16*		570765
	U 20*		570775
	H 26*		570370
	U 32		570785
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
STANDARD HIDRAULICA MultiStandard	H 16*		570320
	H 20*		570350
	H 25*		570360
	H 32		570380
	RFz 16*		571325
	RFz 20*		571330
	RFz 25		571335
	RFz 32		571340
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
	TH 32		570480
	U 16*		570765
	U 18*		570770
	U 20*		570775
STELBI Polikraft	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	H 16*		570320
	H 20*		570350
	H 26*		570370
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
STELBI Stelgas	TH 63 (PZ-S)		572405
	U 16*		570765
	U 20*		570775
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
			570485

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
STPC STPEX	TH 16* TH 20* TH 26*		570460 570470 570475
System Ewoprex	H 16* H 20* H 26* H 32 TH 16* TH 20* TH 26* TH 32 U 16* U 20* U 32		570320 570350 570370 570380 570460 570470 570475 570480 570765 570775 570785
System WELCO-Gas	H 16 A* H 20 A* H 26 A* H 32 A		570620 570650 570670 570680
System WOPREX	H 14 A* H 16 A* H 17 A* H 20 A* H 26 A* H 32 A H 40 A (PZ-4G)		570610 570620 570630 570650 570670 570680 570695
T			
TDM BRASS Serie 1600	H 16* H 18* H 20* H 25* H 26* H 32 TH 16* TH 18* TH 20* TH 25* TH 26* THL 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) U 16* U 18* U 20* U 25* C 26* U 32		570320 570340 570350 570360 570370 570380 570460 570465 570470 570495 570475 570487 570485 572400 572405 570765 570770 570775 570780 570750 570785
TDM BRASS Serie 1700 gas	TH 16* TH 20* TH 26* THL 32		570460 570470 570475 570487
TermoConcept TC-PRESS	Basic E01 ¹⁾		571855
THERMOLUTZ	H 14* H 16* TH 20*		570310 570320 570470
TE-SA TE-SA press serie 800	TH 14* TH 16* TH 18* TH 20* TH 26* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S)		570455 570460 570465 570470 570475 570480 570485 572400 572405
TIEMME AL-COBRAPEX Serie 1650	TH 14* TH 16* TH 18* TH 20* TH 25* TH 26* THL 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) THz 75 (PR-3B)		570455 570460 570465 570470 570495 570475 570487 570485 572400 572405 572829
TIEMME Serie 1700 PE-X a pressare	RFz 12* RFz 16* RFz 20* RFz 25 RFz 32	Z4	571320 571325 571330 571335 571340
TIEMME TIEMME Gas	TH 16* TH 20* TH 26* THL 32		570460 570470 570475 570487

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
TIGRE ALPEX GÁS	TH 16* TH 20* TH 26* TH 32		570460 570470 570475 570480
TKM Systemtechnik	TH 14* TH 16* TH 20* TH 26* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S)		570455 570460 570470 570475 570480 570485 572400 572405
TRA MULTITRAPRESS	U 16* U 18* U 20* U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S)	Z4	570765 570770 570775 570780 570785 570790 570795 572837 572365
TRA TRAPRESS	H 12* H 16* H 20* H 25* H 32 RFz 12* RFz 16* RFz 20* RFz 25 RFz 32		570300 570320 570350 570360 570380 571320 571325 571330 571335 571340
TUBIPLAST ITALY MULTILAYER PIPE	TH 16* TH 18* TH 20* TH 26* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) H 16* H 18* H 20* H 26* H 32 U 16* U 18* U 20* C 26* U 32		570460 570465 570470 570475 570480 570485 572400 572405 570320 570340 570350 570370 570380 570765 570770 570775 570750 570785
TUBIPLAST ITALY MULTILAYER PIPE GAS SYSTEM	TH 16* TH 18* TH 20* TH 26* TH 32		570460 570465 570470 570475 570480
TWEETOP	U 16* U 20* U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) U 75 (PR-3B)	Z4 Z4	570765 570775 570780 570785 570790 570795 572837 572365 572828
U			
UNICAL AG MAX-MULTIPEX	U 16* U 20* H 26* C 26* U 32		570765 570775 570370 570750 570785
UNIDELTA DeltaI	TH 16* TH 20* TH 26* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) H 16* H 20* H 26* H 32 H 40 (PZ-4G) U 16* U 20* U 32 U 40 U 50 U 63 (PZ-S)		570460 570470 570475 570480 570485 572400 572405 570320 570350 570370 570380 570390 570765 570775 570785 570790 570795 572365

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
UNIDELTA DeltAll GAS	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 16*		570765
	U 20*		570775
	U 32		570785
Uponor MLC	UP 14*		572630
	UP 16*		572632
	UP 18*		572634
	UP 20*		572636
	UP 25		572638
	UP 32		572640
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
Uponor MLC-D	UP 16*		572632
	UP 20*		572636
	UP 25		572638
	UP 32		572640
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
Uponor MLC-G ³⁾	UP 20 ³⁾		572636
	UP 25		572638
	UP 32		572640
Uponor S-Press PLUS	UP 16*		572632
	UP 20*		572636
	UP 25		572638
	UP 32		572640
Uponor Uni Pipe PLUS	UP 16*		572632
	UP 20*		572636
	UP 25		572638
	UP 32		572640
V			
Valsir Bravopress	B 16*		570850
	B 20*		570860
	B 26		570870
	B 32		570880
	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 32 V		570685
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
Valsir PEXAL	H 14*		570310
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	H 32 V		570685
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	U 16*		570765
	U 20*		570775
	C 26*		570750
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	U 75 (PR-3B)	Z4	572828
Van Marcke NV Tubipex	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	THz 75 (PR-3B)	Z4	572829

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Van Marcke NV Tubipress	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
Variotherm System TH	TH 11,6*		570482
	TH 16*		570460
	TH 20*		570470
VESBO VPREMIUM	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PZ-S)		572365
Viega Fonterra	VX 12*		571630
	VP 14/15*		570905
	VP 16/17*		570910
	VP 20*		570915
	VP 25		570920
Viega Megapress	VMP ¾" (OD 17,2 mm)		571740
	VMP ½" (OD 21,3 mm)		571762
	VMPz ¾" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega Megapress S	VMP ¾" (OD 17,2 mm)		571740
	VMP ½" (OD 21,3 mm)		571762
	VMPz ¾" (OD 26,9 mm)		571764
	VMPz 1" (OD 33,7 mm)		571767
	VMPz 1¼" (PZ-S) (OD 42,4 mm)		572413
	VMPz 1½" (PR-3B) (OD 48,3 mm)	Z5	572844
	VMPz 2" (PR-3B) (OD 60,3 mm)	Z5	572845
Viega Megapress S XL	VMP 2½" XL (PR-3B) (OD 76,1 mm)	Z7 XL 45 kN ⁴⁾	579112 R
	VMP 3" XL (PR-3B) (OD 88,9 mm)	Z7 XL 45 kN ⁴⁾	579113 R
	VMP 4" XL (PR-3B) (OD 114,3 mm)	Z7 XL 45 kN ⁴⁾	579114 R
Viega Pexfit	VX 16*		571635
	VX 20*		571640
	VX 25*		571645
Viega Pexfit G	VX 16*		571635
	VX 20*		571640
	VX 25*		571645
Viega Prestabo	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B) ⁶⁾	Z5	572815
	VFz 76,1 (PR-3B) ⁶⁾	Z5	572816
	VFz 88,9 (PR-3B) ⁶⁾	Z5	572817
	VFz 108,0 (PR-3B) ⁶⁾	Z5	572818
	V 12 45° (PR-2B)	Z1	574502
Viega Profipress	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 12		570107
	VG 14		570132
	V 15		570115
	VG 16		570137
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
V 54	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B) ⁶⁾	Z5	572815
	VFz 76,1 (PR-3B) ⁶⁾	Z5	572816
	VFz 88,9 (PR-3B) ⁶⁾	Z5	572817
	VFz 108,0 (PR-3B) ⁶⁾	Z5	572818
	V 12 45° (PR-2B)	Z1	574502
	VG 14 45° (PR-2B)	Z1	574536
	V 15 45° (PR-2B)	Z1	574504
	VG 16 45° (PR-2B)	Z1	574538
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Viega Profipress G	V 12		570107
	VG 14		570132
	V 15		570115
	VG 16		570137
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B) ⁶⁾	Z5	572815
	V 12 45° (PR-2B)	Z1	574502
	VG 14 45° (PR-2B)	Z1	574536
	V 15 45° (PR-2B)	Z1	574504
	VG 16 45° (PR-2B)	Z1	574538
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Viega Profipress S	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
Viega Profipress Therm	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 12		570107
	V 15		570115
	V 18		570125
Viega ProPress System USA	V 22		570135
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	VUS ½" (OD 15,9mm)		571770
	VUS ¾" (OD 22,2mm)		571775
	VUS 1" (OD 28,6mm)		571780
XL-C/XL-S	VUS 1½" (OD 34,9mm)		571785
	VUS 1½" (OD 41,3mm)		571790
	VUS 2" (OD 54,0mm)		571795
	VUSFz 2½" (PR-3B) (OD 66,7mm)	Z5	572819
	VUSFz 3" (PR-3B) (OD 79,4mm)	Z5	572820
Viega ProPress WATER System AUS	VUSFz 4" (PR-3B) (OD 104,8mm)	Z5	572821
	VAU 15 (OD 12,7mm)		572687
	VAU 20 (OD 19,1mm)		572689
	VAU 25 (OD 25,4mm)		572691
	VAU 32 (OD 31,8mm)		572693
Viega ProPressG GAS System AUS	VAU 40 (OD 38,1mm)		572695
	VAU 50 (OD 50,8mm)		572697
	VAU 15 (OD 12,7mm)		572687
	VAU 20 (OD 19,1mm)		572689
	VAU 25 (OD 25,4mm)		572691
Viega Raxinox	VAU 32 (OD 31,8mm)		572693
	VAU 40 (OD 38,1mm)		572695
	VAU 50 (OD 50,8mm)		572697
	VRX 16		571750
	VRX 20		571752
Viega Raxofix	VRX 16		571750
	VRX 20		571752
	VRX 25		571754
	VRX 32		571756
	VRX 40		571758
Viega Sanfix ²⁾	VRX 50		571760
	VRX 63		571797
	VP 16/17 ²⁾		570910
	VP 20 ²⁾		570915
	VP 25 ²⁾		570920
Viega Sanfix Fosta ²⁾	VP 32		570925
	VP 16/17 ²⁾		570910
	VP 20 ²⁾		570915
	VP 25 ²⁾		570920
	VP 32		570925

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
Viega Sanpress	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VR 76,1 (PR-3B) ⁶⁾	Z5	572822
	VR 88,9 (PR-3B) ⁶⁾	Z5	572823
	VR 108,0 (PR-3B) ⁶⁾	Z5	572824
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
Viega Sanpress Inox	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B) ⁶⁾	Z5	572815
Viega Sanpress Inox G	VFz 76,1 (PR-3B) ⁶⁾	Z5	572816
	VFz 88,9 (PR-3B) ⁶⁾	Z5	572817
	VFz 108,0 (PR-3B) ⁶⁾	Z5	572818
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	V 15		570115
	V 18		570125
Viega Smartpress	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 42 (PR-2B)	Z2	572850
	V 54		570175
	V 54 (PR-2B)	Z2	572851
	VFz 64,0 (PR-3B) ⁶⁾	Z5	572815
	VFz 76,1 (PR-3B) ⁶⁾	Z5	572816
	VFz 88,9 (PR-3B) ⁶⁾	Z5	572817
Viessmann	VFz 108,0 (PR-3B) ⁶⁾	Z5	572818
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
Vogel & Noot EASYTEC	V 35 45° (PR-2B)	Z1	574512
	VX 16*		571635
	VX 20*		571640
	VX 25*		571645
	TH 14*		570455
VSH MultiPress	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
VSH MultiPress	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
VSH MultiPress	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
VSH MultiPress	U 14*		570760
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
VSH MultiPress	U 40		570790
	TH 14*		570455
	TH 16*		570460
	TH 20*		570470
	TH 25*		570495
VSH MultiPress	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

REMS pressing tongs
REMS pressing rings

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
VSH SudoPress Carbon	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
VSH SudoPress Copper	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 14 45° (PR-2B)	Z1	574532
	V 15 45° (PR-2B)	Z1	574504
	V 16 45° (PR-2B)	Z1	574534
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
VSH SudoPress Copper Gas	V 12		570107
	V 14		570112
	V 15		570115
	V 16		570117
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
VSH SudoPress Stainless	V 15		570115
	V 18		570125
	V 22		570135
	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
VSH XPress Carbon	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
VSH XPress Copper	M 12		570100
	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	XP 64,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
VSH XPress Copper GAS	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
VSH XPress Stainless	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
VSH XPress Stainless Gas	M 15		570110
	M 18 ¹⁾		570120
	M 22		570130
	M 28 ¹⁾		570140
	M 35		570150
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
W			
Watts MTR Art press	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
WATTS RADIANT Watts WaterPEX	US ¾**		571450
	US ½**		571455
	US ¾**		571460
	US 1**		571465
	US 1 ¼"		571470
	US 1 ½"		571475
WATTS RADIANT Watts RadiantPEX	US ¾**		571450
	US ½**		571455
	US ¾**		571460
	US 1**		571465
WATTS RADIANT Watts RadiantPEX-AL	US 1 ¼"		571470
	US 1 ½"		571475
	U 16 (½")		570765
	U 20 (¾")		570775
	U 25 (¾")		570780
	U 32 (1")		570785
Wavin Tigris K1/M1	U 14*		570760
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)	Z4	572365
	U 75 (PR-3B)	Z4	572828
	UP 14*		572630
	UP 16*		572632
	UP 20*		572636
	UP 25		572638
	UP 32		572640
WeeConPress Alu	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
	V 12		570107
	V 15		570115
	V 18		570125
	V 22		570135
VSH XPress Copper GAS	V 28		570145
	V 35		570155
	V 42		570165
	V 54		570175
	V 12 45° (PR-2B)	Z1	574502
	V 15 45° (PR-2B)	Z1	574504
	V 18 45° (PR-2B)	Z1	574506
	V 22 45° (PR-2B)	Z1	574508
	V 28 45° (PR-2B)	Z1	574510
	V 35 45° (PR-2B)	Z1	574512
	SA 12		570930
	SA 15		570935
	SA 18		570940
	SA 22		570945
	SA 28		570950
VSH XPress Stainless	SA 35		570955
	SA 42 (PR-3S)	Z1	572710
	SA 54 (PR-3S)	Z1	572712

REMS pressing tongs

REMS pressing rings

Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
WeeConPress C-Stahl	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
WeeConPress Inox	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
WeeConPress Kupfer	M 12		570100
	M 15		570110
	M 18		570120
	M 22		570130
	M 28		570140
	M 35		570150
	M 42 (PZ-4G)		570160
	M 54 (PZ-4G)		570170
	M 42 (PR-3S)	Z2	572706
	M 54 (PR-3S)	Z2	572708
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111
	M 12 45° (PR-2B)	Z1	574520
	M 15 45° (PR-2B)	Z1	574522
	M 18 45° (PR-2B)	Z1	574524
	M 22 45° (PR-2B)	Z1	574526
	M 28 45° (PR-2B)	Z1	574528
	M 35 45° (PR-2B)	Z1	574530
WeeConFlex MVR	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	U 40		570790
	U 50		570795
	U 63 (PR-3B)	Z4	572837
	U 63 (PZ-S)		572365
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
WEM	U 16*		570765
WIELAND cuprotherm CTX ²⁾	TH 14 ²⁾		570455
	TH 16 ²⁾		570460
	TH 18 ²⁾		570465
	TH 20 ²⁾		570470
	TH 26 ²⁾		570475
WKS-Press	TH 14*		570455
	TH 16*		570460
	TH 17*		570462
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485

System	Pressing tongs / pressing rings	Driven by adapter tongs	Art.-No.
WÜRTH Würth	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
	HE 32		571900
X			
XtraConnect	F 16*		570717
	F 20*		570727
	F 26*		570730
	F 32		570735
	F 16 45° (PR-2B)	Z1	574550
	F 20 45° (PR-2B)	Z1	574552
	F 26 45° (PR-2B)	Z1	574554
	F 32 45° (PR-2B)	Z1	574556
	H 16*		570320
	H 20*		570350
	H 26*		570370
	H 32		570380
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
(DN 26)	TH 32		570480
	U 16*		570765
	U 20*		570775
	U 25*		570780
	U 32		570785
	VP 16*		570910
	VP 20*		570915
	VP 32		570925
Z			
Zetaesse Multistrato EUROPEX	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
Zetaesse Multistrato ISOPEX	TH 14*		570455
	TH 16*		570460
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	U 14*		570760
	U 16*		570765
	U 18*		570770
	U 20*		570775
ZEWO THERM Zewo Press Premium	TH 12*		570452
	TH 16*		570460
	TH 17*		570462
	TH 18*		570465
	TH 20*		570470
	TH 26*		570475
	TH 32		570480
	TH 40		570485
ZEWO THERM Zewo Press PPSU	TH 50 (PZ-S)		572400
	TH 63 (PZ-S)		572405
	TH 16*		570460
	TH 20*		570470
	TH 26*		570475
ZURN INDUSTRIES ZURN PEX	TH 32		570480
	US ¾**		571450
	US ½**		571455
	US ¾**		571460
	US 1**		571465
	US 1 ¼"		571470
	US 1 ½"		571475
	US 2"		571477

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations.

* These pressing tongs also fit the manual radial press REMS Eco-Press. Observe the national regulations.

¹⁾ Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

³⁾ Driven by REMS Power-Press XL ACC.

⁴⁾ Driven by REMS Akku-Press XL 45 kN 22 V ACC.

⁵⁾ For taking suitable pressing inserts.

⁶⁾ Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.

⁷⁾ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.

The suitability of REMS pressing tools for pressfitting systems: Date 14.10.2020. For the updated situation regarding suitability status check our website:

www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

See page 212 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

Accessories

For REMS radial presses (except for REMS Mini-Press)
and suitable radial presses of other makes

Description	Art.-No.	
Adapter tongs Z1 for driving REMS pressing rings 45° (PR-2B)	574500	
Adapter tongs Z2 for driving REMS pressing rings M 35–54 (PR-3S), V 42–54 (PR-2B), RN 40–50 (PR-3S)	572795	
Adapter tongs Z4 for driving REMS pressing rings F 75 (PR-3B), TH 63–75 (PR-3B), U 63–75 (PR-3B), RN 63 (PR-3B)	572801	
Adapter tongs Z5 for driving REMS pressing rings VFz/VR 64–108 (PR-3B), VMPz 1½–2" (PR-3B), VUSFz 2½–4" (PR-3B), VAUFz 65–100 (PR-3B)	572802	
Adapter tongs Z6 XL for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S) with REMS Power-Press XL ACC	579120	
Adapter tongs Z7 XL 45 kN for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S), 2½–4" XL (PR-3B) with REMS Akku-Press XL 45 kN 22 V ACC	579123	
Steel case with insert for 6 pressing tongs (up to Ø 35 mm/1" and pressing tongs U 40, U 50, TH 40, F 40, F 50, G 40, VUS 1¼")/cropping tongs and compartment for pipe cutter up to 42 mm	570295	
Steel case with insert for 2 pressing tongs (M 42 (PZ-4G), M 54 (PZ-4G), V 42, V 54, H 40, H 40 A, VUS 1½", VUS 2")	570290	
Steel case with insert for adapter tongs Z2 and pressing rings M 42 (PR-3S) and M 54 (PR-3S) or pressing rings SA 42 (PR-3S) and SA 54 (PR-3S).	572810	
Steel case with insert for adapter tongs Z5 and 4 pressing rings VFz 64.0–108.0/VR 76.1–108.0/ VUSFz 2½–4" (PR-3B)	572809	
Steel case with insert for adapter tongs Mini Z1 and adapter tongs Z1 and 6 REMS pressing rings V 12–35 45° (PR-2B) or M 12–35 45° (PR-2B) or F 16–32 45° (PR-2B)	574516	
L-Boxx system case with inserts for 8 pressing tongs (2B) and 6 pressing rings 45° (PR-2B)	571136	
L-Boxx system case with inserts for 3 different pressing rings VMPz 2½–4" XL (PR-3B)	571137	
XL-Boxx system case with inserts for 3 different pressing rings 64.0–108.0 XL (PR-3S) or 2½–4" XL (PR-3S)	579603	
Steel case with inserts for adapter tongs Z2 and pressing rings V 42 (PR-2B) and V 54 (PR-2B)	572813	



Confirmation of suitability

The suitability of crimping tools is determined basically by the manufacturer of crimping tools. Moreover the suitability of REMS crimping tools has been confirmed by the system manufacturer/supplier himself or approved through independent testing institutes.

Confirmation of suitability through the system manufacturer/supplier

More than 90 % of the manufacturers/suppliers of the pressfitting systems listed herein have tested REMS pressing tongs and confirmed the suitability for their pressfitting system.

Confirmation of suitability through independent testing institutes

The suitability of REMS pressing tongs for additional pressfitting systems have been confirmed through independent technical institutes:

TÜV-Certificates

Exist for Geberit Mepla, Geberit Mapress C-STAHl, Geberit Mapress EDELSTAHL, Geberit Mapress Kupfer, Nussbaum Cupress, Nussbaum Optipress, Uponor Unipipe, Viega-'profipress', Viega-'profipress G', Viega-'sanfix P', Viega-'sanpress', Viega-'Viegatherm P', Wavin Tigris. The TÜV-certificates confirm that REMS crimping tools are suitable for producing perfect and system-conformity pressing joints corresponding to these systems.

Suitability test according to DVGW W 534 (potable water)

Pressing joints produced with REMS pressing tools were tested by the state-operated material testing institute in Darmstadt/Germany or the material testing institute of the Land of North-Rhine-Westphalia, Germany according to DVGW work sheet W 534. These material testing institutes are certified by the DVGW for making these tests. A representative cross-section of press joints of pressfitting systems Geberit Mapress Edelstahl, Raccorderie Metalliche inoxPRES, Raccorderie Metalliche steelPRES, Uponor Unipipe, Viega Megapress, Viega Profipress and Viega Raxofix. was tested. The tests led to the result that all REMS pressing tools are suitable for producing perfect and system conformity pressing joints in accordance with these systems.

Suitability test according to DVGW G 5614/VP 625 or prEN 1254-7 (gas)

Pressing joints made with REMS pressing tools have been tested by the TÜV or by the Land Material Testing Institute Nordrhein-Westfalen or the DVGW Research Institute Karlsruhe according to DVGW Regulations G 5614/VP 625 or by the BSI (UK) according to prEN 1254-7. A representative cross-section of pressing joints of the pressfitting systems Geberit Mapress Edelstahl Gas, Geberit Mapress Kupfer Gas, Henco Gas, IBP >B<press Gas, Kembla KemPress Gas, Pegler Yorkshire X-Press Copper Gas, Raccorderie Metalliche inoxPRES Gas, Uponor MLC-G, Valsir PEXAL Gas, Viega Profipress G, Viega Pexfit G, Viega Sanpress INOX G, Viega PropressG GAS System (AUS) was tested. The tests led to the result that all REMS pressing tools are suitable for producing perfect and system conformity pressing joints in accordance with these systems.



potable water



gas

Hold-Harmless and Indemnification Agreement

REMS is the first system-independent machine and tool manufacturer to sign liability acceptance agreements for pressing tools.

A hold-harmless and indemnification agreement exists with the:

Zentralverband Sanitär Heizung Klima (Central Organization for the Sanitary-, Heating- and Climatization Industries),
Rathausallee 6, D-53757 St. Augustin,
referred to in the following as "ZVSHK",

Bundesindustrieverband Technische Gebäudeausrüstung e.V.,
Hinter Hoben 149, 53129 Bonn,
referred to in the following as "BTGA",

Verband Deutscher Kälte-Klima-Fachbetriebe e. V. (German Association for Coolant & Air-Conditioning Profession Industries),
Kaiser-Friedrich-Straße 7, D-53113 Bonn,
referred to in the following as "VDKF",

Schweizerisch-Liechtensteinischem Gebäudetechnikverband (Swiss-Liechtenstein Technical Building Association),
Auf der Mauer 11, CH-8023 Zürich,
referred to in the following as "suissetec",

The Zentralverband Sanitär Heizung Klima (ZVSHK), the Bundesindustrieverband Technische Gebäudeausrüstung e. V. (BTGA), the Verband Deutscher Kälte-Klima-Fachbetriebe e. V. (VDKF) and the Schweizerisch-Liechtensteinische Gebäudetechnikverband (suissetec) have made liability acceptance agreements in the interests of trade and industry with REMS GmbH & Co KG (REMS) for the radial pressing tools.

- Manual radial press REMS Eco-Press
- Cordless radial press REMS Mini-Press ACC
- Cordless radial press REMS Mini-Press 22V ACC
- Cordless radial press REMS Mini-Press S 22V ACC
- Electric radial press REMS Power-Press SE
- Electro-hydraulic radial press REMS Power-Press
- Electro-hydraulic radial press REMS Power-Press ACC
- Electro-hydraulic radial press REMS Power-Press XL ACC
- Cordless radial press REMS Akku-Press
- Cordless radial press REMS Akku-Press ACC
- Cordless radial press REMS Akku-Press 22V ACC
- Cordless radial press REMS Akku-Press XL 45 kN 22V ACC
- REMS pressing tongs
- REMS pressing rings
- REMS pressing tongs Mini

This makes REMS the first system-independent machine- and tool manufacturer to have concluded a hold-harmless and indemnification agreement for pressing tools. The conclusion of the agreement was effected on the basis of a successful cooperation established on partnership between REMS, the crafts, trades and industry and their organizations.

Eligible for services and performances from this agreement are all independent professional craftsmen, and companies of such, who are enrolled in the register of artisans and craftsmen (referred to in the following as "SHK-Establishments"), in as far as they have been members of the crafts guild of the sanitary- heating- and climatization enterprises competent for their business location at the time the damage event has arisen, and this crafts guild is associated with a regional guild association, which is a member of the ZVSHK.

Entitled to the services from the agreement with the BTGA are all building technology companies (hereinafter referred to as "TGA companies") insofar as they were a member of the Land Industry Association **Technical Building Equipment** responsible at the seat of their company at the time of the damage case and therefore an indirect member of the BTGA or direct member of the BTGA.


Eligible for services and performances from this agreement with the VDKF are all coolant systems companies or professional organisations (referred to as Coolant and Air-Conditioning Profession Industries) who, at the time the damage is caused, are members of the VDKF.

Eligible for services and performances from this agreement are all building systems companies (following TGA companies) who, at the time the damaged is caused, are members of suissetec.

In as far as the radial pressing tools mentioned show a defect with regard to construction, manufacture or material, or if the operator's manuals are faulty, thereby causing damage for the customer of the SHK-establishment, the Coolant and Air-Conditioning Profession Industries, or the TGA-companies, for which the SHK-establishment or the TGA-company is liable, then REMS shall be additionally liable - aside of the statutory prescriptions – for the consequences resulting from leakage, in accordance with the stipulations and provisions of this hold-harmless agreement.

The assumption of liability agreements apply regardless of which pressfitting system is pressed with the suitable REMS pressing tools. The current status regarding suitability of the REMS pressing tools for pressfitting systems can be viewed on the Internet: www.rems.de → Downloads → Product catalogues, brochures → REMS Catalogue.

Please consult Mr. Walter Hindelang for further information:
walter.hindelang@rems.de.

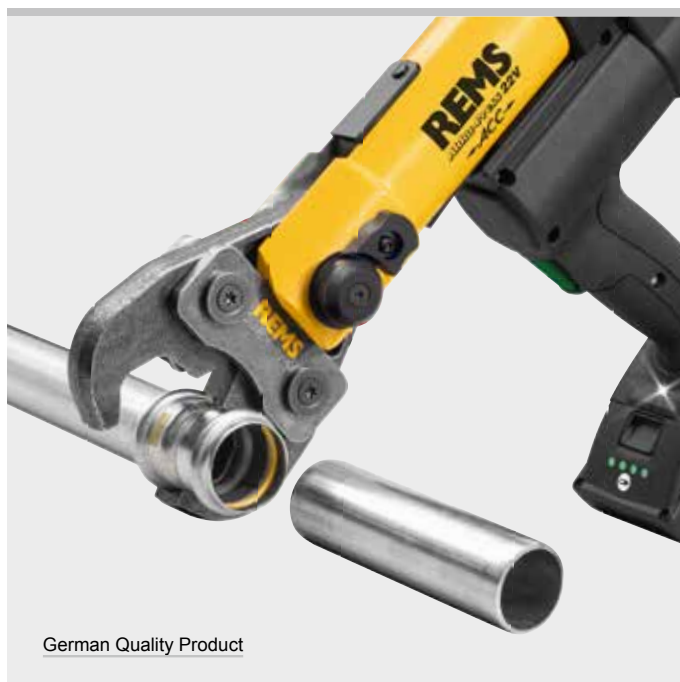

Reliable and safe: REMS was the first system-independent machine and tool manufacturer to sign liability acceptance agreements for pressing tools as early as the year 2000.

