

BSH clips are rubber lined universal clips for mounting pipes to the wall or ceiling.




Advantages

- Clip with handy, quick closing mechanism.
- Close fitting possible.
- Bolt with slot and cross head.
- Suitable for high loads and temperatures.

Technical Specifications

- Noise suppressing rubber lining: 15 dB(A) according to ISO 3822-1.
To achieve maximum sound suppression do not overload the fitting.
- Safety margin for minimal breaking load (V) = 3.
- Clip: electrolytically zinc plated.
- BSH clips are compatible with pipe sizes as per DIN 2448 and DIN EN 1057.
- With halogen-free inlay.
- Equipped with Philips / slotted head screws.

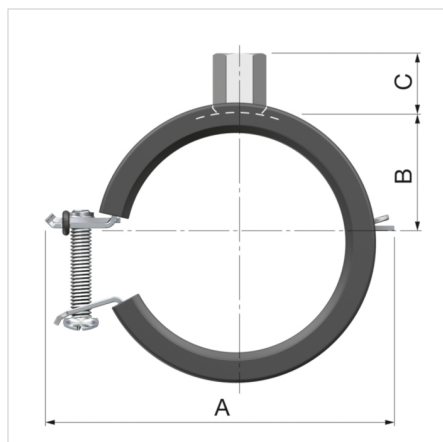

Type	Ø Pipe		Connection	Strip dimensions [mm]	Max. working load [N]	Dimensions				Order Code
	Ext. dia. [mm]	Nom. ["]				A [mm]	B [mm]	C [mm]		
BSH M 8/10 12 - 14	12 - 14	1/4	M 8/10	20 x 1.5	1000	50	7.0	15	50	38360
BSH M 8/10 15 - 18	15 - 18	3/8	M 8/10	20 x 1.5	1000	54	9.0	15	50	38361
BSH M 8/10 19 - 22	19 - 22	1/2	M 8/10	20 x 1.5	1000	58	11.0	15	50	38362
BSH M 8/10 23 - 26	23 - 26	-	M 8/10	20 x 1.5	1000	62	13.0	15	50	38363
BSH M 8/10 27 - 30	27 - 30	3/4	M 8/10	20 x 1.5	1000	66	15.0	15	50	10-38364
BSH M 8/10 32 - 35	32 - 35	1	M 8/10	20 x 1.5	1000	71	17.5	15	50	38365
BSH M 8/10 36 - 39	36 - 39	-	M 8/10	20 x 1.5	1000	75	19.5	15	50	38366
BSH M 8/10 40 - 44	40 - 44	1 1/4	M 8/10	20 x 1.5	1000	80	22.0	15	50	38367
BSH M 8/10 48 - 52	48 - 52	1 1/2	M 8/10	20 x 1.5	1000	88	26.0	15	50	38368
BSH M 8/10 53 - 58	53 - 58	-	M 8/10	20 x 1.5	1000	94	29.0	15	50	38369
BSH M 8/10 58 - 61	58 - 61	2	M 8/10	20 x 1.5	1000	97	30.0	15	50	10-38370
BSH M 8/10 62 - 67	62 - 67	-	M 8/10	20 x 2.0	1300	103	33.5	15	50	38379
BSH M 8/10 68 - 74	68 - 74	-	M 8/10	20 x 2.0	1300	110	37.0	15	50	38371
BSH M 8/10 75 - 80	75 - 80	2 1/2	M 8/10	20 x 2.0	1300	116	40.0	15	50	10-38372
BSH M 8/10 81 - 86	81 - 86	-	M 8/10	20 x 2.0	1300	122	43.0	15	50	38373
BSH M 8/10 87 - 92	87 - 92	3	M 8/10	20 x 2.0	1300	128	46.0	15	50	38374
BSH M 8/10 100 - 106	100 - 106	3 1/2	M 8/10	20 x 2.5	1300	146	53.0	15	25	38375
BSH M 8/10 108 - 116	108 - 116	4	M 8/10	20 x 2.5	1300	156	58.0	15	25	38376
BSH M 8/10 121 - 127	121 - 127	-	M 8/10	20 x 2.5	1300	167	63.5	15	25	38377



Find more information online:

[cert.bsh-iso3822-1.pdf](#)

[BSH M 8/10 REVIT](#)

[BSH M 8/10 ADSK](#)

[BSH M 8/10 DWG](#)

[BSH M 8/10 IPT](#)

[BSH M 8/10 STEP](#)

[Thermal length change](#)

[Dimensions and weights of tubes](#)

[Export catalogue](#)

[Packaging data](#)

[FlamcoFix BSI vs. BSH | Which is the fastest to mount a pipe](#)

[cert.bsh-iso3822-1.pdf](#)
[BSH M 8/10 REVIT](#)
[BSH M 8/10 ADSK](#)
[BSH M 8/10 DWG](#)
[BSH M 8/10 IPT](#)
[BSH M 8/10 STEP](#)
[Thermal length change](#)
[Dimensions and weights of tubes](#)
[Export catalogue](#)
[Packaging data](#)
[FlamcoFix BSI vs. BSH | Which is the fastest to mount a pipe](#)
Fort Blauwkapel 1
1358 DB, Almere - nl

T +31 (0)36 52 62 300
E info@aalberts-hfc.com
I flamcogroup.com