


For mounting insulated pipework to wall and ceiling.

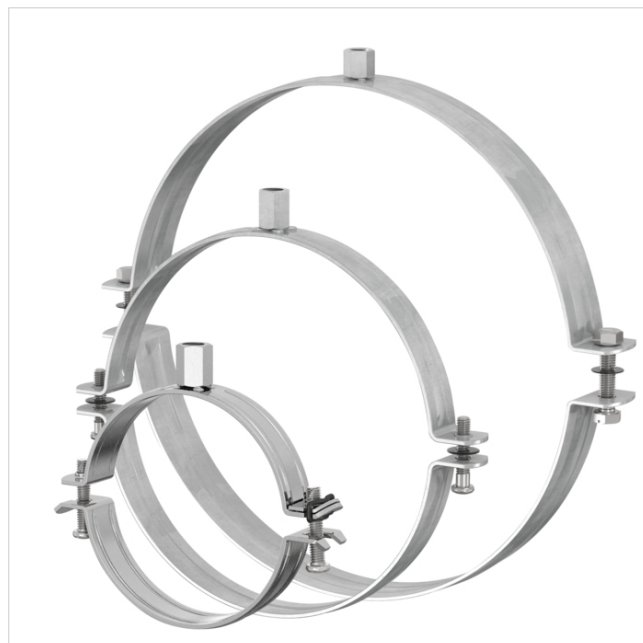


Advantages

- CK 0 - 15: Suited with a quick-locking system and special retaining Phillips head screws.
- CK 16 - 18: Fitted with retaining rings to prevent loss of the Phillips head screws.
- CK 19 - 26: Fitted with hex nuts and bolts for high loads.

Technical Specifications

- Electrolytically zinc plated.
- Connection CK 0 - 18: M 8/10.
- Connection CK 19 - 26: M 10/12.

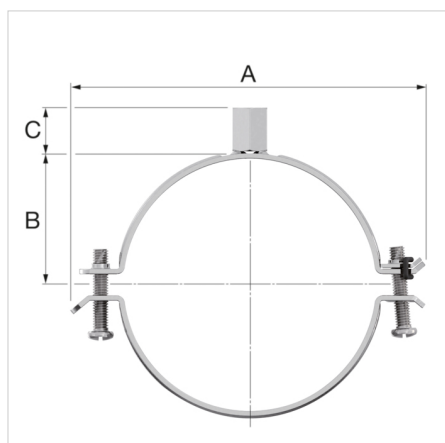

Type	Ø clip int. dia. [mm]	Strip dimensions [mm]	Max. working load [N]	Dimensions				Order Code
				A [mm]	B [mm]	C [mm]		
CK 0	35 - 38	20 x 1.5	1000	73	20	15	50	37522
CK 1	41 - 44	20 x 1.5	1000	81	22	15	50	37500

Type	Ø clip int. dia. [mm]	Strip dimensions [mm]	Max. working load [N]	Dimensions			 -	Order Code
				A [mm]	B [mm]	C [mm]		
CK 2	46 - 48	20 x 1.5	1000	85	24	15	50	37501
CK 3	50 - 53	20 x 1.5	1000	90	26.5	15	50	37502
CK 4	58 - 61	20 x 1.5	1000	98	30.5	15	50	37503
CK 5	64 - 67	20 x 1.5	1000	104	33.5	15	50	37504
CK 6	67 - 70	20 x 1.5	1000	107	35	15	50	37505
CK 7	73 - 76	20 x 2.0	1300	115	38	15	50	37506
CK 8	80 - 83	20 x 2.0	1300	122	41.5	15	50	37507
CK 9	84 - 89	20 x 2.0	1300	128	44.5	15	50	37508
CK 10	90 - 95	20 x 2.0	1300	134	47.5	15	50	37509
CK 11	96 - 101	20 x 2.0	1300	140	50.5	15	50	37510
CK 12	109 - 115	20 x 2.5	1300	155	57.5	15	50	37511
CK 13	118 - 125	20 x 2.5	1300	165	62.5	15	25	37512
CK 14	121 - 127	20 x 2.5	1300	167	63.5	15	25	37513
CK 15	131 - 136	20 x 2.5	1300	177	68	15	25	37514
CK 16	142 - 150	20 x 2.5	2150	192	75	15	25	37515
CK 17	158 - 163	20 x 2.5	2150	205	81.5	15	25	37516
CK 18	164 - 169	20 x 2.5	2150	211	84.5	15	25	37517
CK 19	183 - 189	40 x 2.5	3000	245	94.5	18	25	37518
CK 20	194 - 202	40 x 2.5	3000	263	101	18	25	37519
CK 21	204 - 211	40 x 2.5	3000	270	105.5	18	25	37520
CK 22	222 - 229	40 x 2.5	3000	288	114.5	18	25	37521
CK 23	235 - 260	40 x 2.5	3000	319	132.5	18	10	37523
CK 24	260 - 285	40 x 2.5	3000	344	145	18	10	37524
CK 25	295 - 325	40 x 2.5	3000	384	165	18	10	37525
CK 26	339 - 375	40 x 2.5	3000	434	190	18	10	37526

Find more information online:
[Thermal length change](#)
[Dimensions and weights of tubes](#)
[Export catalogue](#)
[Packaging data](#)

[Thermal length change](#)
[Dimensions and weights of tubes](#)
[Export catalogue](#)
[Packaging data](#)
Fort Blauwkapel 1
1358 DB, Almere - nl

T +31 (0)36 52 62 300
E info@aalberts-hfc.com
I flamcogroup.com