

Pegler Ball Valve With Extended Stem (2 X Compression)



group: PB350EL category: valves product line: Pegler Ball Valve

The PB350 DZR extended lever ball valve is a compact, easy to operate, quarter turn ball valve with 2 compression ends and a blue handle.

- PN16
- full bore
- blow-out and vandal proof assembly
- PTFE ball seals
- Extended lever handle

applications

potable water, heating, cooling,
steam, compressed air

segments

commercial building , industry

approvals

WRAS

assortment

item number	size	dimensions	weight	packaging	gtin
254243	15 (DN15)	25x90x130 mm	0.35 kg	box (10 pce)	05022050259165
254244	22 (DN20)	30x110x145 mm	0.5 kg	-	05022050259349
254245	28 (DN25)	40x120x155 mm	0.78 kg	box (5 pce)	05022050259523

specifications - characteristics

color	brass
materials	brass (CW602N (DZR))
finishing	none
shape	straight (0°)
connection type	compression
pressure rating (PN)	PN 16
sealing	FPM, PTFE

specifications - general


product group	valves (ball valves)
ETIM class	EC011343 Ball valve
HS code	84818081
brand	Pegler
series	Ball Valve
product type	PB350EL
UNSPS	40141607

specifications - technical

max operating pressure liquid	16 bar
min. medium temperature	-10 °C
max medium temperature	120 °C
peak medium temperature	30 °C
Kv-value	value depends on the item view items

item number	size	DN1	l1	z1	slw1	DN2	l2	z2	slw2	M1	M2	E	H
254243	15 (DN15)	1/2" (DN15)	38	26	24	1/2" (DN15)	38	26	24	10	96	24	81
254244	22 (DN20)	3/4" (DN20)	43	27	32	3/4" (DN20)	43	27	32	10	96	24	102
254245	28 (DN25)	1" (DN25)	49	31	38	1" (DN25)	49	31	38	11	101	25	107

item number	size	h2	Y	V	U	a
254243	15 (DN15)	14	16	23	14	90
254244	22 (DN20)	15	16	23	18	90
254245	28 (DN25)	17	20	35	18	90

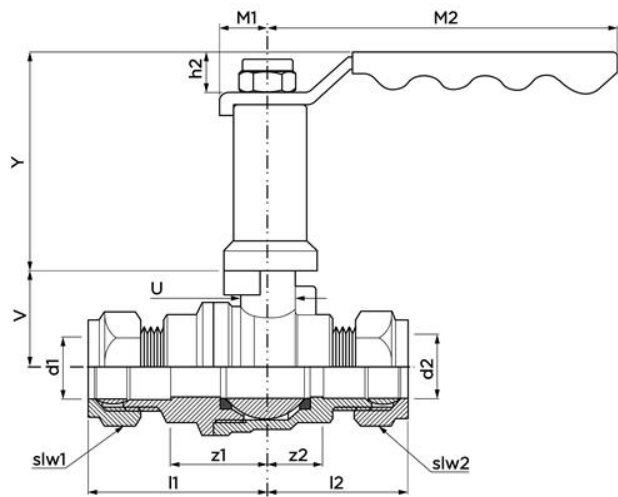

downloads

 PB350EL - png

 Diagram - jpg