

Draincock



group: 833GMLS category: valves product line: Pegler Draincock

The Prestex 833GM LS is a gunmetal draincock with lock shield and male tapered thread. By using Prestex in your piping system you can install in easy to use heat free system. Prestex provides a piping suitable for domestic and light commercial applications.

- No need for use of naked flames
- Can be used on wet pipework
- Joints can be dismantled without adversely affecting performance
- Provided with all relevant approvals

applications



potable water



heating



cooling

segments



commercial building

approvals



NSF



UK water regulation 4

assortment

item number	size	dimensions	weight	packaging	gtin
542037	R1/2"	60x20x50 mm	0.13 kg	box (20 pce)	05013866007903

specifications - characteristics

color	bronze
materials	bronze (EN CC499K)
finishing	none
shape	straight (0°)
connection type	R - male thread gas conical (BSPT), hose connector
pressure rating (PN)	PN 20
sealing	EPDM


specifications - general

product group	valves (fill and drain valves)
ETIM class	ECO10985 Drain valve (radiator and tap water)
HS code	84818019
brand	Pegler
series	Draincock
product type	833GMLS
UNSPS	40141654

specifications - technical

max operating pressure liquid	20 bar
min. medium temperature	30 °C
max medium temperature	120 °C
min. medium temperature	110 °C

item number	size	d1	DN1	l1	z1	slw1	l2	slw2	V	a
542037	R1/2"	15.0	1/2" (DN15)	19	5	25	39	19	13	55

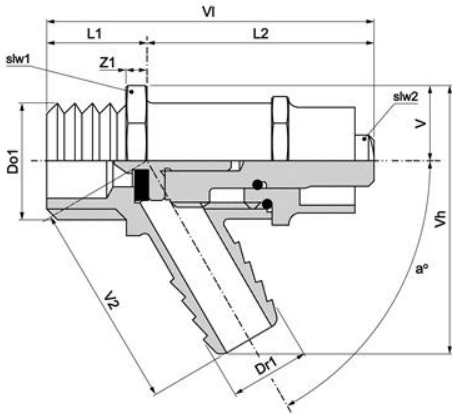

downloads

- [833GMLS - jpg](#)
- [Diagram - jpg](#)
- [Pegler Valve Installation Instructions - pdf](#)