






SW-Clamp

for an easy and quick fastening of all
 established pipes of 14 - 35 mm diameter (1/2" - 1 1/4")
 on a wall or a ceiling


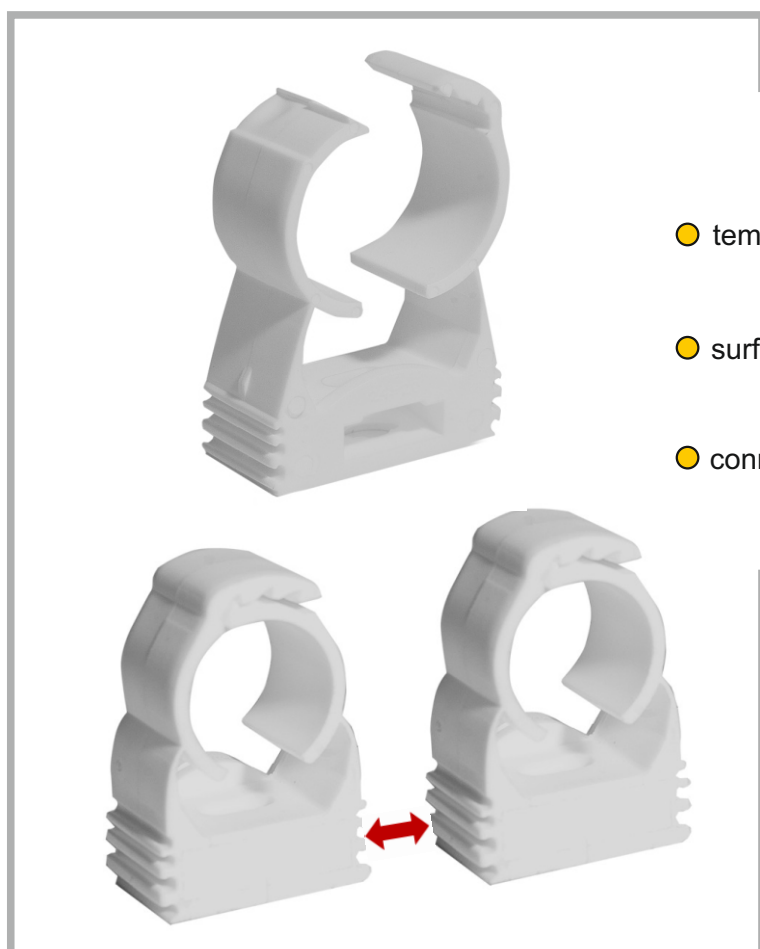



- temperature resistance: - 30 ° to + 85 ° C
- surface UV-proof
- connector system combinable with all sizes

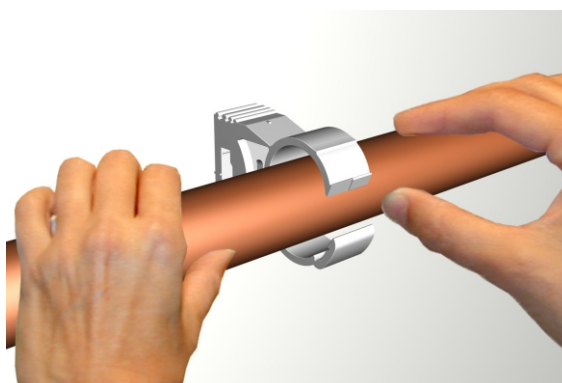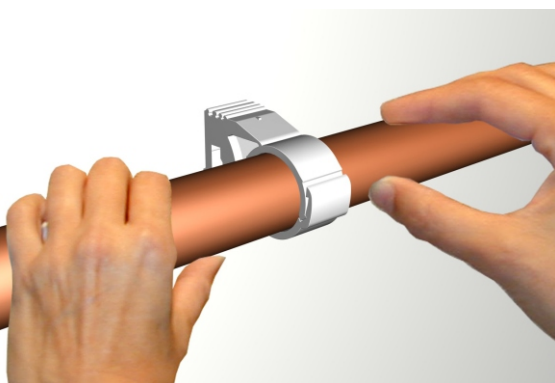

Subject to technical changes GT 08.16/02

- bracket
for mounting 2 SW-clamps
up to max. SW 20

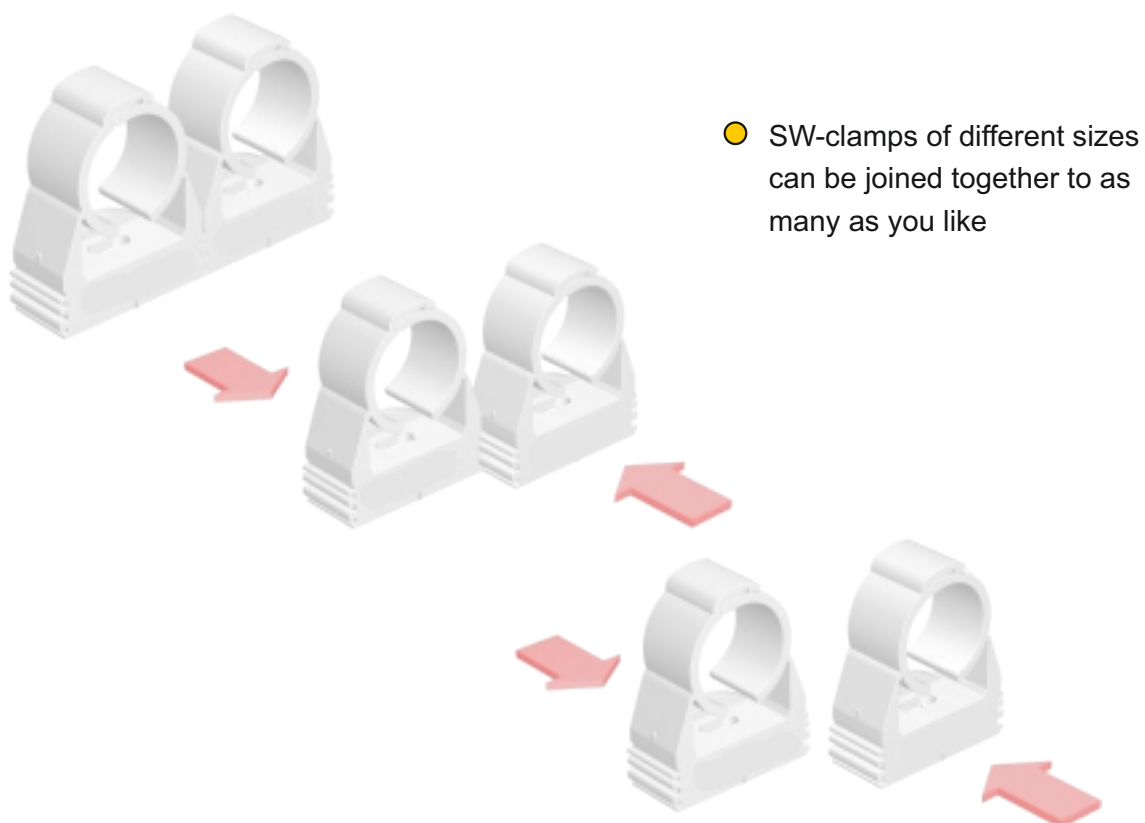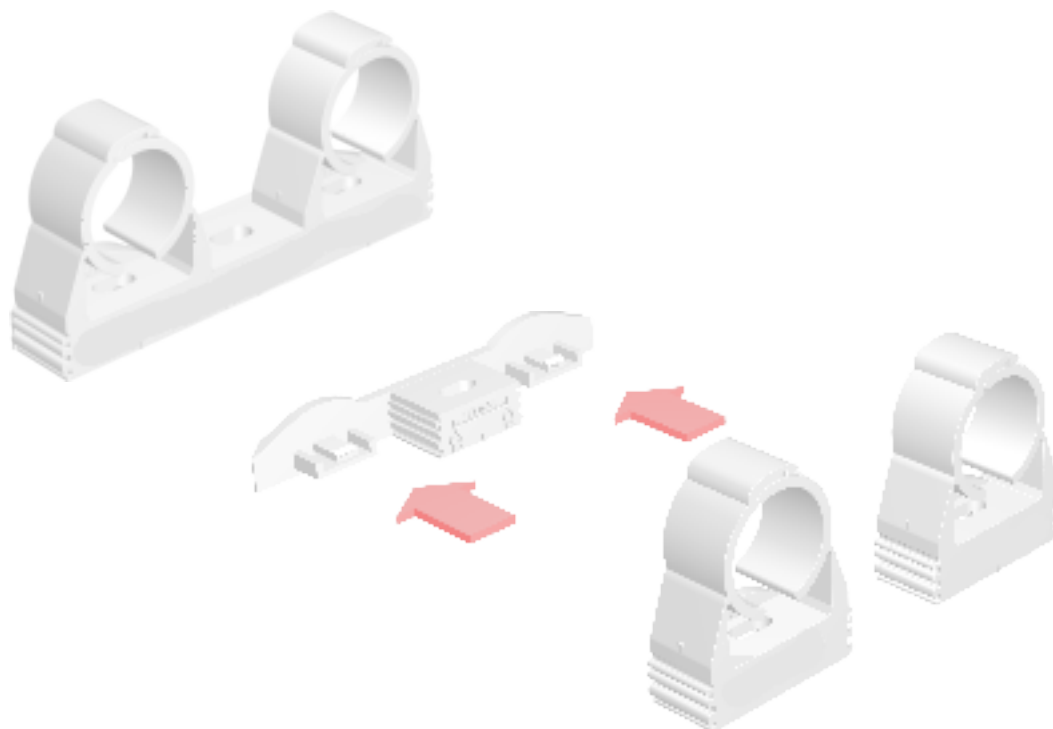

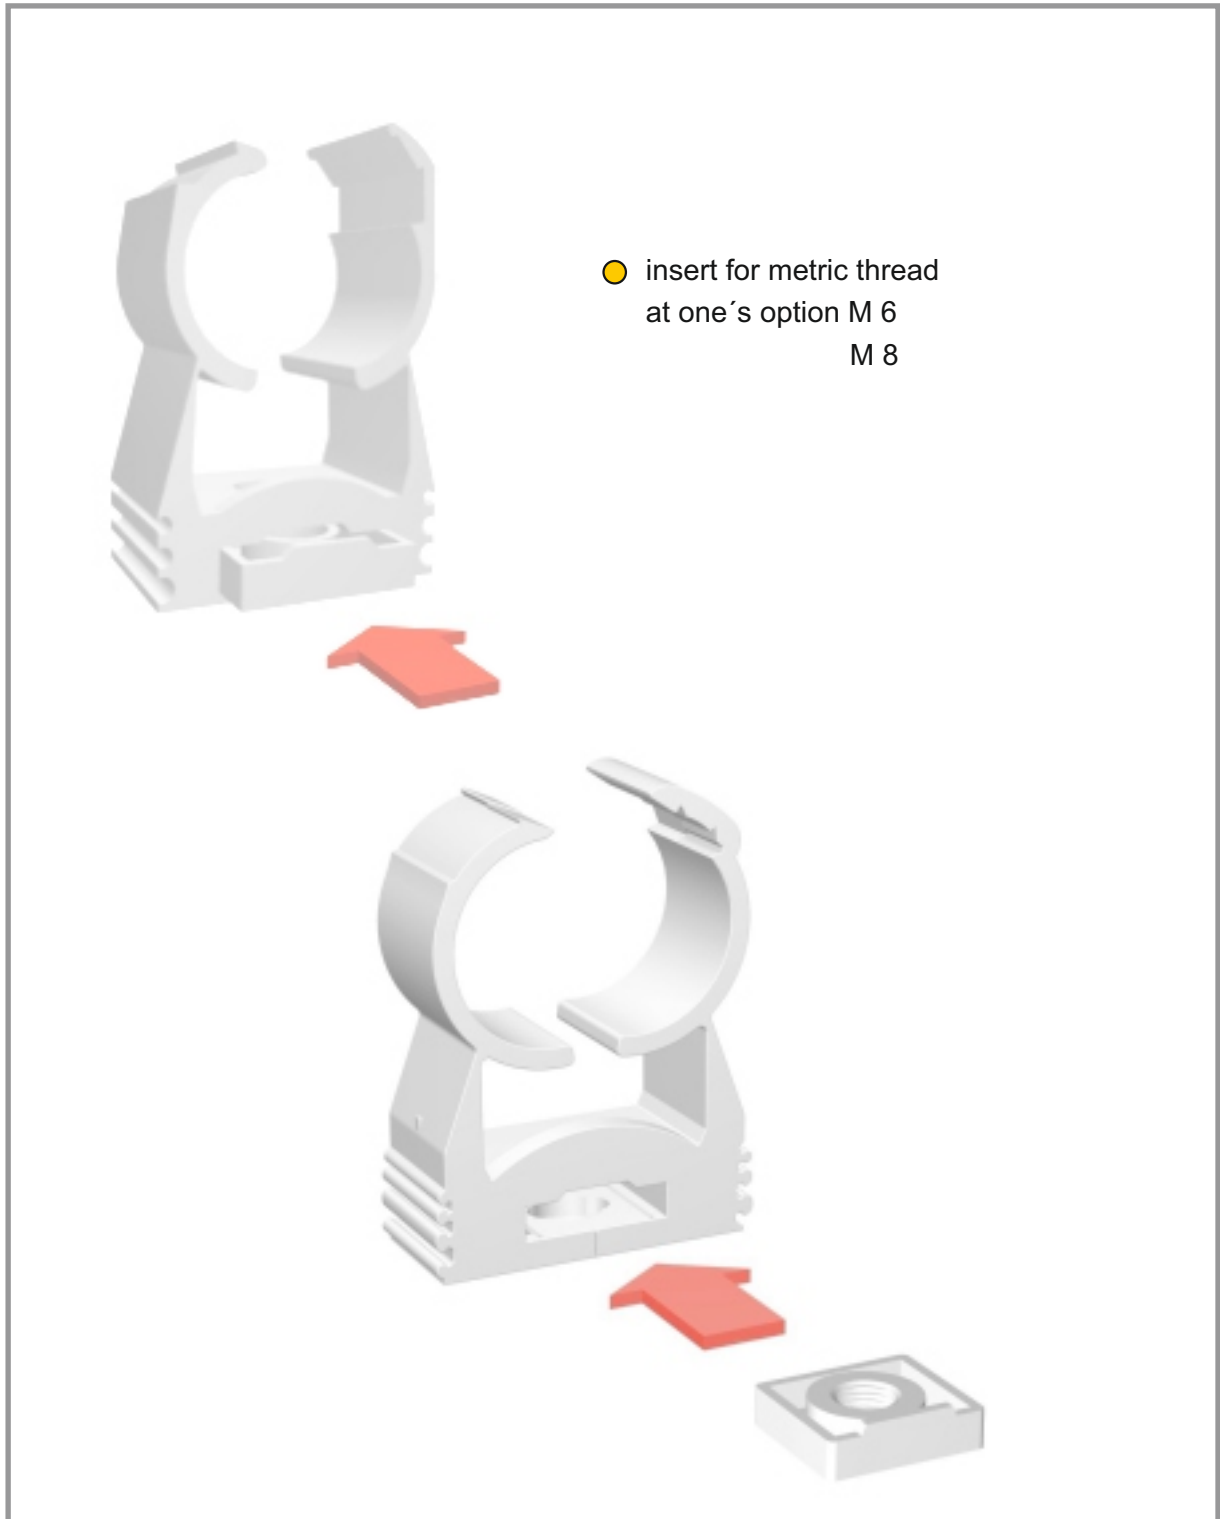


Adapter CHA

adapter for mounting SW-clamp
on the Strut-Adapter CHSTAK



CHA

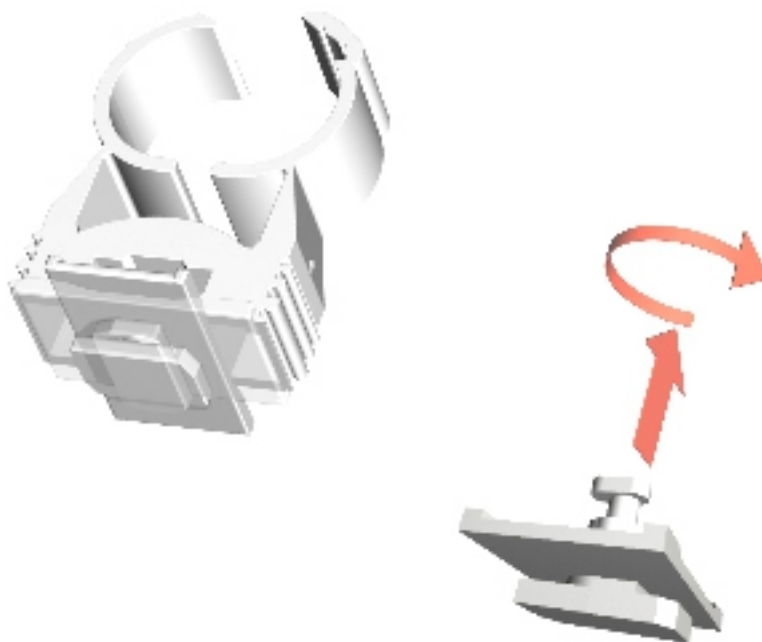

SW-Clamp



Strut-Adapter CHSTAK

adapter to fix a SW-clamp on a metal rail
by using the CHA



Technical Data

Technical Data					
item No.	for tubing OD	colour	material	packing unit	weight approx.
SW15W	14,0 - 16,5 mm (1/2")	white (other colours on request)	polyamide	100 / box	0,6 kg (1.3 lbs.)
SW17W	16,5 - 19,5 mm (5/8")			100 / box	0,6 kg (1.3 lbs.)
SW20W	19,5 - 24,0 mm (3/4")			50 / box	0,4 kg (0.9 lb.)
SW25W	24,2 - 28,0 mm (1")			50 / box	0,5 kg (1.1 lbs.)
SW32W	31,2 - 35,8 mm (1 1/4")			50 / box	0,7 kg (1.4 lbs.)
Accessories :					
Bracket for mounting:		CH-Duo 2050 for mounting 2 SW-clamps up to max. SW 20, 100 / box, 1200 / carton - 8,6 kg (18,9 lbs.)			
Thread insert (at one´s option)					
M6 (CHM6)		100 / box, 1000 / carton		0,9 kg (2,0 lbs.)	
M8 (CHM8)		100 / box, 1000 / carton		0,8 kg (1,8 lbs.)	
Metal-adapter for thread					
M 10 (CHM10AD)		50 / box, 500 / carton		5,5 kg (12,1 lbs.)	
Adapter CHA		20 / box, 200 / carton		0,8 kg (1,8 lbs.)	
Strut-Adapter CHSTAK		100 /box, 1000 / carton		0,8 kg (1,8 lbs.)	