

## Product Data Sheet

### T-plus Cast Iron

The T-plus is specially designed to create perfect branches quickly and easily, whilst the system remains in operation.

The design of the T-plus is unique and responds precisely to the requirements of installers and their customers. The combination of a plunger, striking pin and a trigger sets the new standard in the creation of branches for systems in operation.

The new branching mechanism (the trigger) means perfect installation everywhere, everytime. Once the pin is removed, the charge ignites and the striking pin shoots straight forward. This makes a clean cut in the pipe creating the branch. This makes it possible to make branches even where there is little available space. There is no need to use a hammer any more.

#### Areas of application

- Central heating and cooling installations.
- Potable installations.
- Solar installations.
- Fire protection systems.
- Industrial applications such as compressed air systems.



Type	Ø Pipe		Branch connection	Permissible wall thickness		Torque [Nm]	###	Order Code
	Nom.	Ext. [mm]		Min. [mm]	Max. [mm]			
T-plus DN 15 x Rp 1/2	1/2"	21.3	Rp 1/2"	2.0	3.25	10	1	90615
T-plus DN 20 x Rp 1/2	3/4"	26.9	Rp 1/2"	2.0	3.25	10	1	90620
T-plus DN 25 x Rp 3/4	1"	33.7	Rp 3/4"	2.0	4.05	16	1	90626
T-plus DN 32 x Rp 1	1 1/4"	42.4	Rp 1"	2.0	4.05	16	1	90632
T-plus DN 40 x Rp 1 1/4	1 1/2"	48.3	Rp 1 1/4"	2.3	4.05	30	1	90640
T-plus DN 50 x Rp 1 1/4	2"	60.3	Rp 1 1/4"	2.3	4.50	30	1	90650
T-plus DN 65 x Rp 1 1/4	2 1/2"	76.1	Rp 1 1/4"	2.6	4.50	30	1	90665
T-plus DN 80 x Rp 1 1/4	3"	88.9	Rp 1 1/4"	2.9	5.00	30	1	90680



Type	Dimensions							
	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F + 13 [mm]	K [mm]	M [mm]
<b>T-plus DN 15 x</b> <b>Rp 1/2</b>	100	28	19	67	47	166	66	21
<b>T-plus DN 20 x</b> <b>Rp 1/2</b>	113	34	21	77	50	179	66	21
<b>T-plus DN 25 x</b> <b>Rp 3/4</b>	115	35	25	83	56	181	66	21
<b>T-plus DN 32 x</b> <b>Rp 1</b>	130	38	29	102	69	196	66	21
<b>T-plus DN 40 x</b> <b>Rp 1 1/4</b>	165	55	35	123	83	231	66	21
<b>T-plus DN 50 x</b> <b>Rp 1 1/4</b>	167	55	43	136	83	233	66	21
<b>T-plus DN 65 x</b> <b>Rp 1 1/4</b>	190	66	52	153	83	256	66	21
<b>T-plus DN 80 x</b> <b>Rp 1 1/4</b>	190	66	58	168	83	256	66	21

## Advantages


- Saves installation time and costs.
- Create branches while the system is still in operation.
- Draining is not necessary, so no air and dirt can get into the system.
- A perfect branch every time due to the trigger.
- Easy to create a branch, even where space is restricted.
- Optimum pipe seal.
- Anti-corrosion coating.
- Single use (one shot) trigger mechanism. The trigger is included with the T-plus.
- Simple preparatory installation with click-in nuts (on models from 1 1/2").

## Technical information

For steel pipes (St33, St34, St35, St37) from 1/2" to 3":

- Threaded pipes: NEN 3257 C Heavy, DIN 2441, BS 1387 Heavy (or lighter)/ISO 9329-1.
- Seamless steel pipes: DIN 2448/1629 Bl.3, St 35 / ISO 9330-1.
- Welded steel pipes: DIN 2458/1626 Bl.2, St 35.
- Material numbers:  
1.0035 (St33)  
1.0034, 10305 (St34)  
1.0308, 10345 (St35)  
1.0036, 1.0037, 1.0038, 1.0039, 1.0255, 1.0254 (St37).

- Maximum working pressure: 25 bar.
- Maximum permissible temperature: 120 °C.

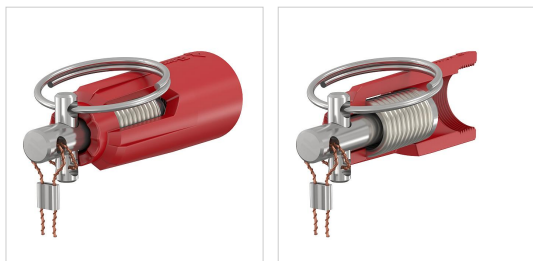

**Find more information online:**

[Manuals](#)

[Certificates](#)

[Extra documentation](#)

[Animations](#)

Page 3 of 3

© 2018 Flamco B.V. All rights reserved. We reserve the right to change designs and technical specifications of our products.