


Product Data Sheet

Flexfast $\frac{3}{4}$

This isolating union makes it possible to check quickly and easily if a Flexcon expansion vessel is still working correctly (gas charge) or if it needs to be replaced.

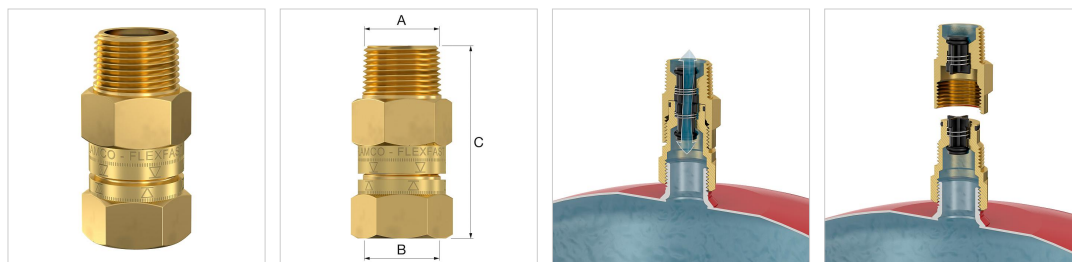

Type	Connection		Dimension C [mm]	###	Order Code
	A	B			
Flexfast $\frac{3}{4}$	R $\frac{3}{4}$ "	G $\frac{3}{4}$ " F	68	1	27920

Advantages

- Easy to assemble with the right tools; then just screw in the components by hand.
- Enable you to change the vessel without having to release pressure or drain the system.
- Saves a considerable amount of time when servicing a Flexcon vessel.

Technical information

- Minimum/Maximum working temperature: -10 °C / 90 °C (continuous).
- Working pressure: 0 - 10 bar.
- Suitable for addition of glycol-based anti-freeze up to 50%.
- Material: Brass.

Find more information online:

[Manuals](#)

[CAD drawings](#)

[Extra documentation](#)