


Product Data Sheet

Flexcon P 18 - 50

Oval shaped expansion vessels with reduced height and suspension eye. For use in sealed heating installations (acc. to EN12828) and chilled water (cooling) installations.

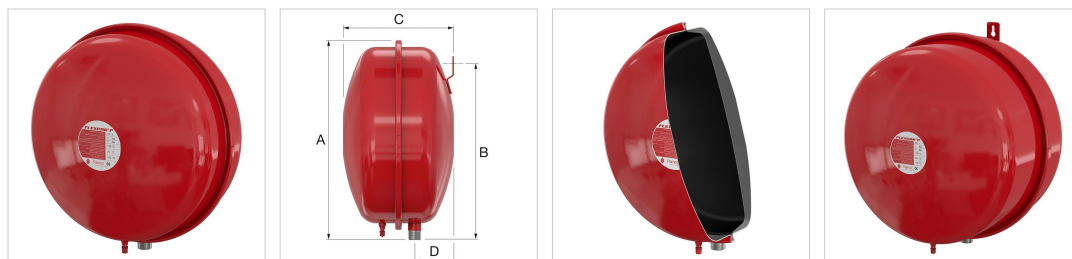

Type	Capacity [l]	Pre-charge [bar]	Dimensions				Syst. conn.	Weight [kg]	###	Order Code
			A [mm]	B [mm]	C [mm]	D [mm]				
Flexcon P 18	18	1.0	387	365	226	80	G 3/4" M	5.7	30	13316
Flexcon P 25	25	1.0	435	415	256	90	G 3/4" M	7.7	20	13326
Flexcon P 35	35	1.0	435	450	333	110	G 3/4" M	8.9	20	13336
Flexcon P 50	50	1.5	515	505	344	125	G 3/4" M	11.8	12	13357



Advantages

- Space-saving alternative for small installations.
- The oval shape combined with the practical suspension eye enables quick and easy mounting, optimising the use of space.
- Thanks to the design no stagnant water remains in the vessel.
- Diaphragm: butyl rubber.

Technical information

- Maximum working pressure: 3.0 bar.
- Vessels in accordance with EN13831.
- Suitable for systems with a maximum flow temperature of 120 °C.
- Maximum temperature diaphragm: 90 °C.
- Suitable for addition of glycol-based anti-freeze up to 50%.
- Deep drawn steel vessel halves with zinc plated steel clench ring (with red epoxy powder coating).
- In accordance with Pressure Equipment Directive 2014/68/EU.
- Red (RAL 3002) epoxy powder coating.