


Product Data Sheet

KCK Profile Clamps

For securing a single mounting next to or under a steel profile without welding or drilling.

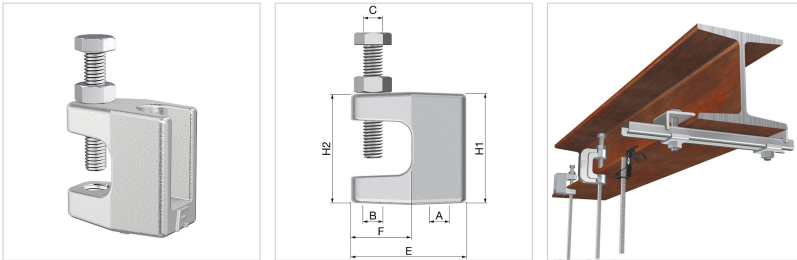

Type	Connection (A - B)	Max flange thickness [mm]	Bolt	Max. working load [N]	Dimensions				Treatment	Approval	###	Order Code
					H1 [mm]	H2 [mm]	E [mm]	F [mm]				
KCK 6	M 6 - M 8	18	M 6 x 35	2100	45	21	46	24	zinc plated	-	25	71535
KCK 8	M 8 - M 10	18	M 8 x 45	3800	45	21	46	24	zinc plated	VdS *	25	71536
KCK 10	M 10 - M 8	18	M 10 x 45	4500	45	21	46	24	zinc plated	FM/VdS *	25	71537
KCK 12	M 12 - M 12	18	M 10 x 45	5000	45	21	46	24	zinc plated	FM/VdS *	25	71538

* See VdS certificate (on website) for specific VdS validity. AS anchor strip (71700) may be required.



Advantages

- Vertically adjustable.
- The bottom provided with two different threaded connections.

Technical information

- Malleable cast iron, KCK GTS 45 - DIN 1692.
- Steel bolt: steel DIN 564-8.8.
- zinc plated.

Find more information online:

[Manuals](#)

[Certificates](#)

[Extra documentation](#)