


Product Data Sheet

BSA Clips - Stainless Steel

Stainless steel universal clips with rubber strips for mounting pipes to the wall or ceiling.

For use in situations where stainless steel mounting material is desired or required, such as food processing, facilities, laboratories, the chemical industry, etc.

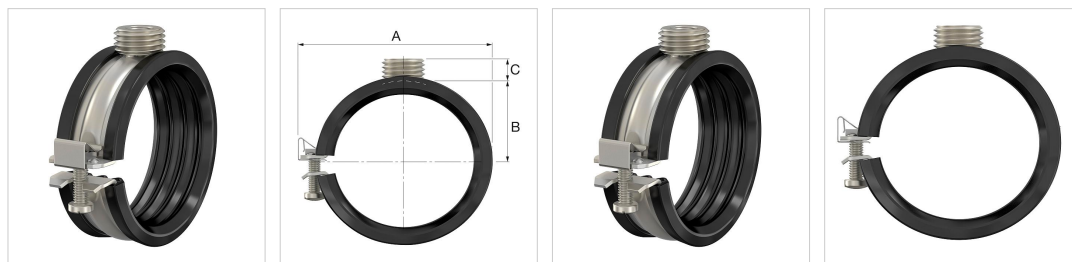

Type	Ø Pipe		Connection	Strip dimensions [mm]	Max. working load [N]	Dimensions			###	Order Code
	Nom. ["]	Ext. dia. [mm]				A [mm]	B [mm]	C [mm]		
BSA 14 - 16 SST		14 - 16	G 1/2" M / M 10	25 x 1.75	1000	47	15	10	50	51951
BSA 17 - 19 SST	3/8"	17 - 19	G 1/2" M / M 10	25 x 1.75	1000	50	17	10	50	51952
BSA 20 - 24 SST	1/2"	20 - 24	G 1/2" M / M 10	25 x 1.75	1000	54	19	10	50	51953
BSA 25 - 28 SST	3/4"	25 - 28	G 1/2" M / M 10	25 x 1.75	1000	59	21	10	50	51954
BSA 33 - 37 SST	1"	33 - 37	G 1/2" M / M 10	25 x 1.75	1000	70	27	10	50	51956
BSA 38 - 42 SST	1 1/4"	38 - 42	G 1/2" M / M 10	25 x 1.75	1000	78	31	10	50	51957
BSA 44.5 - 49 SST	1 1/2"	44.5 - 49	G 1/2" M / M 10	25 x 1.75	1000	83	34	10	50	51958
BSA 50 - 54 SST		50 - 54	G 1/2" M / M 10	25 x 1.75	1000	90	37	10	50	51959
BSA 56 - 60 SST	2"	56 - 60	G 1/2" M / M 10	25 x 1.75	1000	96	40	10	50	51960
BSA 62 - 64 SST		62 - 64	G 1/2" M / M 10	25 x 2.75	1750	119	43	10	25	51970
BSA 75 - 80 SST	2 1/2"	75 - 80	G 1/2" M / M 10	25 x 2.75	1750	133	50	10	25	51972
BSA 89 - 91 SST	3"	89 - 91	G 1/2" M / M 10	25 x 2.75	1750	145	56	10	25	51974
BSA 108 - 116 SST	4"	108 - 116	G 1/2" M / M 10	25 x 2.75	1750	168	67	10	25	51977
BSA 121 - 127 SST		121 - 127	G 1/2" M / M 10	25 x 2.75	1750	184	71	10	25	51979
BSA 159 - 162 SST		159 - 162	G 1/2" M / M 10	25 x 2.75	1750	220	93	10	25	51982

Technical information

- Stainless steel AISI 316 (1.4401 according to EN 10088).
 - Noise-suppressing rubber strip: 19 dB(A) according to ISO 3822-1.
- To achieve maximum sound suppression do not overload the fitting.
- Safety margin for minimal breaking load (V) = 3.
 - Connection: G ½" M (BSP) / M 10.

Find more information online:

[Extra documentation](#)