


17.



Stainless Steel Mounting Material

Flamco produces a wide range of stainless steel brackets and fittings for stainless steel pipes and tubes. These are ideal for use, not only in HVAC installations, but also in process industries where stainless steel pipe systems are specified.

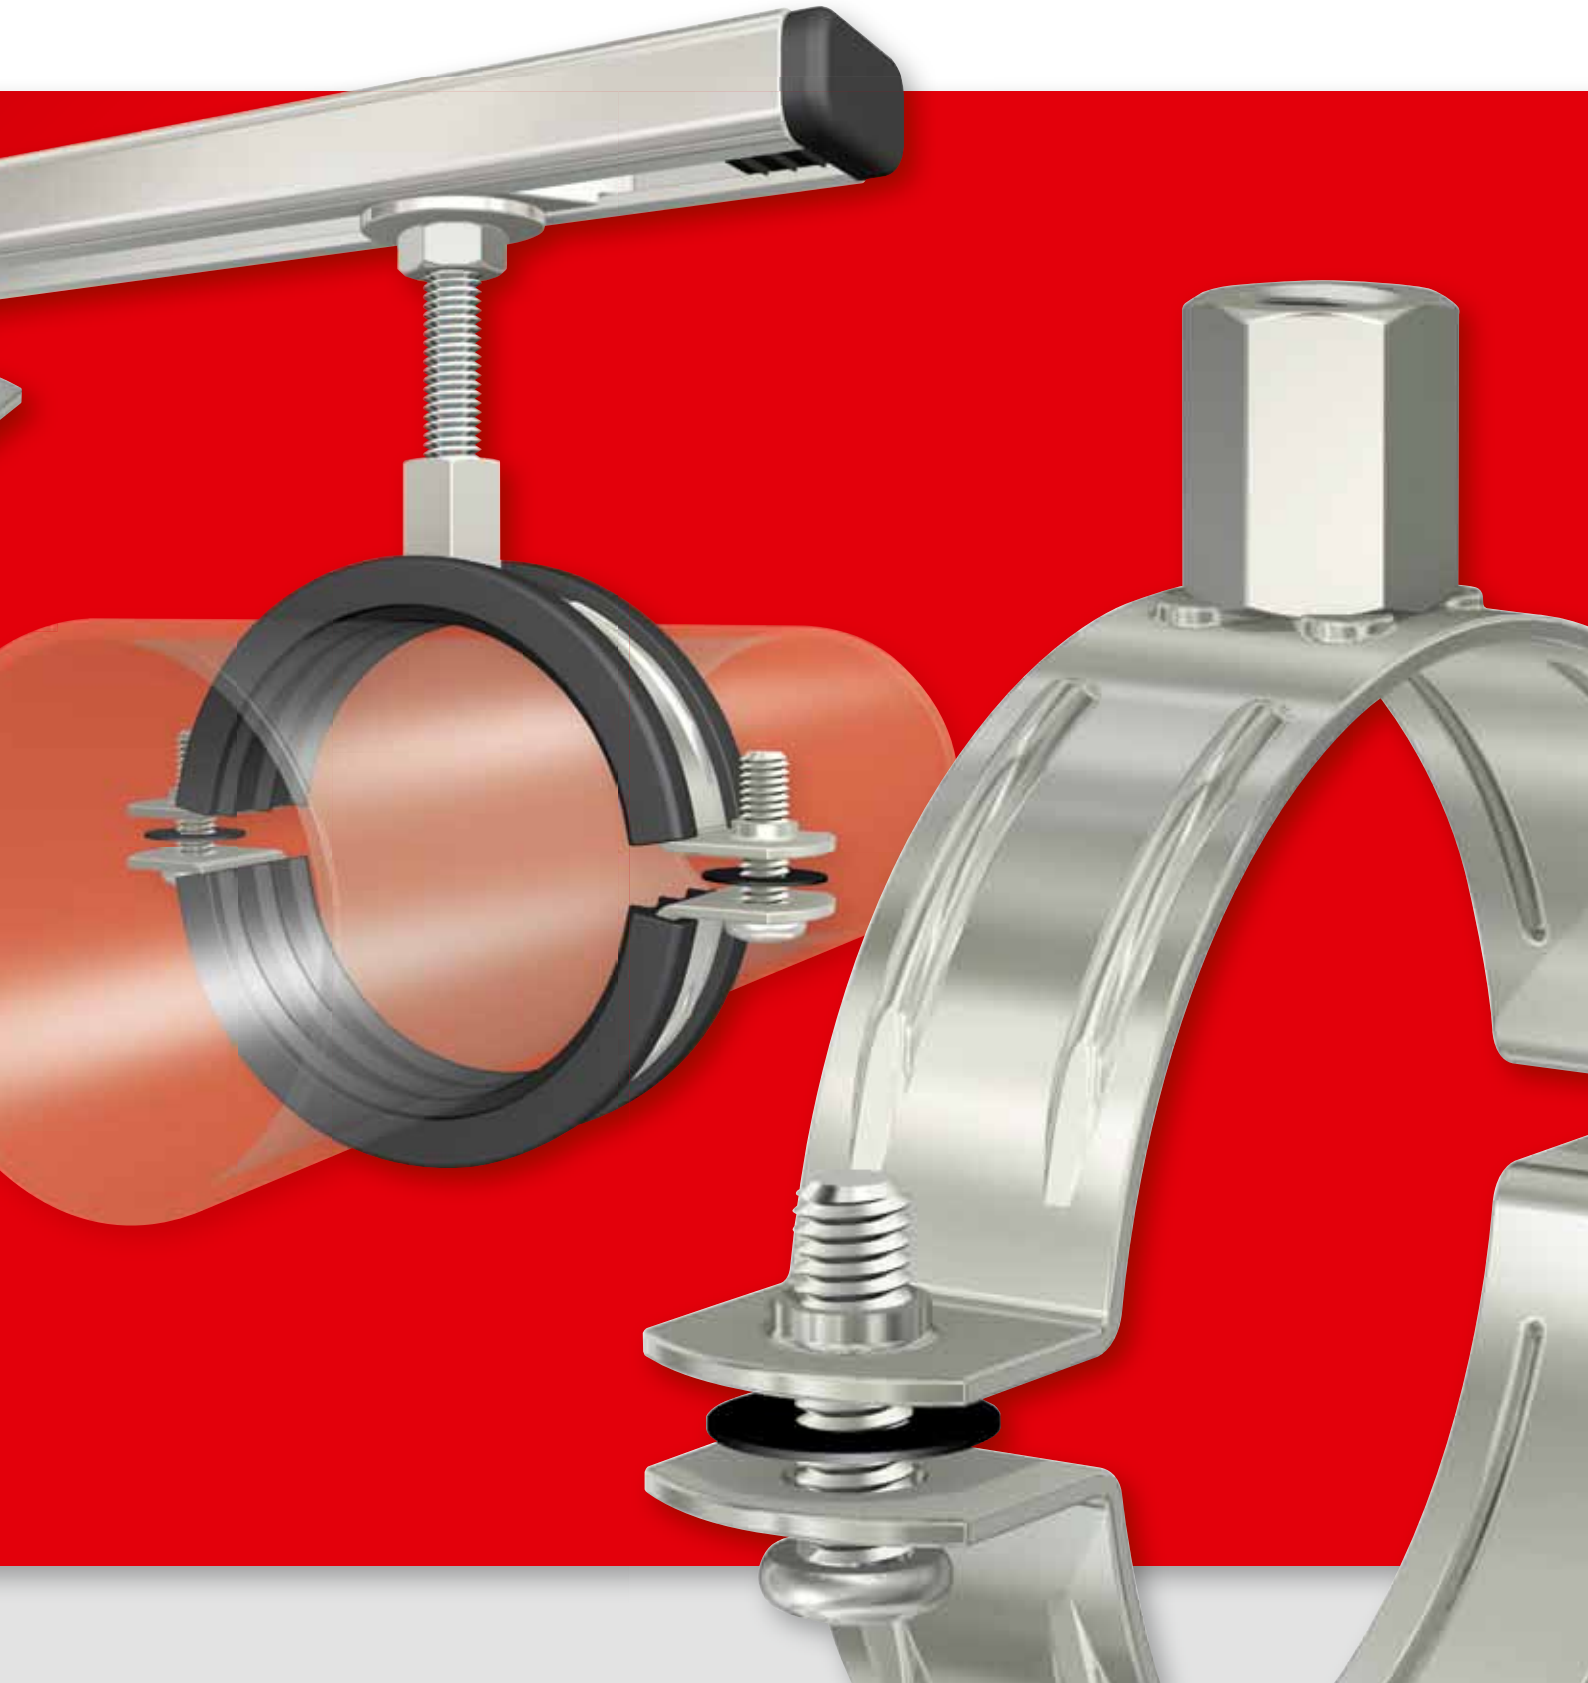



STAINLESS STEEL CLIPS

For use in situations where stainless steel mounting material is necessary, such as food processing, facilities, laboratories, the chemical industry, etc.

BRS M 8/10 - SST Clips

- Stainless steel 316 (1.4401 according to EN 10088).
- Suitable for short distance mounting.
- Safety load (V) = 3.

Type	Ø Pipe		Strip dimensions [mm]	Max. working load [N]		Order Code
	Nom. ["]	Ext. dia. [mm]				
BRS 15 - 19 SST	3/8"	15 - 19	20 / 1.5	1000	50	38477
BRS 20 - 25 SST	1/2"	20 - 25	20 / 1.5	1000	50	38478
BRS 26 - 30 SST	3/4"	26 - 30	20 / 1.5	1000	50	38479
BRS 32 - 36 SST	1"	32 - 36	20 / 1.5	1000	50	38480
BRS 38 - 43 SST	1 1/4"	38 - 43	20 / 1.5	1000	50	38481
BRS 44 - 49 SST	1 1/2"	44 - 49	20 / 1.5	1000	50	38482
BRS 50 - 55 SST	—	50 - 55	20 / 1.5	1000	50	38483
BRS 56 - 61 SST	2"	56 - 61	20 / 1.5	1000	50	38484
BRS 62 - 67 SST	—	62 - 67	20 / 2.0	1000	50	38485
BRS 68 - 73 SST	—	68 - 73	20 / 2.0	1300	50	38486
BRS 75 - 80 SST	2 1/2"	75 - 80	20 / 2.0	1300	50	38487
BRS 82 - 86 SST	3"	82 - 86	20 / 2.0	1300	50	38488
BRS 95 - 102 SST	3 1/2"	95 - 102	20 / 2.5	2150	50	38490
BRS 108 - 116 SST	4"	108 - 116	20 / 2.5	2150	25	38491
BRS 121 - 127 SST	—	121 - 127	20 / 2.5	2150	25	38492
BRS 131 - 141 SST	5"	131 - 141	20 / 2.5	2150	25	38493
BRS 159 - 163 SST	6"	159 - 163	20 / 2.5	2150	25	38494
BRS 192 - 202 SST	—	192 - 202	20 / 3.0	2150	25	38496
BRS 210 - 220 SST	8"	210 - 220	20 / 3.0	2150	25	38497



BRS-A M 8/10 - SST Clips

- Stainless steel 316 (1.4401 according to EN 10088).
- Suitable for short distance mounting.
- Noise-suppression rubber strip according to DIN 4109.
- Safety load (V) = 3.

Type	Ø Pipe		Strip dimensions [mm]	Max. working load [N]		Order Code
	Nom. ["]	Ext. dia. [mm]				
BRS-A 8 - 10 SST	1/8"	8 - 10	20 / 1.5	1000	50	38450
BRS-A 15 - 19 SST	3/8"	15 - 19	20 / 1.5	1000	50	38452
BRS-A 20 - 25 SST	1/2"	20 - 25	20 / 1.5	1000	50	38453
BRS-A 26 - 30 SST	3/4"	26 - 30	20 / 1.5	1000	50	38454
BRS-A 32 - 36 SST	1"	32 - 36	20 / 1.5	1000	50	38455
BRS-A 38 - 43 SST	1 1/4"	38 - 43	20 / 1.5	1000	50	38456
BRS-A 44 - 49 SST	1 1/2"	44 - 49	20 / 1.5	1000	50	38457
BRS-A 50 - 55 SST	1 3/4"	50 - 55	20 / 1.5	1000	50	38458
BRS-A 56 - 61 SST	2"	56 - 61	20 / 1.5	1000	50	38459
BRS-A 68 - 73 SST	2 1/4"	67 - 73	20 / 2.0	1300	50	38461
BRS-A 75 - 80 SST	2 1/2"	75 - 80	20 / 2.0	1300	50	38462
BRS-A 87 - 92 SST	3"	87 - 92	20 / 2.0	1300	50	38464
BRS-A 95 - 102 SST	3 1/2"	95 - 102	20 / 2.5	2150	50	38465
BRS-A 108 - 116 SST	4"	108 - 116	20 / 2.5	2150	25	38466
BRS-A 121 - 127 SST	—	121 - 127	20 / 2.5	2150	25	38467
BRS-A 131 - 141 SST	5"	131 - 141	20 / 2.5	2150	25	38468
BRS-A 159 - 163 SST	6"	159 - 163	20 / 2.5	2150	25	38469
BRS-A 192 - 202 SST	—	192 - 202	20 / 3.0	2150	25	38471
BRS-A 210 - 220 SST	8"	210 - 220	20 / 3.0	2150	25	38473



BSF ½ / M 10 - SST Clips

- Stainless steel 316.

Type	Ø Pipe		Connection	Strip dimensions [mm]		Order Code
	Nom. ["]	Ext. dia. [mm]				
BSF 13 - 17.5 SST	3/8"	13 - 17.5	½" / M 10	20 / 2.5	50	51851
BSF 21 - 25.5 SST	1/2"	21 - 25.5	½" / M 10	20 / 2.5	50	51852
BSF 26.5 - 30.5 SST	3/4"	26.5 - 30.5	½" / M 10	20 / 2.5	50	51853
BSF 33.5 - 38.5 SST	1"	33.5 - 38.5	½" / M 10	20 / 2.5	50	51854
BSF 41.5 - 47 SST	1 1/4"	41.5 - 47	½" / M 10	20 / 2.5	50	51855
BSF 48 - 54 SST	1 1/2"	48 - 54	½" / M 10	20 / 2.5	50	51856
BSF 56 - 62.5 SST	2"	56 - 62.5	½" / M 10	20 / 2.5	50	51857
BSF 69.5 - 76.5 SST	2 1/2"	69.5 - 76.5	½" / M 10	20 / 2.5	50	51859
BSF 77.5 - 84 SST	-	77.5 - 84	½" / M 10	25 / 3.0	10	51860
BSF 85 - 92.5 SST	3"	85 - 92.5	½" / M 10	25 / 3.0	10	51861
BSF 93 - 100.5 SST	-	93 - 100.5	½" / M 10	25 / 3.0	25	51862
BSF 101.5 - 110 SST	-	101.5 - 110	½" / M 10	25 / 3.0	25	51863
BSF 110 - 117.5 SST	4"	110 - 117.5	½" / M 10	25 / 3.0	25	51864
BSF 119.5 - 127.5 SST	-	119.5 - 127.5	½" / M 10	25 / 3.0	25	51865
BSF 127.5 - 133.5 SST	-	127.5 - 133.5	½" / M 10	25 / 3.0	25	51866
BSF 134.5 - 142.5 SST	5"	134.5 - 142.5	½" / M 10	30 / 3.0	25	51867
BSF 143.5 - 150.5 SST	-	143.5 - 150.5	½" / M 10	30 / 3.0	25	51868
BSF 151.5 - 159.5 SST	-	151.5 - 159.5	½" / M 10	30 / 3.0	25	51869
BSF 163.5 - 171.5 SST	6"	163.5 - 171.5	½" / M 10	30 / 3.0	25	51870
BSF 172.5 - 182 SST	-	172.5 - 182	½" / M 10	30 / 3.0	25	51871
BSF 192.5 - 198 SST	-	192.5 - 198	½" / M 10	30 / 3.0	25	51872
BSF 215 - 220 SST	8"	215 - 220	½" / M 10	30 / 3.0	25	51873

**BSA ½ / M 10 - SST Clips**

- Stainless steel 316.
 - Noise-suppressing rubber strip: 19 dB(A)* according to ISO 38221
- (* To achieve good sound attenuation do not overload the fitting).

Type	Ø Pipe		Connection	Strip dimensions [mm]		Order Code
	Nom. ["]	Ext. dia. [mm]				
BSA 14 - 16 SST	-	14 - 16	½" / M 10	25 / 1.75	50	51951
BSA 17 - 19 SST	3/8"	17 - 19	½" / M 10	25 / 1.75	50	51952
BSA 20 - 24 SST	1/2"	20 - 24	½" / M 10	25 / 1.75	50	51953
BSA 25 - 28 SST	3/4"	25 - 28	½" / M 10	25 / 1.75	50	51954
BSA 33 - 37 SST	1"	33 - 37	½" / M 10	25 / 1.75	50	51956
BSA 38 - 42 SST	1 1/4"	38 - 42	½" / M 10	25 / 1.75	50	51957
BSA 44.5 - 49 SST	1 1/2"	44.5 - 49	½" / M 10	25 / 1.75	50	51958
BSA 50 - 54 SST	-	50 - 54	½" / M 10	25 / 1.75	50	51959
BSA 56 - 60 SST	2"	56 - 60	½" / M 10	25 / 1.75	50	51960
BSA 62 - 64 SST	-	62 - 64	½" / M 10	25 / 2.75	25	51970
BSA 75 - 80 SST	2 1/2"	75 - 80	½" / M 10	25 / 2.75	25	51972
BSA 89 - 91 SST	3"	89 - 91	½" / M 10	25 / 2.75	25	51974
BSA 108 - 116 SST	4"	108 - 116	½" / M 10	25 / 2.75	25	51977
BSA 121 - 127 SST	-	121 - 127	½" / M 10	25 / 2.75	25	51979
BSA 159 - 162 SST	-	159 - 162	½" / M 10	25 / 2.75	25	51982





STAINLESS STEEL RAIL

For fast and easy mounting of one or more suspensions or wall fixings.

R . Rail - Stainless Steel

- Stainless steel 304.
- With slotted holes for adjustable mounting.

Type	Dimensions					Order Code
	L. [mm]	H. [mm]	W. [mm]	Th. [mm]		
R 1 SST	200	15	30.5	2.0	10	50030
R 4 SST	200	46	35.0	2.5	10	50034



STAINLESS STEEL RAIL CONSOLES

For suspension or support directly on the wall.

R . x ... Rail Consoles - Stainless Steel

- Stainless steel 304.

Type	L. [mm]		Order Code
R 1 x 100 SST	100	10	71671
R 1 x 200 SST	200	10	71672
R 1 x 300 SST	300	10	71673
R 1 x 400 SST	400	10	71674
R 4 x 300 SST	300	10	71683
R 4 x 500 SST	500	10	71686



STAINLESS STEEL RAIL SUPPORT NUTS

M ..s Rail Support Nuts - Stainless Steel

- Stainless steel 304.

Type	Connection		Order Code
M 8s SST	M 8	100	80322
M 10s SST	M 10	100	80323



STAINLESS STEEL WASHERS

S Washers - Stainless Steel

- Stainless steel 304.

Type	Connection	Ø Ext. [mm]		Order Code
S 8 SST	M 8	18	100	70822
S 10 SST	M 10	22	100	70823
S 12 SST	M 12	28	100	70824



STAINLESS STEEL NUTS

M Nuts - Stainless Steel

- Stainless steel 304.

Type	Connection		Order Code
M 8 SST	M 8	100	70222
M 10 SST	M 10	100	70223
M 12 SST	M 12	50	70224



STAINLESS STEEL THREADED PRODUCTS

D Threaded Rods - Stainless Steel

For all suspensions and assemblies with threaded rod.

- Stainless steel 304.

Type	L. [mm]	Connection		Order Code
D 8 SST	1000	M 8	10	70052
D 10 SST	1000	M 10	10	70053
D 12 SST	1000	M 12	10	70054

**Wood Screw Studs - Stainless Steel**

- Stainless steel 304.

Type	L. [mm]	Connection		Order Code
Dowel screw 10 x 60 SST	60	M 10	1	51750
Dowel screw 10 x 80 SST	80	M 10	1	51751
Dowel screw 10 x 100 SST	100	M 10	1	51752
Dowel screw 10 x 120 SST	120	M 10	1	51753
Dowel screw 10 x 140 SST	140	M 10	1	51754
Dowel screw 10 x 160 SST	160	M 10	1	51755

**HO Wood Screw Studs - Stainless Steel**

- Stainless steel 304.
- Supplied with hexagonal midsection.

Type	L. [mm]	Connection		Order Code
HO 8 x 80 SST	80	M 8	100	70621
HO 8 x 100 SST	100	M 8	100	70624
HO 10 x 80 SST	80	M 10	100	70622
HO 10 x 100 SST	100	M 10	100	70625

**Bushing - Stainless Steel**

- Stainless steel 304.

Type	Connection		Order Code
Sleeve 1/2 SST	1/2"	100	52815



STAINLESS STEEL BACKPLATES

For mounting of a clip on a wall or ceiling, in conjunction with threaded rod or threaded pipe.

GP Backplates - Stainless Steel

- Stainless steel 304.
- Available with M 8, M 10 or M 8/10 connection.
- Slotted holes for mounting.

Type	Connection		Order Code
GP 8 - 80 x 30 SST	M 8	50	39445
GP 10 - 80 x 30 SST	M 10	50	39446
GP 8/10 - 70 x 20 SST	M 8/10	100	39403



STAINLESS STEEL HAMMERHEAD BOLT SETS

HBS - Stainless Steel

- Stainless steel 304.

Type	Connection	Length thread [mm]		Order Code
HBS 10 x 60 SST	M 10	55	100	70484

